SELF-DIAGNOSTIC FUNCTION

SERVICE MANUAL

BA-4 CHASSIS

MODEL	COMMANDER	DEST.	CHASSIS NO.
KV-27V40	RM-Y165	US	SCC-S01L-A
KV-27V40	RM-Y165	CND	SCC-S03H-A
KV-27V45	RM-Y167	US	SCC-S01M-A
KV-27V45	RM-Y167	CND	SCC-S03J-A
KV-27V65	RM-Y167	US	SCC-S01N-A
KV-27V65	RM-Y167	CND	SCC-S03K-A
KV-29VL40	RM-Y165	E	SCC-S06B-A
KV-29VL65A	RM-Y167	E	SCC-S06A-A
KV-29VL65C	RM-Y167	E	SCC-S06D-A
KV-29VL85	RM-Y167	E	SCC-S06C-A
KV-29VL95	RM-Y167	E	SCC-S06E-A

KV-27V45

RM-Y167

MICROFILM

TRINITRON® COLOR TV

SONY®

SPECIFICATIONS

		KV-27V40 KV-27VL40	KV-27V45 KV-29VL85	KV-27V65 KV-29VL65A/65C KV-29VL95
Power requirements		120V,60Hz	120V,60Hz	120V,60Hz (KV-27V65/29VL95) 220V, 50/60Hz (KV-29VL65A/65C)
Number of inputs/outputs				
	Video [1]	2	3	3
	S Video [2]	1	1	1
	Audio [3]	2	3	3
	Audio Out [4]	1	1	1
	Monitor Out	1	1	1
	Speaker output (W)	5Wx2	5W x 2	10WX2
Power Consumption (W)	In use (max.)	140W	140W	170W
	In standby	2W	2W	2W (KV-29VL95) 3W (KV-27V65/29VL65A/65C)
Dimensions (W/H/D)	(mm)	690 x 575.4 x 503.4mm		
	(in.)	$27^{1/4}$ x $22^{3/4}$ X$19^{7/8}$		
Mass	(kg.)	42.4kg		
	(lbs.)	93 lbs.		

[1] 1 Vp-p 75 ohms unbalanced, sync negative
[2] Y: 1 Vp-p 75 ohms unbalanced, sync negative
C: 0.286 Vp-p (Burst signal), 75 ohms
[3] 500 mVrms (100% modulation), Impedance: 47 kilohms
[4] More than 408 mVrms at the maximum volume setting (variable)

Television system
American TV standard (all models except KV-29VL65A)
PAL-M, PAL-L, NTSC (KV-29VL65A only)

Channel coverage
VHF:2-13/UHF:14-69/CATV:1-125

Visible screen size
27-inch picture measured (KV-27V40/V45/V65)
29-inch picture measured (KV-29VL40/65A/65C/85/95)

Actual screen size
27-inch picture measured (KV-27V40/V45/V65)
29-inch picture measured (KV-29VL40/65A/65C/85/95)

Antenna
75 ohm external terminal for VHF/UHF

Supplied Accessories
Remote commander (w/2 size AA (R6) batteries)
RM-Y165: (KV-27V40/29VL40)
RM-Y167: (KV-27V45/65, 29VL65A/65C/85/95)

Optional Accessory
Connecting Cables:
VMC-810S/820S, VMC-720M, YC-15V/30V
TV Stand SU-27A3
VHF, UHF Mixer EAC-66

Design and specifications are subject to change without notice.

(●)® SRS (SOUND RETRIEVAL SYSTEM)

The (●) SRS (SOUND RETRIEVAL SYSTEM) is manufactured by Sony Corporation under license from SRS Labs, Inc. It is covered by U.S. Patent No. 4,748,669. Other U.S. and foreign patents pending.

The word 'SRS' and the SRS symbol (●) are registered trademarks of SRS Labs, Inc.

BBE and BBE symbol are trademarks of BBE Sound,Inc. and are licensed by BBE Sound, Inc. under U.S.Patent No. 4,638,258 and 4,482,866.

TABLE OF CONTENTS

Section *Title* *Page*

Warnings and Caution 4
Self-Diagnostic Function 4
Safety Check Out Instructions 7

1. GENERAL

Connecting and Installing the TV 8
Basic Set Up 12
Using Your TV..... 12
Using Your Menus..... 15
Operating Video Equipment..... 19
Operating a Cable Box or DBS Receiver..... 20
Troubleshooting..... 20

2. DISASSEMBLY

2-1. Rear Cover Removal 22
2-2. Control Switch Removal 22
2-3. Chassis Assembly Removal..... 22
2-4. Service Position 22
2-5. Picture Tube Removal 23

3. SET-UP ADJUSTMENTS

3-1. Beam Landing..... 24
3-2. Convergence..... 25
3-3. Focus..... 26
3-4. Screen (G2)..... 26
3-5. Method of Setting the Service Adjustment Mode..... 26
3-6. White Balance Adjustments..... 26

4. SAFETY RELATED ADJUSTMENTS..... 27

5. CIRCUIT ADJUSTMENTS

5-1. Electrical Adjustment by Remote Commander..... 29
5-2. A Board Adjustments..... 32

Section *Title* *Page*

6. DIAGRAMS

6-1. Block Diagrams..... 35
6-2. Circuit Boards Location..... 38
6-3. Printed Wiring Boards and Schematic Diagrams 38
- A Board..... 39
- P Board..... 47
- K Board 49
- HZ Board..... 50
- E Board 50
- CV Board..... 51
- HV Board..... 53

6-4. Semiconductors..... 55

7. EXPLODED VIEWS

7-1. One Tuner Chassis 56
(KV-27V40/27V45/29VL40/29VL85)
7-2. Two Tuner Chassis..... 57
(KV-27V65/29VL65A/29VL65C/29VL95)
7-3. Main Power Switch..... 58
(KV-29VL65A)

8. ELECTRICAL PARTS LIST

- Table of Contents for Parts List..... 59
- A Board Common Parts List..... 61
- A Board Variant Lists..... 70
- CV Board Parts List..... 79
- E Board Parts List..... 80
- HV Board Parts List..... 81
- HZ Board Parts List..... 82
- K Board Parts List..... 83
- P Board Parts List..... 84
- Accessories and Packaging..... 86

WARNINGS AND CAUTIONS

CAUTION!

SHORT CIRCUIT THE ANODE OF THE PICTURE TUBE AND THE ANODE CAP TO THE METAL CHASSIS, CRT SHIELD, OR CARBON PAINTED ON THE CRT, AFTER REMOVING THE ANODE.

WARNING!!

AN ISOLATION TRANSFORMER SHOULD BE USED DURING ANY SERVICE TO AVOID POSSIBLE SHOCK HAZARD, BECAUSE OF LIVE CHASSIS.THE CHASSIS OF THIS RECEIVER IS DIRECTLY CONNECTED TO THE AC POWER LINE.

SAFETY-RELATED COMPONENT WARNING!!

COMPONENTS IDENTIFIED BY SHADING AND MARK ⚠ ON THE SCHEMATIC DIAGRAMS, EXPLODED VIEWS AND IN THE PARTS LIST ARE CRITICAL FOR SAFE OPERATION. REPLACE THESE COMPONENTS WITH SONY PARTS WHOSE PART NUMBERS APPEAR AS SHOWN IN THIS MANUAL OR IN SUPPLEMENTS PUBLISHED BY SONY. CIRCUIT ADJUSTMENTS THAT ARE CRITICAL FOR SAFE OPERATION ARE IDENTIFIED IN THIS MANUAL. FOLLOW THESE PROCEDURES WHENEVER CRITICAL COMPONENTS ARE REPLACED OR IMPROPER OPERATION IS SUSPECTED.

ATTENTION

APRES AVOIR DECONNECTE LE CAP DE L'ANODE, COURT-CIRCUITER L'ANODE DU TUBE CATHODIQUE ET CELUI DE L'ANODE DU CAP AU CHASSIS METALLIQUE DE L'APPAREIL, OU AU COUCHE DE CARBONE PEINTE SUR LE TUBE CATHODIQUE OU AU BLINDAGE DU TUBE CATHODIQUE.

ATTENTION!!

AFIN D'EVITER TOUT RESQUE D'ELECTROCUTION PROVENANT D'UN CHÁSSIS SOUS TENSION, UN TRANSFORMATEUR D'ISOLEMENT DOIT ETRE UTILISÉ LORS DE TOUT DÉPANNAGE. LE CHÁSSIS DE CE RÉCEPTEUR EST DIRECTEMENT RACCORDÉ À L'ALIMENTATION SECTEUR.

ATTENTION AUX COMPOSANTS RELATIFS A LA SECURITE!!

LES COMPOSANTS IDENTIFIES PAR UNE TRAME ET PAR UNE MARQUE ⚠ SUR LES SCHEMAS DE PRINCIPE, LES VUES EXPLOSEES ET LES LISTES DE PIECES SONT D'UNEIMPORTANCE CRITIQUE POUR LA SECURITE DU FONCTIONNEMENT. NE LES REMPLACER QUE PAR DES COMPOSANTS SONY DONT LE NUMERO DE PIECE EST INDIQUE DANS LE PRESENT MANUEL OU DANS DES SUPPLEMENTS PUBLIES PAR SONY. LES REGLAGES DE CIRCUIT DONT L'IMPORTANCE EST CRITIQUE POUR LA SECURITE DU FONCTIONNEMENT SONT IDENTIFIES DANS LE PRESENT MANUEL. SUIVRE CES PROCEDURES LORS DE CHAQUE REMPLACEMENT DE COMPOSANTS CRITIQUES, OU LORSQU'UN MAUVAIS FONTIONNEMENT SUSPECTE.

SELF-DIAGNOSTIC FUNCTION

The units in this manual contain a self-diagnostic function. If an error occurs, the STANDBY/TIMER lamp will automatically begin to flash. The number of times the lamp flashes translates to a probable source of the problem. A definition of the STANDBY/TIMER lamp flash indicators is listed in the instruction manual for the user's knowledge and reference. If an error symptom cannot be reproduced, the remote commander can be used to review the failure occurrence data stored in memory to reveal past problems and how often these problems occur.

1. DIAGNOSTIC TEST INDICATORS

When an error occurs, the STANDBY/TIMER lamp will flash a set number of times to indicate the possible cause of the problem. If there is more than one error, the lamp will identify the first of the problem areas.

Results for all of the following diagnostic items are displayed on screen. No error has occured if the the screen displays a "0" .

Diagnostic Item Description	No. of times STANDBY/TIMER lamp flashes	Self-diagnostic display/ Diagnostic result	Probable Cause Location	Detected Symptoms
* Power does not turn on	Does not light	———	* Power cord is not plugged in. * Fuse is burned out (F5050) (E Board)	* Power does not come on. * No power is suppled to the TV. * AC power supply is faulty.
* +B overcurrent (OCP)	2 times	2:0 or 2:1	* H.OUT (Q502) is shorted. (A board) * IC1701, Q946, Q947 is shorted. (C board)	* Power does not come on. * Load on power line is shorted.
* Vertical deflection stopped	4 times	4:0 or 4:1	* +13V is not supplied. (A board) * IC 541 is faulty (A board)	* Has entered standby state after horizontal raster. * Vertical deflection pulse is stopped. * Power line is shorted or power supply is stopped.
* White balance failure (not balanced)	5 times	5:0 or 5:1	* Video OUT (Q306, Q307, Q308) is faulty. (A board) * IC301 is faulty. (A board) * G2 is improperly adjusted. (Note 2)	* No raster is generated. * CRT cathode current detection reference pulse output is small.

Note 1: If a +B overcurrent is detected, stoppage of the vertical deflection is detected simultaneously.
The symptom that is diagnosed first by the microcontroller is displayed on the screen.

Note 2: Refer to Screen (G2) Adjustment in Section 3-4 of this manual.

2. DISPLAY OF STANDBY/TIMER LIGHT FLASH COUNT

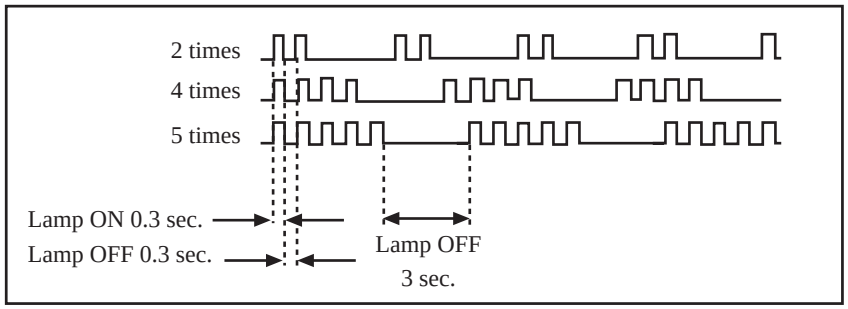

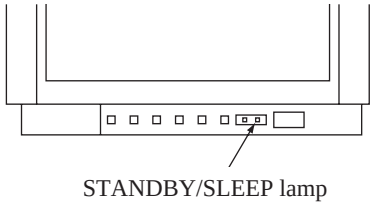

Diagnostic Item	Flash Count*
+B overcurrent	2 times
Vertical deflection stopped	4 times
White balance failure	5 times

* One flash count is not used for self-diagnostic.

3. STOPPING THE STANDBY/TIMER FLASH

Turn off the power switch on the TV main unit or unplug the power cord from the outlet to stop the STANDBY/TIMER lamp from flashing.

4. SELF-DIAGNOSTIC SCREEN DISPLAY

For errors with symptoms such as "power sometimes shuts off" or "screen sometimes goes out" that cannot be confirmed, it is possible to bring up past occurances of failure for confirmation on the screen:

[To Bring Up Screen Test]

In standby mode, press buttons on the remote commander sequentially in rapid succession as shown below:

[Screen display] ➡ channel [5] ➡ Sound volume [−] ➡ Power ON

⇧

Note that this differs from entering the service mode (sound volume [+]).

Self-Diagnostic screen display

```
SELF DIAGNOSTIC

2:          0  <----------Numeral "0" means that no fault has been detected.
3:    N/A   0
4:          0
5:          1  <----------Numeral "1" means a fault has been detected one time only.
101:  N/A   0
```

5. HANDLING OF SELF-DIAGNOSTIC SCREEN DISPLAY

Since the diagnostic results displayed on the screen are not automatically cleared, always check the self-diagnostic screen during repairs. When you have completed the repairs, clear the result display to "0".

Unless the result display is cleared to "0", the self-diagnostic function will not be able to detect subsequent faults after completion of the repairs.

[Clearing the result display]

To clear the result display to "0", press buttons on the remote commander sequentially as shown below when the diagnostic screen is being displayed.

Channel [8] ➡ [ENTER]

[Quitting Self-diagnostic screen]

To quit the entire self-diagnostic screen, turn off the power switch on the remote commander or the main unit.

6. SELF-DIAGNOSTIC CIRCUIT

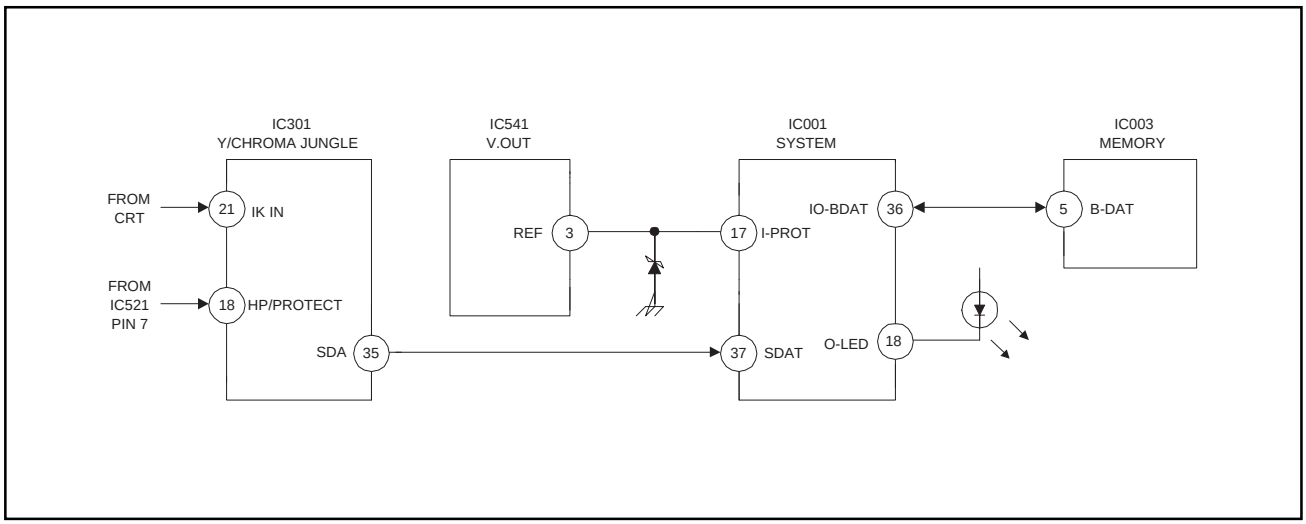

+B overcurrent (OCP)	Occurs when an overcurrent on the +B(115V) line is detected by pin 18 of IC301. If the voltage to pin 18 of IC301 is less than 1V when V.SYNC is more than seven verticals in a period, the unit will automatically turn off.
Vertical deflection stopped	Occurs when an absence of the vertical deflection pulse is detected by pin 17 of IC001. Power supply will shut down when waveform interval exceeds 2 seconds.
White balance failure	If the RGB levels* do not balance within 2 seconds after the power is turned on, this error will be detected by IC301. TV will stay on, but there will be no picture.

*(Refers to the RGB levels of the AKB detection Ref pulse that detects IK.)

SAFETY CHECK-OUT

After correcting the original service problem, perform the following safety checks before releasing the set to the customer:

1. Check the area of your repair for unsoldered or poorly-soldered connections. Check the entire board surface for solder splashes and bridges.
2. Check the interboard wiring to ensure that no wires are "pinched" or contact high-wattage resistors.
3. Check that all control knobs, shields, covers, ground straps, and mounting hardware have been replaced. Be absolutely certain that you have replaced all the insulators.
4. Look for unauthorized replacement parts, particularly transistors, that were installed during a previous repair. Point them out to the customer and recommend their replacement.
5. Look for parts which, though functioning, show obvious signs of deterioration. Point them out to the customer and recommend their replacement.
6. Check the line cords for cracks and abrasion. Recommend the replacement of any such line cord to the customer.
7. Check the B+ and HV to see if they are specified values. Make sure your instruments are accurate; be suspicious of your HV meter if sets always have low HV.
8. Check the antenna terminals, metal trim, "metallized" knobs, screws, and all other exposed metal parts for AC Leakage. Check leakage as described below.

LEAKAGE TEST

The AC leakage from any exposed metal part to earth ground and from all exposed metal parts to any exposed metal part having a return to chassis, must not exceed 0.5 mA (500 microampere). Leakage current can be measured by any one of three methods.

1. A commercial leakage tester, such as the Simpson 229 or RCA WT-540A. Follow the manufacturers' instructions to use these instructions.
2. A battery-operated AC milliammeter. The Data Precision 245 digital multimeter is suitable for this job.
3. Measuring the voltage drop across a resistor by means of a VOM or battery-operated AC voltmeter. The "limit" indication is 0.75 V, so analog meters must have an accurate low voltage scale. The Simpson's 250 and Sanwa SH-63Trd are examples of passive VOMs that are suitable. Nearly all battery operated digital multimeters that have a 2V AC range are suitable. (See Fig. A)

HOW TO FIND A GOOD EARTH GROUND

A cold-water pipe is guaranteed earth ground; the cover-plate retaining screw on most AC outlet boxes is also at earth ground. If the retaining screw is to be used as your earth-ground, verify that it is at ground by measuring the resistance between it and a cold-water pipe with an ohmmeter. The reading should be zero ohms. If a cold-water pipe is not accessible, connect a 60-l00 watts trouble light (not a neon lamp) between the hot side of the receptacle and the retaining screw. Try both slots, if necessary, to locate the hot side of the line, the lamp should light at normal brilliance if the screw is at ground potential. (See Fig. B)

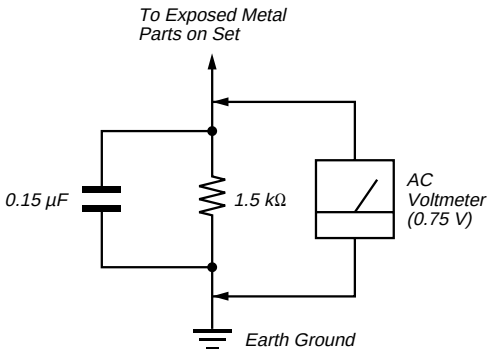

Fig. A. Using an AC voltmeter to check AC leakage.

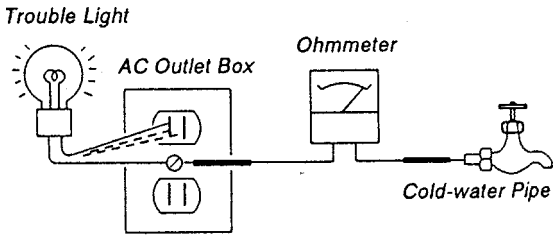

Fig B. Checking for earth ground.

SECTION 1
GENERAL

The instructions mentioned here are partial abstracts from the Operating Instruction Manual.
The page numbers shown reflect those of the Operating Instruction Manual.

Connecting and Installing the TV

Making Connections

Refer to the table below, it will direct you to the diagram suitable to the components you will be connecting.

If you will be connecting	See page
Cable or antenna only	5
Cable and antenna (KV-27S65, 27V65 only)	5
Cable box	6
Cable box and cable to view scrambled channels (KV-27S65, 27V65 only)	6
VCR and cable or antenna	7
VCR and cable box	7
Direct Broadcast Satellite Receiver (DBS)	8
VCR and Direct Broadcast Satellite Receiver (DBS)	9
Digital Versatile Disc receiver (DVD)	10
Audio system	10
Two VCRs for tape editing (KV-27V40, 27V45, 27V65 only)	11
Camcorder to view tapes	11

Cable or Antenna Connections

Connecting directly to cable or an antenna

The connection you choose will depend on the cable found in your home. Newer homes will be equipped with standard coaxial cable (see **A**); older homes will probably have 300-ohm twin lead cable (see **B**); still other homes may contain both (see **C**).

A

- VHF only
  or
- VHF/UHF
  or
- Cable



B

- VHF only
  or
- UHF only
  or
- VHF/UHF



C

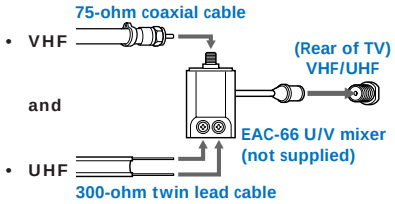

Cable and antenna

• **KV-27S65, 27V65 only**

If your cable provider does not feature local channels, you may find this set up convenient.

Select Cable or ANT mode by pressing ANT on the remote control. You will be able to alternate between the two input sources.

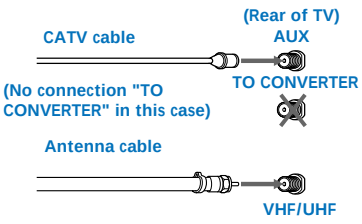

Note

- In order to receive channels with an antenna, you will need to turn your CABLE to OFF (see page 23) and perform the AUTO PROGRAM function.

Connecting and Installing the TV (continued)

Cable Box Connections

Some pay cable TV systems use scrambled or encoded signals that require a cable box* to view all channels.

Cable box

1 Connect the coaxial connector from your cable or antenna to the IN on your cable box.

2 Using a coaxial cable, connect OUT on your cable box to VHF/UHF on your TV.

If you will be controlling all channel selection through your cable box, you should consider using the CHANNEL FIX feature discussed on page 23.

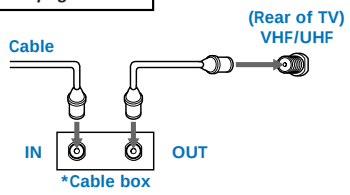

Cable box and cable

• **KV-27S65, 27V65 only**

For this set up, you can switch between scrambled channels (through your cable box), and normal (CATV) channels by pressing ANT on your remote control.

If you are connecting a cable box through the AUX input and would like to switch between the AUX and normal (CATV) input you should consider using the CHANNEL FIX feature discussed on page 23.

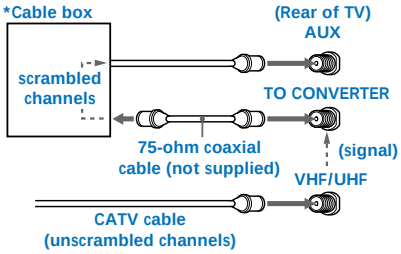

Notes

- Your Sony remote control can be programmed to operate your cable box. (see page 28)
- When using PIP, you cannot view the window picture with the AUX input.

VCR Connections

Connecting an antenna/cable TV system with a VCR

1 Attach the coaxial connector from your cable or antenna to IN on your VCR.

2 Using A/V connectors, connect AUDIO and VIDEO OUT on your VCR to AUDIO and VIDEO IN on your TV (Yellow-VIDEO, White-AUDIO Left, Red-AUDIO Right).*

3 Using a coaxial connector, connect OUT on your VCR to VHF/UHF on your TV.

* If you are connecting a monaural VCR, connect only the single white audio output to the left input on your TV.

Disconnect all power sources before making any connections.

VCR must be connected and turned on to operate PIP (KV-27S45, 27V45 only).

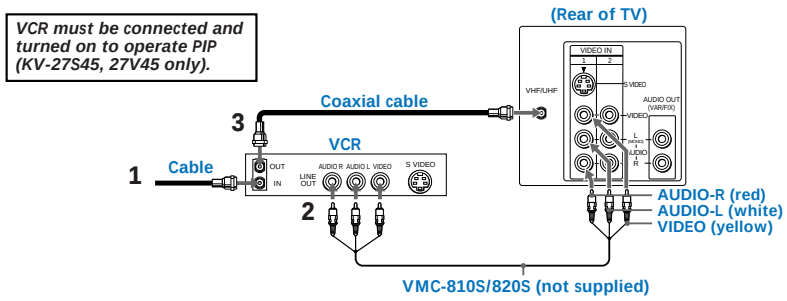

Connecting a VCR and TV with a cable box

You will need a splitter (not supplied) for the following connection.

1 Connect the single (input) jack of the splitter to your incoming cable connection. Connect the other two (output) jacks (using coaxial cable) to IN on your cable box and VHF/UHF on your TV.

2 Using a coaxial connector, connect OUT on your cable box to IN on your VCR.

3 Using A/V connectors, connect AUDIO and VIDEO OUT on your VCR to AUDIO and VIDEO IN on your TV (Yellow-VIDEO, White-AUDIO Left, Red-AUDIO Right).

For optimum picture quality, use S VIDEO instead of the yellow A/V cable. S Video does not provide sound, your audio connectors must still be connected.

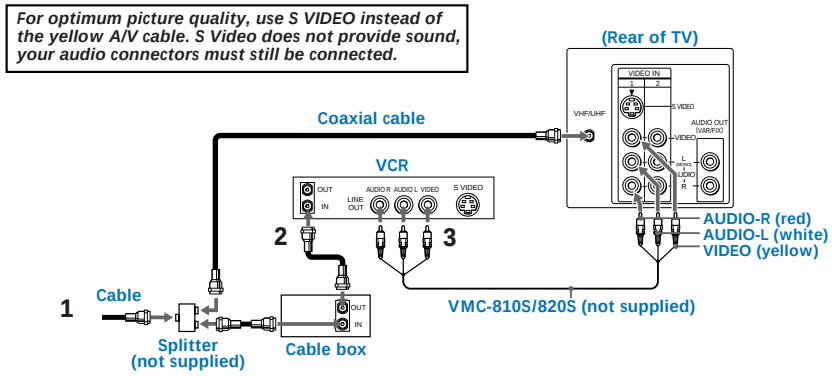

Connecting and Installing the TV (continued)

DBS Connections

Connecting a DBS (Direct Broadcast Satellite) receiver

1 Connect the cable from your satellite antenna to your DBS receiver.

2 Attach the coaxial connector from your cable or antenna to VHF/UHF on your TV.

3 Using A/V connectors, connect AUDIO and VIDEO OUT on your DBS receiver to AUDIO and VIDEO IN on your TV.

Disconnect all power sources before making any connections.

For optimum picture quality, use S VIDEO instead of the yellow A/V cable. S Video does not provide sound, your audio connectors must still be connected.

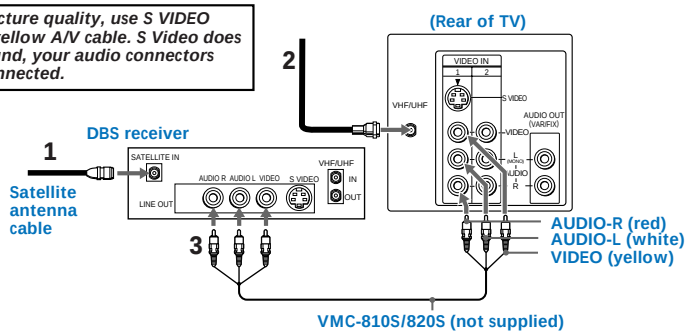

DBS Connections (continued)

Connecting a DBS (Direct Broadcast Satellite) receiver and a VCR

1 Connect the cable from your satellite antenna to your DBS receiver.

2 Attach the coaxial connector from your cable or antenna to VHF/UHF IN on your VCR.

3 Using a coaxial connector, connect VHF/UHF OUT on your VCR to VHF/UHF on your TV.

4 Using A/V connectors, connect AUDIO and VIDEO OUT on your DBS receiver to AUDIO and VIDEO IN on your VCR.

5 Using A/V connectors, connect AUDIO and VIDEO OUT on your VCR to AUDIO and VIDEO IN on your TV.

Note

- To view from the DBS or VCR, select the video input to which your DBS receiver or VCR is connected by pressing TV/VIDEO on the remote control.

Disconnect all power sources before making any connections.

For optimum picture quality, use S VIDEO instead of the yellow A/V cable. S Video does not provide sound, your audio connectors must still be connected.

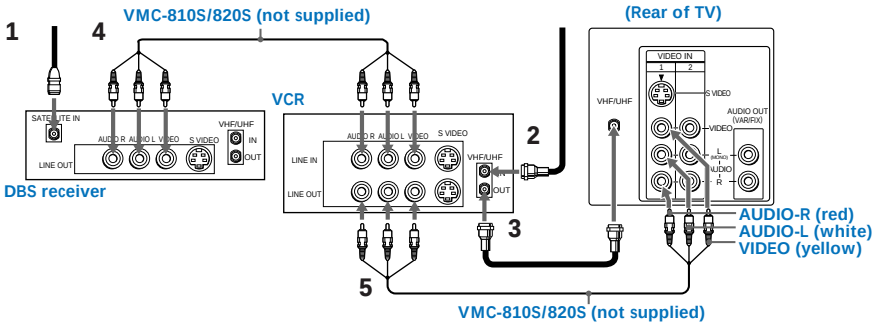

Connecting and Installing the TV (continued)

Additional Connections

The following connections are for accessories that will enhance your viewing options.

Connecting a DVD Player

1 Using A/V connectors, connect LINE OUT on your DVD to VIDEO IN on your TV (Red-AUDIO Right, White-AUDIO Left, Yellow-VIDEO).

Note

- For the best picture quality, connect the DVD player directly to the TV.

Connecting an audio system

For enhanced sound, connect your audio system to your TV.

1 Using AUDIO connectors, connect AUDIO OUT on your TV to one of the unused line inputs (e.g. TV, AUX, TAPE 2) on your stereo (White-AUDIO Left, Red-AUDIO Right).

2 Set your stereo to the chosen line input (e.g. TV, AUX, TAPE 2). Refer to page 20 of this manual for additional audio setup instructions.

Disconnect all power sources before making any connections.

For optimum picture quality, use S VIDEO instead of the yellow A/V cable. S Video does not provide sound, your audio connectors must still be connected.

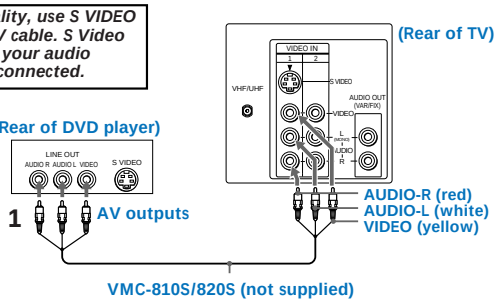

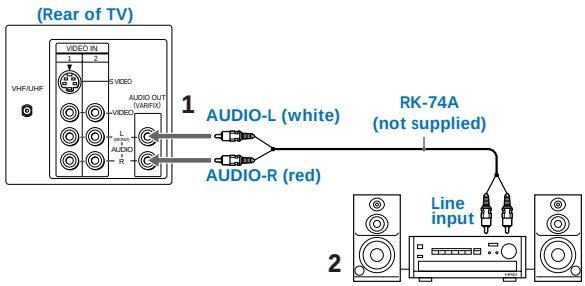

Connecting two VCRs for tape editing using MONITOR OUT

- **KV-27V40, 27V45, 27V65 only**

MONITOR OUT gives you the ability to use a second VCR to record a program being played by the primary VCR or to perform tape editing and dubbing.

1 Connect the VCR intended for playback using the setup instructions on page 7 of this manual.

2 Using A/V connectors, connect AUDIO and VIDEO IN on your VCR intended for recording to MONITOR AUDIO and VIDEO OUT on your TV.

Connecting a camcorder

This connection is convenient for viewing a picture directly from your camcorder.

Using A/V connectors, connect AUDIO and VIDEO OUT on your camcorder to AUDIO and VIDEO IN on your TV (Yellow-VIDEO, White-AUDIO Left, Red-AUDIO Right).

Connection can also be made directly to your A/V input located on the rear of your TV.

Note

- If you are connecting a monaural camcorder, connect only the single white audio output to the left input on your TV.

Disconnect all power sources before making any connections.

You cannot change video inputs while editing using MONITOR OUT.

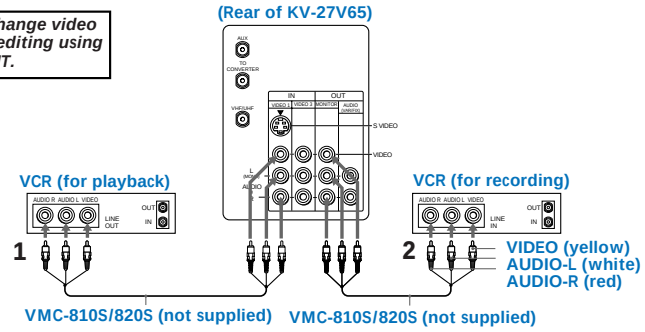

If you have an S Video equipped camcorder, you can use an S Video connection for optimum picture quality.

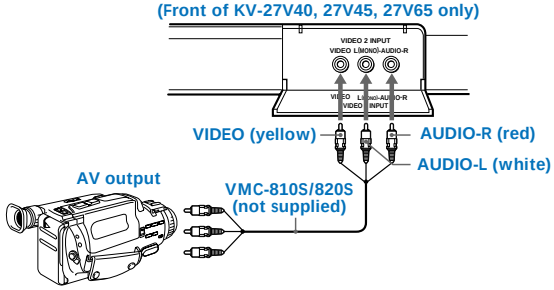

Basic Set up

Inserting batteries

Insert two size AA (R6) batteries (supplied) by matching the + and – on the batteries to the diagram inside the battery compartment.



Notes

- Remove the batteries to avoid damage from possible battery leakage whenever you anticipate that the remote control will not be used for an extended period.
- Handle the remote control with care. Avoid dropping it, getting it wet, or placing it in direct sunlight, near a heater, or where the humidity is high.
- Your remote control can be programmed to operate most video equipment. (see page 26)

Using the remote control, Move & Select buttons



The supplied remote control has "arrow" buttons (↑, ↓, ←, →) which allow for movement of the on-screen selector in four directions. Pressing on the outer buttons will cause the selector to *move* in the corresponding direction. Pressing the center button (⊕) will select the item.

Adjustments bars

When menu items present an adjustment bar (or), use the arrow buttons to change the setting.

On-Screen Help/Instructions

Several menu windows will provide prompts and instructions to assist you in navigating through the different functions. *When presented, use these to supplement the instructions in this manual.*

Note

- To reset your TV to factory settings, turn the TV on. Then, while pressing the RESET button, press the POWER key on your TV. The TV will turn itself off, then back on. (except KV-20V80).

Using your New TV

Setting up the TV automatically

The Easy Setup Guide allows you to set the on-screen language and set all receivable channels. The Easy Setup Guide screen appears every time you turn on the TV until you perform AUTO PROGRAM.

The Easy Setup Guide feature does not apply for installations that use a cable box for all channel selection.

To set up the TV manually, refer to "Using the SET UP menu" on page 23.

Tips

- Perform this function during the day, with the antenna and/or cable properly connected, to ensure that all available channels will be broadcasting and receivable.
- After using the Easy Setup Guide you will still have the option of adjusting any of the system settings, like skipping channels, through the SET UP menu (page 24).
- The TV must be set to the TV input to execute AUTO PROGRAM. Press ANT until a channel number appears.
- If your cable or antenna is connected to AUX, then press ANT until AUX appears next to the channel number. (KV-27S65, 27V65 only)

Using the buttons on the front of the TV:

For KV-27V65, the control buttons are located on the top of the TV.

1 Press POWER to turn on the TV.
The Easy Setup Guide screen appears.



2 (except Canadian models)
Press CH + to select English screens or CH – to select Spanish screens.



3 Press VOL + to continue or VOL – for a DEMO of functions and menus.



AUTO PROGRAM appears and the TV starts scanning and presetting channels automatically. When all the receivable channels are stored, the lowest numbered channel is displayed. If the TV receives cable TV channels, CABLE is set ON automatically.

To perform AUTO SET UP again

- Press SET UP on the TV.
- Press CH + or CH – to select a language.
- Press VOL + to restore factory settings (CONTINUE TO AUTO PROGRAM? will appear on the screen). Press CH + to continue or CH – to exit.
- Press SET UP to exit.

Note

- When you perform AUTO PROGRAM, your CHANNEL FIX, CHANNEL BLOCK and ON/OFF TIMER settings will be erased.

Using your New TV (continued)

Watching the TV

All of the TV features can be accessed via the remote control. The following chart will explain the function of the buttons found on your remote control.

REFER TO THE ILLUSTRATION OF THE REMOTE CONTROL ON THE INSIDE FRONT COVER OF THIS MANUAL AS YOU REVIEW THIS CHART

Using the White Labeled Buttons for TV Operations.	
FUNCTION VTR/DVD DBS/CABLE TV	Activate the remote control for use with the following components: TV, DBS/CABLE, VTR/DVD. Press when you want to control connected components with your remote control. (see pages 26-28 for instructions on programming your remote control)
POWER TV	Turns the TV on and off. If VIDEO appears on the screen, press TV/VIDEO or ANT until a channel number appears.
0 - 9	Use for direct channel selection. Press 0-9 to select a channel, the channel will change after 2 seconds, or you can press ENTER for immediate selection.
CH	Press to scan through the channels. *Keeping the CH + or – pressed allows you to rapidly scan to the desired channel.*
JUMP	Press to alternate or *jump* back and forth between two channels. You can jump between the last two channels selected with the 0-9 keys.
MUTING	Press to mute the sound (MUTING will appear on the screen). Press again or press VOL + to restore sound.

Using the White Labeled Buttons for TV Operations.	
FREEZE	Press to freeze the window picture while in PIP mode. If you are not in PIP mode, pressing FREEZE will cause the main picture to freeze into a window picture. *Great for copying down phone numbers, addresses, recipes, etc.*
SLEEP	Press repeatedly until the TV displays the approximate time in minutes (30, 60, or 90) that you want the TV to remain on before shutting off automatically. Cancel by pressing until SLEEP OFF appears.
DISPLAY	Press repeatedly to step through available displays: **Status** Channel number, current time, channel caption (if set) and Multi-Channel TV Sound (MTS) are displayed. *The MTS mode indication disappears after three seconds.* **CAPTION VISION** CAPTION VISION will be displayed on the screen if the broadcaster offers this service. (see right) To cancel the display, press DISPLAY repeatedly until DISPLAY OFF appears. *DISPLAY OFF disappears after three seconds.*
TV/VIDEO	Press repeatedly to step through available video inputs: **TV** and **VIDEO 1** (KV-27S40 only) **TV, VIDEO 1** and **VIDEO 2** (KV-20V80, 27S45, 27S65, 27V40 only) **TV, VIDEO 1, VIDEO 2** and **VIDEO 3** (KV-27V45, 27V65 only)
ANT *(AUX input)*	Press to change the VHF/UHF input to the AUX input (KV-27S65, 27V65 only). *For detailed connection information, see "Cable and antenna" or "Cable box and cable" on pages 5-6.*
TV/VTR +	Press when you are finished using a VCR and you want to switch to the TV input. Your VCR power will remain on.
MTS GUIDE	Press this button to cycle through the Multi-channel TV Sound (MTS) options. (see page 21). GUIDE is a feature of DBS, refer to your DBS operation instructions.

CAPTION VISION
(Closed Caption)



Some programs are broadcast with CAPTION VISION.

CC1, 2, 3 or 4
Shows you a printed version of the dialog or sound effects of a program. (The mode should be set to CC1 for most programs)

TEXT1, 2, 3 or 4
Shows you network/station information presented using either half or the whole screen. It is not usually related to the program.

XDS (Extended Data Service)
Shows a network name, program name, program length, and time of the show if the broadcaster offers this service.

Note

- Poor reception of TV programs can cause errors in CAPTION VISION and XDS. Captions may appear with a white box or other errors instead of intended text.

Watching two programs at one time - PIP

The Picture-in-Picture (PIP) feature allows you to view two channels simultaneously, one in the full size "main" picture and one in a smaller "window" picture. This means that two separate tuners must be available to provide the two signals.

Certain models (KV-27S45, 27V45 only) are equipped with a single tuner. This simply means that a VCR must be connected and turned on for PIP to operate.

Tip

To ensure a correct single tuner PIP connection (KV-27S45, 27V45 only), make sure the following list is complete before using PIP:

- A cable or antenna is connected to the VCR
- The VCR is connected to your TV
- The VCR is turned on

(for detailed connection information, see pages 5-7)

Note

- You must press TV (FUNCTION) before you can control PIP with the yellow labeled buttons.

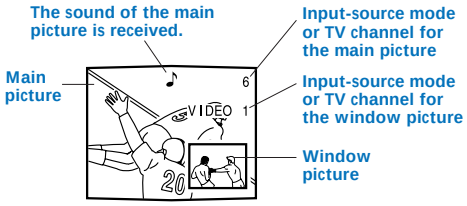
The sound of the main picture is received.
Input-source mode or TV channel for the main picture
Main picture
Input-source mode or TV channel for the window picture
VIDEO 1
Window picture

REFER TO THE ILLUSTRATION OF THE REMOTE CONTROL ON THE INSIDE FRONT COVER OF THIS MANUAL AS YOU REVIEW THIS CHART

Use the Yellow Labeled Buttons for PIP Operations.	
PIP ⏩	Press once to display the window picture (1/9 size). Press again to reduce the size of the window picture (1/16 size). Press a third time to remove the window picture.
TV/VIDEO ⏺	Press repeatedly to step through available video inputs: **TV, VIDEO 1, VIDEO 2, and VIDEO 3** (KV-27S45, 27S65, 27V45, 27V65 only) *If you have a single tuner, your PIP input source is the VCR.*
AUDIO ⏸	Press to alternate sound between the main picture and the window picture. A ♪ will appear for a few seconds to indicate which picture is receiving sound.

Use the Yellow Labeled Buttons for PIP Operations.	
TV/VTR + CH – ◯	Press to change the TV channel in the window picture. (KV-27S65, 27V65 only) For models KV-27S45, 27V45, you must press VTR/DVD (FUNCTION), then use the main CH +/- buttons to change channels. (see right)
POSITION ■	Press to move the location of the window picture (counterclockwise) around the main picture.
FREEZE ⏪	Press to freeze the window picture. Great for copying down phone numbers, addresses, recipes, etc. *Press FREEZE again to restore the previous screen(s).*
SWAP ⏩	Press to switch the audio and video of the main picture and the window picture. Each time you press SWAP, the picture and sound of the two will be *swapped.* *Any channels being received through the AUX jack cannot be displayed as a window picture. (KV-27S65, 27V65 only)*

Changing channels with a single tuner PIP

- **KV-27S45, 27V45 only**

1 Press TV/VIDEO until you reach the TV input.

2 Press PIP (the window picture appears).

To change the window picture:

1 Press VTR/DVD (FUNCTION).

2 Press the main CH +/– buttons to change channels.

To change the main picture:

1 Press TV (FUNCTION).

2 Press the main CH +/– buttons to change channels.

Note

- If you have the same program in both the window and the main picture and cannot change the channel in the window; press TV/VIDEO until you reach the TV input in the main picture.

Using your Menus

Learning menu selection

Use the MENU button to access a menu and use the select buttons (▲ or ▼) to alter settings. Use the following example, in which we activate the CABLE, to learn how to modify settings.

1 Press the MENU button.

The main menu appears.



2 Press ▲ or ▼ to highlight the desired menu (in this case SET UP) and press ⊕ to select it.



3 Press ▲ or ▼ to move to the desired option.



4 Press ⊕.

Options for your selection will be displayed.



5 Press ▲ or ▼ to make your selection and press ⊕.



When you are finished making changes to the selected menu, choose ↩MENU to return to the main menu.



Notes

- Pressing MENU on the remote control will allow you to exit from the menus at any time.
- If any menu items are "blacked out", press the ANT button on your remote control until a channel number appears.

Using the VIDEO menu



For detailed information on using the remote to modify menu settings, refer to "Learning menu selection" on page 18.

To select the VIDEO menu:



To restore the factory VIDEO settings

Press RESET while the VIDEO menu is displayed.

MODE *Customized picture viewing*	(except KV-20V80) **VIVID:** Select to receive a vivid, bright picture. **STANDARD:** Select to receive a standard picture. **MOVIE:** Select to receive a softened picture.
PICTURE *Picture Adjustment*	Adjust left to decrease picture contrast and soften the color. Adjust right to increase picture contrast and create more vivid color.
BRIGHTNESS *Picture Adjustment*	Adjust left to darken the picture. Adjust right to brighten the picture.
COLOR *Picture Adjustment*	Adjust left to decrease color intensity. Adjust right to increase color intensity.
HUE *Picture Adjustment*	Adjust left to decrease the green tones. Adjust right to increase the green tones.
SHARPNESS *Picture Adjustment*	Adjust left to soften the picture. Adjust right to sharpen the picture.

Using your Menus (continued)

♪ Using the AUDIO menu



For detailed information on using the remote to modify menu settings, refer to "Learning menu selection" on page 18.

To select the AUDIO ♪ menu:



To restore the factory AUDIO settings

Press RESET while the AUDIO menu is displayed.

Tip

Press ♪ for direct selection of an AUDIO setting.

TREBLE	Adjust left or right to decrease or increase higher pitched sound
BASS	Adjust left or right to decrease or increase low pitched sounds.
BALANCE	Adjust left or right to emphasize speaker volume.
AUTO VOLUME *Stabilizes volume*	(KV-27V40, 27V45, 27V65 only). **ON:** Select to stabilize the volume when changing channels. **OFF:** Select to turn AUTO VOLUME off.
SPEAKER *Custom selection of audio output source*	**ON:** Select to listen to the sound from the TV speakers and a separate stereo system. **OFF:** Select to turn off the TV speakers and listen to the TV's sound only through external audio system speakers.
AUDIO OUT *Use to control the TV's volume through a stereo*	AUDIO OUT can only be set when speakers are set to OFF. **VARIABLE:** Sound output varies according to the TV settings. *Useful when you want to use your remote control to control the output of a separate audio system.* **FIXED:** Sound output is held at a fixed level through your stereo.

OPTIONS *Enhanced audio options*	With the OPTIONS menu open: **1** Press ⊕ to access the feature you want to change. **2** Press ↑ or ↓ to cycle through the options. **MTS:** Press ↑ or ↓ to select one of the following options: **STEREO**: Select for stereo reception when viewing a broadcast in stereo. **SAP**: Select to listen to bilingual broadcast. (Non-SAP programs will be muted when this feature is selected.) **MONO**: Select for mono reception (use to reduce noise during stereo broadcasts.) ***Quick MTS access:*** *Press MTS on your remote control to cycle through the MTS options.* **EFFECT:** Press ↑ or ↓ to select one of these customized effects based on the program you are viewing: **SRS**: Produces a dynamic three dimensional sound for stereo audio signals. (KV-27V40, 27V45, 27V65 only) **SURROUND**: Simulates theater quality sound (only for stereo programs). (KV-20V80, 27S40, 27S45, 27S65 only) **SIMULATED**: Adds a surround-like effect to mono programs. (KV-27V40, 27V45, 27V65 only)



Using your Menus (continued)

Using the TIMER menu



For detailed information on using the remote to modify menu settings, refer to "Learning menu selection" on page 18.

To select the TIMER menu:



To cancel the ON/OFF TIMER function

Press RESET while the TIMER menu is displayed.

Tip

Set daylight saving time before setting the clock. Any loss of power will cause these settings to be erased.

DAYLIGHT SAVING *Automatically adjusts the time.*	**Spring:** Select YES to compensate for Daylight Saving Time. *The current time automatically moves one hour ahead.* **Fall:** Select NO at the end of Daylight Saving Time. *The current time moves back one hour.*
CURRENT TIME SET *Necessary for the TIMER.*	CURRENT TIME SET menu will appear. **1** Press ⊕. **2** Press ↑ or ↓ until the current day is displayed. Press ⊕ to select. **3** Press ↑ or ↓ until the current hour and AM/PM is displayed. Press ⊕ to select. **4** Press ↑ or ↓ until the current minute is displayed, press ⊕. The clock is set. Press MENU to exit. 
ON/OFF TIMER *Wake up or scheduled viewing.*	ON/OFF TIMER menu will appear. **1** Press ⊕. **2** Press ↑ or ↓ until the desired day or range of days is displayed. Press ⊕ to select. **3** Indicate the time that you want the TV to turn on by pressing ↑ or ↓ and then ⊕. **4** Set the time duration (maximum of 6 hours) by pressing ↑ or ↓ and then ⊕. **5** Press ↑ or ↓ until you reach the desired channel. Press ⊕ to select. The ON/OFF TIMER is now set. Press MENU to exit. *When you perform AUTO PROGRAM, all ON/OFF TIMER settings will be erased.* 

Using the SET UP menu



For detailed information on using the remote to modify menu settings, refer to "Learning menu selection" on page 18.

To select the SET UP menu:



Notes

- The FAVORITE CHANNEL feature is not available for the AUX input.
- Your remote control can be programmed to operate your cable box. (see page 28)

CHANNEL SET UP *Basic set up options for viewing*	With the CHANNEL SET UP menu open: **1** Use ↑ or ↓ to access the feature you want to change. **2** Press ⊕ to select the feature. **CABLE:** Select ON if your TV is connected to a cable system. (After setting CABLE, you will need to run AUTO PROGRAM.)  **CHANNEL FIX:** Press ⊕ and then use the ↑ or ↓ buttons to set the TV's input to one of the following options: **2-6:** When a cable box is connected to the VHF/UHF input. Press DBS/CABLE (FUNCTION) and then CH +/– to change channels. **AUX 2-6:** When a cable box is connected to AUX and a cable or antenna is connected to VHF/UHF. You can alternate between the two inputs by pressing ANT on the remote control. (KV-27S65, 27V65 only) **VIDEO 1:** When you have connected video equipment (e.g. A/V receiver) and you want the TV input fixed to it. You will be able to alternate between video sources using the A/V receiver. **OFF:** When you want to switch CHANNEL FIX off. Press ANT on the remote control until you reach a picture. *ON/OFF TIMER and CHANNEL BLOCK settings will be erased when CHANNEL FIX is set.* **AUTO PROGRAM:** Instructs the TV to automatically program all receivable channels. **CHANNEL SKIP/ADD:** With the CHANNEL SKIP/ADD window open: **1** Place the cursor next to SKIP or ADD. (only one option will be displayed) **2** Choose the desired channel using CH +/–, or by selecting with the 0-9 buttons and pressing ENTER. **3** Press ⊕ to activate. 

Using your Menus (continued)

Using the SET UP menu (continued)



For detailed information on using the remote to modify menu settings, refer to "Learning menu selection" on page 18.

To select the SET UP menu:



To erase the CHANNEL BLOCK settings

Press RESET while the SET UP menu is displayed.

CHANNEL SET UP (continued) *Basic set up options for viewing*	**CHANNEL CAPTION:** You will be able to label up to 12 channels with their call letters.(except KV-20V80) With the CHANNEL CAPTION menu open: **1** Press ⊕ and then ↑ or ↓ to access the desired channel, and press ⊕ again. **2** Press ↑ or ↓ to display the first letter or number of the caption and press ⊕ to select it. **3** Press ⊕ to activate. To erase a caption, press RESET. 
CHANNEL BLOCK *Prevent child access to certain channels.*	You will be able to block two channels. With the CHANNEL BLOCK window open: **1** Choose 1 or 2 and press ⊕. **2** Press ↑ or ↓ to display the channel you want to block. **3** Press ⊕ to activate. When you select the blocked channel, BLOCKED will appear on the screen. CAPTION VISION will also be blocked. *When you perform AUTO PROGRAM, your CHANNEL BLOCK settings will be erased.* 

FAVORITE CHANNEL *Quick access to favorite channels*	**Setting FAVORITE CHANNEL:** **1** Press ⊕ and then ↑ or ↓ to select AUTO or MANUAL. (Selecting AUTO will display the last five channels chosen with the remote control.) **2** Press ↑ or ↓ to move the cursor to 1, 2, 3, 4 or 5 and press ⊕. **3** Press ↑ or ↓ to access the desired channel and press ⊕ . **4** For KV-27S65, 27V65 only, you can preview your favorite channels in the window picture, to do so, set PREVIEW to ON. **Using FAVORITE CHANNEL:** **1** Press ⊕ when in normal viewing mode. Your FAVORITE CHANNEL options will appear. **2** Press ↑ or ↓ to access the channel you want to watch, and press ⊕. **3** For models KV-27S65, 27V65 only, if PREVIEW is ON, a window picture displays your favorite channels as you cycle through the options. 
VIDEO LABEL *Easy recognition of connected equipment (e.g. DBS, VHS, etc.)*	This feature allows you to label each input mode so that you can easily identify connected equipment (e.g. you can label VIDEO 1 as VHS). (except KV-20V80) With the VIDEO LABEL window open: **1** Press ↑ or ↓ to move to the input mode you want to label and press ⊕. **2** Press ↑ or ↓ to choose the label and press ⊕. **VIDEO LABEL** Options: Video 1: VHS, 8mm, BETA, LD, GAME, DBS, DVD, WEB, RECEIVER, DTV. Video 2/3: VHS, 8mm, BETA, LD, GAME, DBS, DVD, WEB, RECEIVER, DTV. *When VIDEO LABEL is set to WEB, the picture will darken, creating an ideal picture for WebTV viewing.* 
LANGUAGE	(except Canadian models) You can change the language of your menus to either ENGLISH or ESPAÑOL.

Operating video equipment

Programming the remote

You can use the supplied remote control to operate Sony or non-Sony video equipment.

1. Press CODE SET.
2. Press VTR/DVD (FUNCTION).
3. Use the 0-9 buttons to key in the manufacturer's code number from the following chart.
4. Press ENTER.

VCR manufacturer code numbers

Manufacturer	Code
Sony	301, 302, 303
Aiwa	338, 344
Broksonic	319, 317
Canon	309, 308
Daewoo	341, 312, 309
Emerson	319, 320, 316, 317, 318,341
Fisher	330, 335
Funai	338
General Electric	329, 304, 309
Go Video	322
Goldstar	332
Hitachi	306, 304, 305,338
JVC	314, 336, 337, 345, 346, 347
Kenwood	314, 336, 332, 337
LXI (Sears)	332, 305, 330, 335, 338
Magnavox	308, 309, 310
Mitsubishi/MGA	323, 324, 325, 326
NEC	314, 336, 337
Panasonic	308, 309, 306, 307
Philips	308, 309, 310
Pioneer	308
Quasar	308, 309, 306
RCA/PROSCAN	304, 305, 308, 309, 311, 312, 313, 310, 329
Realistic	309, 330, 328, 335, 324, 338
Sansui	314
Samsung	322, 313, 321
Sanyo	330, 335
Sharp	327, 328
Sylvania	308, 309, 338, 310
Symphonic	338
Technics	309, 308
Toshiba	312, 311
Wards	327, 328, 335, 331, 332
Zenith	331

Operating a VCR	Buttons on the remote control
To turn on or off	Press VTR (POWER).
To select a channel directly	Press the 0 – 9 buttons.
To change channels	Press CH +/–.
To record	Press ► and ● simultaneously.
To play	Press ►.
To stop	Press ■.
To fast forward	Press ►►.
To rewind the tape	Press ◄◄.
To pause	Press ❚❚. To resume normal playback, press again or press ►.
To search the picture forward or backward	Press ►► or ◄◄ during playback. To resume normal playback, release the button.
To change input mode	Press TV/VTR.

Tips

- In some rare cases, you may not be able to operate your non-Sony video equipment with the supplied remote control. In this case, please use the equipment's own remote control.
- The code numbers for Sony VCR's are assigned at the factory as follows:

VHS VCR	301 (preset code for the supplied remote control)
8 mm VCR	302
Beta, ED Beta VCRs	303

- When you remove the batteries, the code number may revert to the factory setting.

MDP (Multi Disc Player) manufacturer code numbers

Manufacturer	Code
Sony	701
Panasonic	704, 710
Pioneer	702

Operating an MDP	Buttons on the remote control
To turn on or off	Press VTR/DVD (POWER).
To play	Press ►.
To stop	Press ■.
To pause	Press ❚❚. To resume normal playback, press again or press ►.
To search the picture forward or backward	Press ►► or ◄◄ during playback. To resume normal playback, press ►.
To search the chapter forward or backward	Press CH +/–.

DVD (Digital Versatile Disc) manufacturer code numbers

Manufacturer	Code
Sony	751
Panasonic	753
Pioneer	752
RCA	755
Toshiba	754

Operating a DVD player	Buttons on the remote control
To turn on or off	Press VTR/DVD (POWER).
To play	Press ►.
To stop	Press ■.
To pause	Press ❚❚. To resume normal playback, press again or press ►.
To search the picture forward or backward	Press ►► or ◄◄ during playback. To resume normal playback, press ►.
To search the chapter forward or backward	Press CH +/–.
To select chapters directly	0–9 + ENTER.
MENU	Press to display DVD menu.
To move cursor in menu	Use your arrow buttons ↑↓, ←→.

Operating a cable box or DBS receiver

Programming the remote

You can program the supplied remote control to operate a cable box or DBS receiver.

1 Press CODE SET.

2 Press DBS/CABLE (FUNCTION).

3 Use the 0-9 buttons to key in the manufacturer's code number from the following chart.

4 Press ENTER.

For more details on operating the cable box or DBS receiver

Refer to the operating instructions that were supplied with the equipment.

If the remote control doesn't work

- First, try repeating the setup procedures using the other codes listed for your equipment.

Tips

- If more than one code number is listed, try entering them one by one until you come to the correct code for your equipment.
- If you enter a new code number, the code number you previously entered at that setting is erased.
- In some rare cases, you may not be able to operate your equipment with the supplied remote control. In this case, use the equipment's own remote control unit.
- Whenever you remove the batteries the code numbers may revert to the factory setting and must be reset.

Manufacturer code numbers (cable box)

Manufacturer	Code
Hamlin/Regal	222, 223, 224, 225, 226
Jerrold/G. I.	201, 202, 203, 204, 205, 206, 207, 208, 218
Oak	227, 228, 229
Panasonic	219, 220, 221
Pioneer	214, 215
Scientific Atlanta	209, 210, 211
Tocom	216, 217
Zenith	212, 213

Manufacturer code numbers (DBS receiver)

Manufacturer	Code
Sony	801 (preset code for remote control)
General Electric	802
Hitachi	805
Hughes	804
Panasonic	803
RCA/PROSCAN	802, 808
Toshiba	806, 807

Troubleshooting

Consult the table below; it suggests solutions to specific problems. If you need more information, consult the operating instructions guide.

Problem	What it could be	What you can do
Cannot Operate Single Tuner PIP (KV-27S45, 27V45)	• VCR may not be connected to your TV properly. • VCR may not be turned on.	• Ensure that you have set your VCR correctly. (see page 7)
A red light keeps flashing on the TV for more than a few seconds	• Your TV may need service.	• Call your local Sony service center.
TV makes a noise when turned on	• This is a normal function of your TV.	
Screen is not lit and there is no sound	• Power cord may not be plugged in. • Batteries may not have been placed with the correct polarity. • TV/VIDEO setting may be incorrect.	• Press TV/VIDEO until you receive a channel. • Perform AUTO SET UP again by pressing the SET UP button on your TV. (see page 13)
Poor or no picture (screen lit), good sound	• VIDEO menu settings may not be adjusted correctly. • Antenna/cable connections may be faulty. • VIDEO LABEL inputs may be set to WEB. (This label darkens the screen for ideal WebTV viewing.)	• Readjust your VIDEO menu settings.(see page 19) • Check your VIDEO LABEL settings. (see page 25)
Good picture, no sound	• Sound may be set to MUTE. • Your TV may be set to SAP. • Speaker may not be set correctly.	• Check the MTS setting in the AUDIO menu. (see page 21) • Check your SPEAKER settings. (see page 20)
No color	• Color settings may not be adjusted correctly.	• Adjust the COLOR settings in the VIDEO menu. (see page 19)

Troubleshooting (continued)

Problem	What it could be	What you can do
Only snow and noise appear on the screen	• CABLE setting may not be set correctly in the SET UP menu. • Antenna/cable connections may not be correct. • TV may be set to AUX mode.	• Ensure that you have selected the correct CABLE mode in the SET UP menu. (see page 23) • Press ANT on your remote control to change the input mode. (see page 15)
Cannot receive upper channels (UHF) when using an antenna	• CABLE setting may not be correct in the SET UP menu.	• Ensure that CABLE is set to OFF in the SET UP menu. (see page 23) • Use AUTO PROGRAM to add receivable channels that are not presently in TV memory. (see page 24)
Cannot receive any channels when using cable	• CABLE setting may not be set correctly in the SET UP menu.	• Ensure that CABLE is set to ON in the SET UP menu. (see page 23) • Use AUTO PROGRAM to add receivable channels that are not presently in TV memory. (see page 24)
Cannot gain enough volume when using a cable box	• Volume may not be adjusted on your cable box.	• Press TV (FUNCTION) and adjust the TV's volume.
TV is fixed to one channel	• CHANNEL FIX settings may not be correct.	• Check your CHANNEL FIX settings. (see page 23)

If, after reading these operating instructions, you have additional questions related to the use of your Sony television, please call our Direct Response Center at 1-800-222-SONY (7669).

SECTION 2
DISASSEMBLY

2-1. REAR COVER REMOVAL

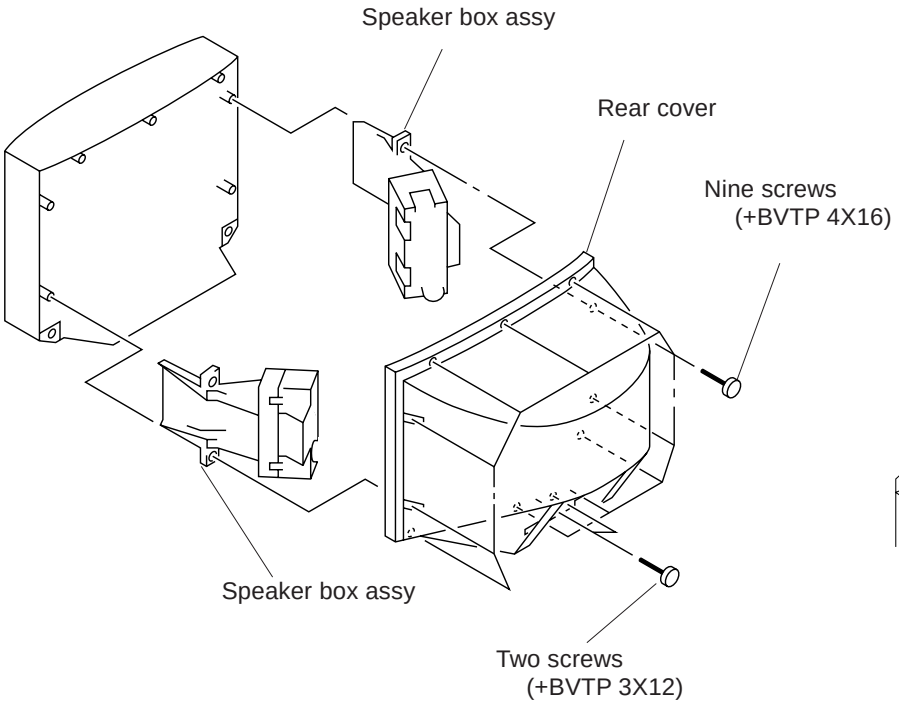

2-2. CONTROL SWITCH REMOVAL

(KV-27V65/29VL65A/29VL65C/29VL95 ONLY)

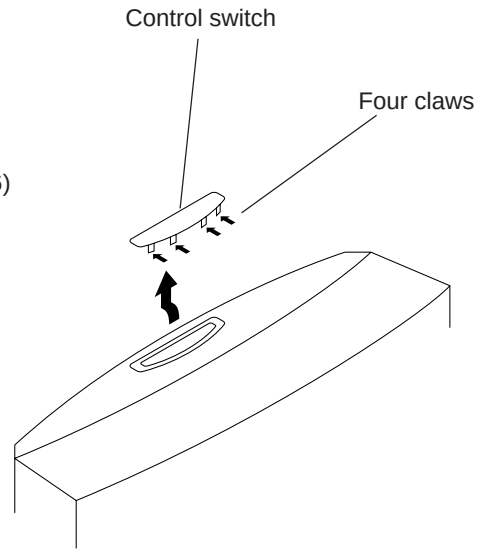

2-3. CHASSIS ASSEMBLY REMOVAL

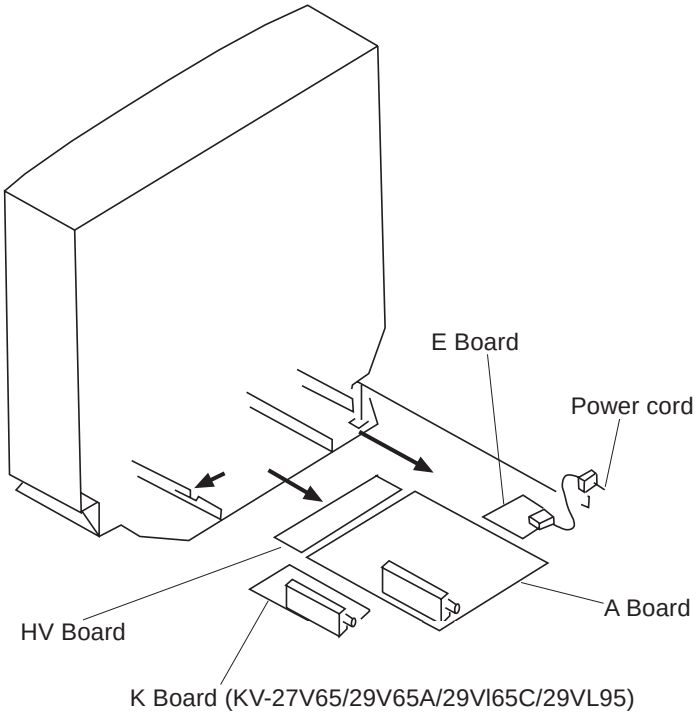

2-4. SERVICE POSITION

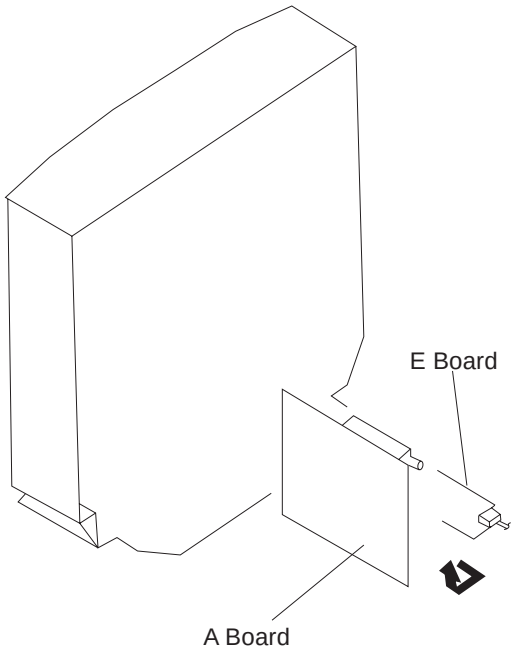

2-5. PICTURE TUBE REMOVAL

WARNING: BEFORE REMOVING ANODE CAP

H.V. remains in the CRT even after the power is disconnected. Discharge CRT before attempting to remove the anode cap to avoid electrical shock. Short between anode and CRT coating earth ground strap.

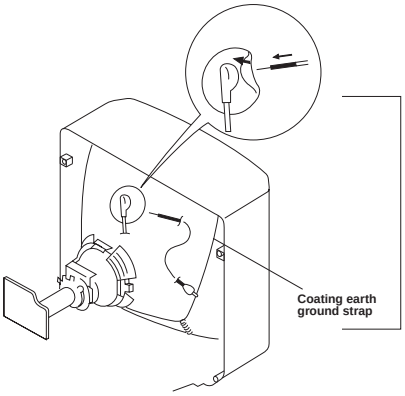

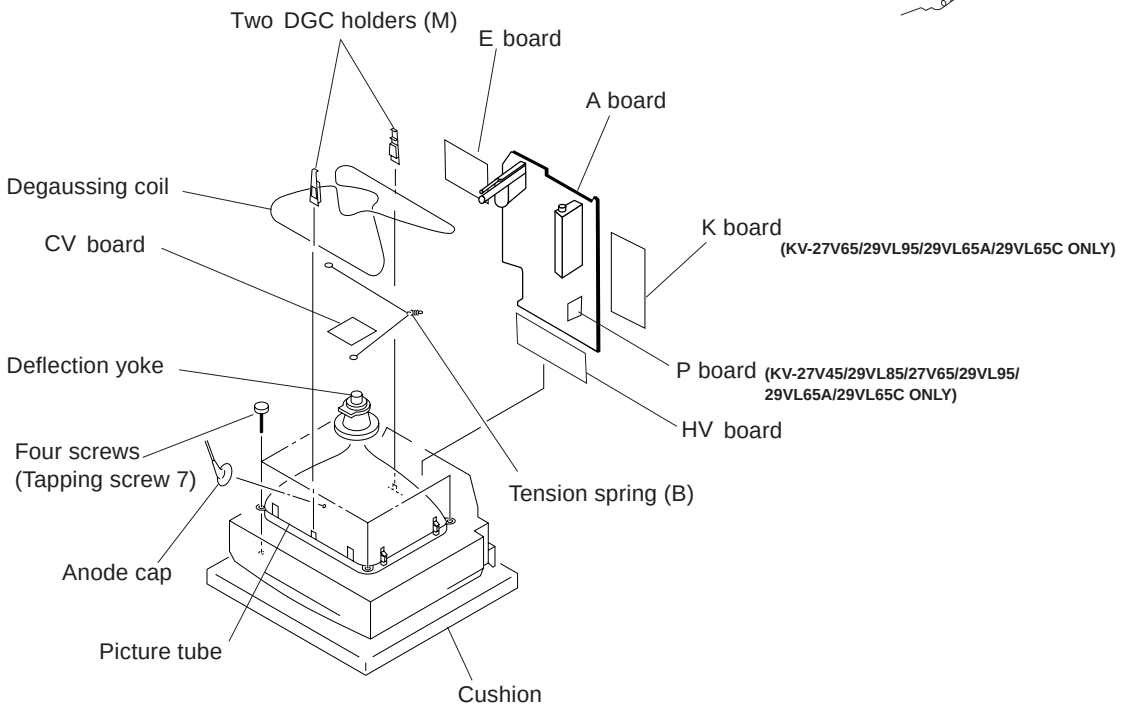

ANODE-CAP REMOVAL

NOTE: Short circuit the anode of the picture tube and the anode cap to the metal chassis, CRT shield or carbon painted on the CRT, after removing the anode.

REMOVAL PROCEDURES

① Turn up one side of the rubber cap in the direction indicated by arrow ⓐ.



② Use your thumb to pull the rubber cap firmly in the direction indicated by arrow ⓑ.



③ When one side of the rubber cap separates from the anode button, the anode-cap can be removed by turning the rubber cap and pulling it in the direction of arrow ⓒ.

HOW TO HANDLE AN ANODE-CAP

① Do not use sharp objects which may cause damage to the surface of the anode-cap.
② Do not squeeze the rubber covering too hard to avoid damaging the anode-cap. A material fitting called a shatter-hook terminal is built into the rubber.
③ Do not force turn the foot of the rubber cover. This may cause the shatter-hook terminal to protrude and damage the rubber.





SECTION 3
SET-UP ADJUSTMENTS

The following adjustments should be made when a complete realignment is required or a new picture tube is installed. These adjustments should be performed with rated power supply voltage unless otherwise noted.

The controls and switch should be set as follows unless otherwise noted:

PICTURE control ..... normal

BRIGHTNESS control ..... normal

Perform the adjustments in order as follows:

1. Beam Landing
2. Convergence
3. Focus
4. Screen (G2) and White Balance

Note: Test Equipment Required

1. Color Bar Pattern Generator
2. Degausser
3. DC Power Supply
4. Digital Multimeter

3-1. BEAM LANDING

Preparation:

- Feed in the white pattern signal.
- Before starting, degauss the entire screen.

1. Input a raster signal with the pattern generator.
2. Loosen the deflection yoke mounting screw, and set the purity control to the center as shown in Fig.2.
3. Turn the raster signal of the pattern generator to green.
4. Move the deflection yoke backward, and adjust with the purity control so that green is in the center and red and blue are at the sides evenly. (Fig.3)
5. Move the deflection yoke forward, and adjust so that the entire screen becomes green. (Fig.1)
6. Switch over the raster signal to red and blue and confirm the condition.
7. When the position of the deflection yoke is determined, tighten it with the deflection yoke mounting screw.
8. When landing at the corner is not right, adjust by using the disk magnets. (Fig.4)

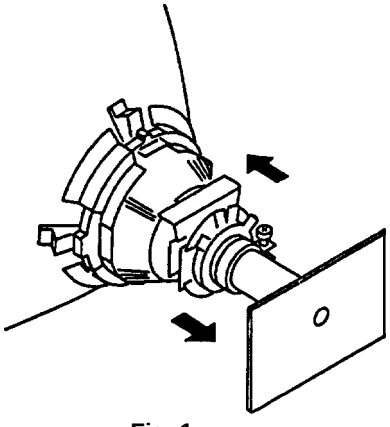

Fig. 1



Fig. 2



Fig. 3

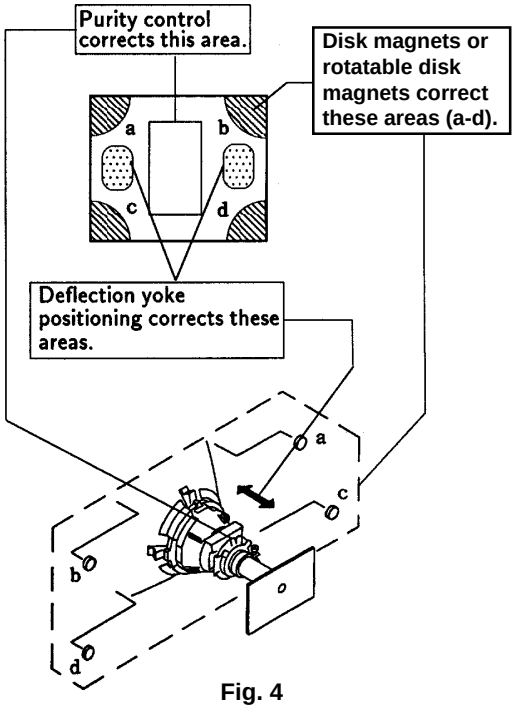

Fig. 4

3-2. CONVERGENCE

Preparation:

- Before starting, perform FOCUS, V. LIN and V. SIZE adjustments.
- Set BRIGHTNESS control to minimum.
- Feed in dot pattern.

(1) Vertical Static Convergence

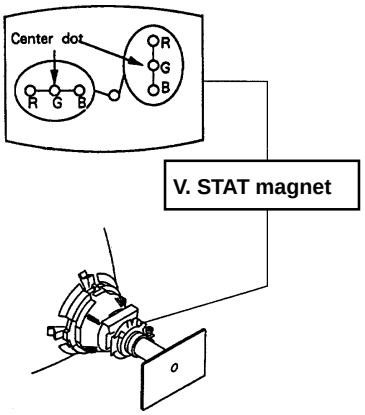

Fig. 5

1. Adjust V. STAT magnet to converge red, green and blue dots in the center of the screen. (Vertical movement)

   Tilt the V. STAT magnet and adjust static convergence to open or close the V. STAT magnet.



2. When the V. STAT magnet is moved in the direction of arrow ⓐ and ⓑ, red, green, and blue dots move as shown below:

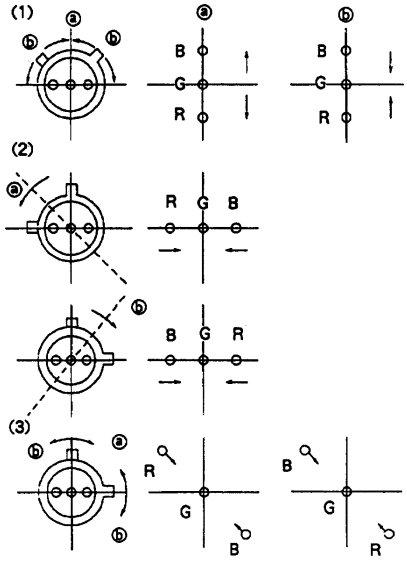

If the blue dot does not converge with red and green dots, perform the following steps:

- Move BMC magnet (a) to correct insufficient H. Static convergence.
- Rotate BMC magnet (b) to correct insufficient V. Static convergence.

In either case, repeat Beam Landing Adjustment.

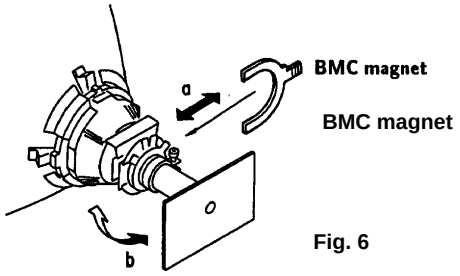

Fig. 6

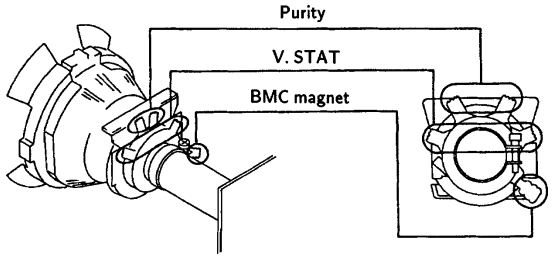

Fig. 7

(2) Dynamic Convergence Adjustment

Preparation:

- Before starting, perform Horizontal and Vertical Static Convergence Adjustment.

1. Slightly loosen deflection yoke screw.
2. Remove deflection yoke spacers.
3. Move the deflection yoke for best convergence as shown below. (Fig. 8)
4. Tighten the deflection yoke screw.
5. Install the deflection yoke spacers.

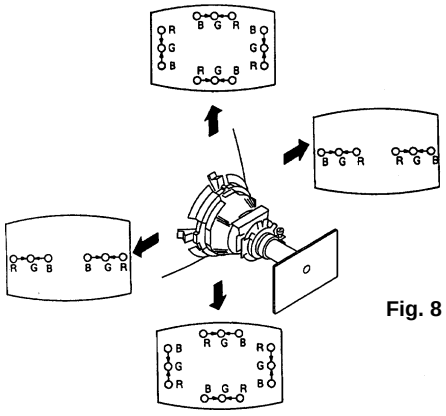

Fig. 8

(3) Screen-corner Convergence



Fig. 9

Affix a permalloy assembly corresponding to the misconverged areas:



3-3. FOCUS

1. Adjust FOCUS control for best picture.



Fig. 10

3-4. SCREEN (G2)

1. Input a dots pattern.
2. Set the PICTURE and BRIGHT controls at minimum and COLOR control at normal.
3. Adjust SBRT, GCUT, BCUT in service mode with an oscilloscope as shown in Fig. 11 so that voltages on the red, green, and blue cathodes are 170Vdc.

Fig. 11



4. Observe the screen and adjust SCREEN (G2) VR to obtain the faintly visible background of dot signal.

3-5. METHOD OF SETTING THE SERVICE ADJUSTMENT MODE

(1) SERVICE MODE PROCEDURE

1. Standby mode. (Power off)
2. DISPLAY → 5 → VOL (+) → POWER on the Remote Commander. (Press each button within a second.)

(2) SERVICE ADJUSTMENT MODE IN



3. The CRT displays the item being adjusted.
4. Press 1 or 4 on the Remote Commander to select the item.
5. Press 3 or 6 on the Remote Commander to change the data.
6. Press MUTING then ENTER to write into memory.

(3) SERVICE ADJUSTMENT MODE MEMORY



MUTING Green
↓
ENTER Red

7. Turn set off and on to exit.

3-6. WHITE BALANCE ADJUSTMENTS

1. Input an entire white signal.
2. Set to Service adjustment Mode.
3. Set DCOL to "0"
4. Set the PICTURE and BRIGHT to minimum.
5. Adjust with SBRT if necessary.
6. Select GCUT and BCUT with 1 and 4 .
7. Adjust with 3 and 6 for the best white balance.
8. Set the PICTURE and BRIGHT to maximum.
9. Select GDRV and BDRV with 1 and 4 .
10. Adjust with 3 and 6 for the best white balance.
11. Reset DCOL to "1".
12. Write into the memory by pressing MUTING then ENTER .

SECTION 4
SAFETY RELATED ADJUSTMENTS

A BOARD

⋈ R584 CONFIRMATION METHOD (HV HOLD-DOWN CONFIRMATION) AND READJUSTMENTS

The following adjustments should always be performed when replacing the following components which are marked with ◪ on the schematic diagram:

IC301,IC521,IC603, DY, D573, D574 C505, C507, C508, C509, C511, C515, C520, C572, C573, C574, C575, L591, L501, R582, R583, R585, R586, R578, R579, T504 (FBT)

1. Preparation before Confirmation

Using Variac, apply AC input voltage: 120±2VAC
(or 220 ± 2 VAC for KV-29VL65A/29VL65C ONLY)

1) Turn the POWER switch ON.
2) Input a white signal and set the PICTURE and BRIGHT controls to maximum.
3) Confirm that the voltage between C574 (+) or TP503 and ground is more than: 105VDC.

2. Hold-down Operation Confirmation

1) Connect the current meter between Pin 11 of the FBT (T504) and the PCB land where Pin 11 would normally attach. (see figure 1.0 on next page)
2) Input a dot signal and set PICTURE and BRIGHTNESS to minimum: IABL = 100±100µA
3) Confirm the voltage of A board TP-600 is 135 ± 3VDC
4) Connect the Digital Voltmeter and the DC power supply via diode 1SS119 to C574 (+). (See figure 1.0 on next page.)
5) Increase the DC power voltage gradually until the picture blanks out.
6) Turn DC power source off immediately.
7) Read the digital voltmeter indication.

   STANDARD
   Less than or equal to: 141.3 VDC

8) Input a white signal and set PICTURE and BRIGHTNESS to maximum: IABL = 1750±100µA
9) Repeat steps from (4) to (7).

   STANDARD
   Less than or equal to: 141.3 VDC

3. Hold-down Readjustment

If the current setting indicated in step 2-2 cannot be met, readjustment should be performed by altering the resistance value of R584, a component marked with ⋈.

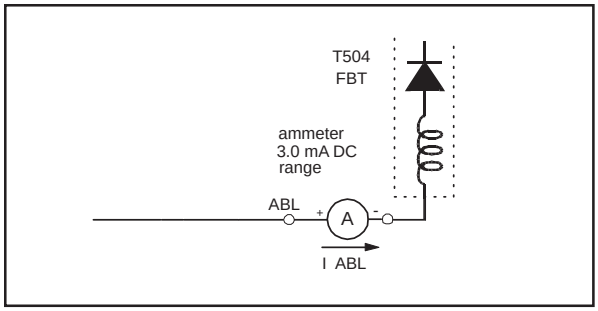

B+ VOLTAGE CONFIRMATION AND ADJUSTMENT

The following adjustments should always be performed when replacing the following components which are marked with ◪ on the schematic diagram:

IC603, IC601, R699

1) Using Variac, apply AC input voltage: 130 ± 2.0 VAC (or 220.0 ± 2.0 VAC for KV-29VL65A/29VL65C only).
2) Input a dot signal.
3) Set the PICTURE control and the BRIGHT control to minimum.
4) Set to service adjustment mode.
5) Select PADJ with [1] and [4] .
6) Adjust with [6] to the 0 level.
7) Confirm the voltage of A BOARD TP-600 is less than 138 VDC.
8) If step 7 is not satisfied, replace the components, repeat the above steps.
9) Adjust with [3] and [6] for: 135 ± 3 VDC
10) Write into the memory by pressing [MUTING] then [ENTER].

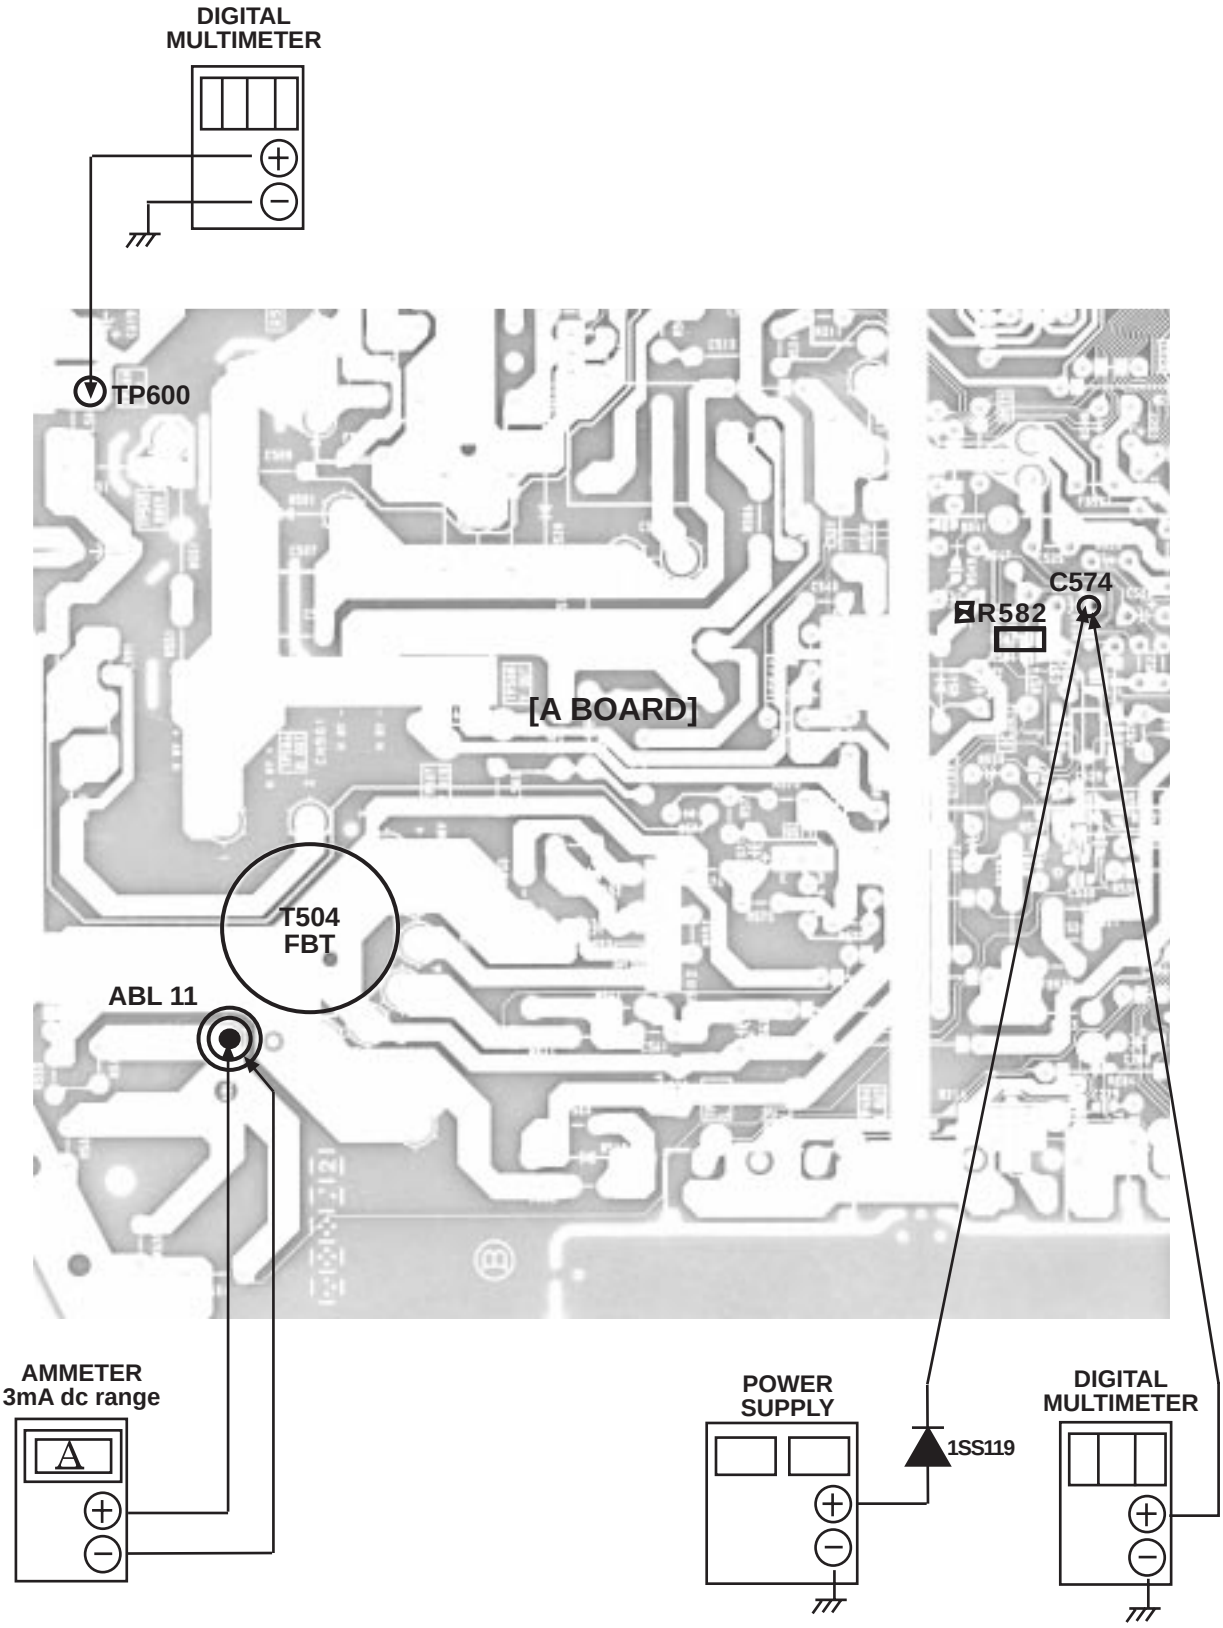
DIGITAL
MULTIMETER
TP600
[A BOARD]
C574
R582
T504
FBT
ABL 11
AMMETER
3mA dc range
A
POWER
SUPPLY
1SS119
DIGITAL
MULTIMETER

Figure 1.0

SECTION 5
CIRCUIT ADJUSTMENTS

5-1. ELECTRICAL ADJUSTMENT BY REMOTE COMMANDER

Use Remote Commander (RM-Y167) to perform circuit adjustments on this model.

NOTE : Test Equipment Required:
1. Pattern Generator
2. Frequency Counter
3. Digital Multimeter
4. Audio OSC

(1) Method of Setting the Service Adjustment Mode

SERVICE MODE PROCEDURE

1. Standby mode. (Power off)
2. DISPLAY → 5 → VOL (+) → POWER on the Remote Commander. (Press each button within a second.)

SERVICE ADJUSTMENT MODE IN



3. The CRT displays the item being adjusted.
4. Press 1 or 4 on the Remote Commander to select the item.
5. Press 3 or 6 on the Remote Commander to change the data.
6. Press MUTING then ENTER to write into memory.

SERVICE ADJUSTMENT MODE MEMORY

MUTING Green
↓
ENTER Red

7. Press 8 then ENTER on the Remote Commander to initialize.



Carry out step 7 when adjusting IDs 0 to 4 and when replacing and adjusting IC003.

8. Turn set off and on to exit.

(2) Memory Write Confirmation Method

1. After adjustment, pull out the plug from the AC outlet, then replace the plug in the AC outlet again.
2. Turn the power switch ON and set to service mode.
3. Call the adjusted items again to confirm they were adjusted.

(3) Adjust Buttons and Indicator

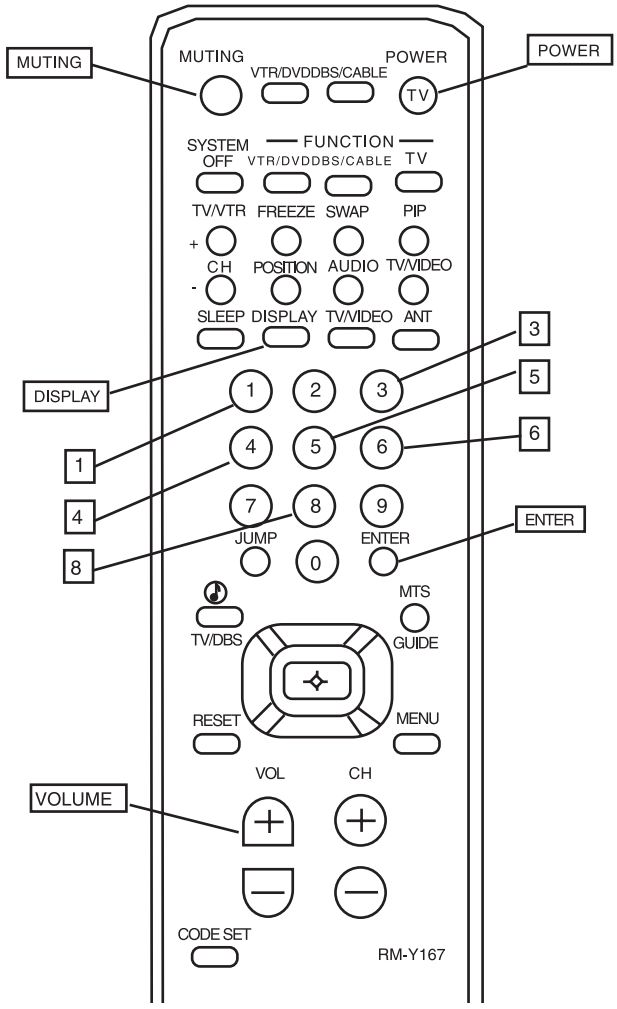

RM-Y167

(4) Item of Adjustments

NO.	ITEM	FUNCTION	DATA RANGE	INITIAL DATA				AVERAGE DATA
				NTSC	PAL-M	PAL-N	VIDEO	
1	HSIZ	HORIZONTAL AMP. ADJ.	0-63	45	45	45		48
2	HPOS	HORIZONTAL POS. ADJ.	0-63	10	10	10		10
3	VBOW	VRT LINE BOWING ADJ.	0-15	6				6
4	VANG	VRT LINE BOW SLANT ADJ.	0-15	5				5
5	TRAP	HORIZ. TRAPEZOID ADJ.	0-15	7				5
6	PAMP	HORIZ. PIN DISTORTION ADJ.	0-63	20	20	20		30
7	CPIN	SAME AS PAMP-SCRN TP/BTM	0-63	40	40	40		30
8	VSIZ	VERTICAL AMP. ADJUST	0-63	31	31	38		35
9	VPOS	VERTICAL POSITION ADJ.	0-63	35	35	35		35
10	VLIN	VERTICAL LINEARITYADJ.	0-15	6	6	6		6
11	SCOR	VERTICAL AMOUNT ADJ.	0-15	8	8	8		8
12	VZOM	16:9 CRT Z MODE ON/OFF	0,1	0				0
13	EHT	VRT HI-VOLT. CORRECTION	0-15	4				4
14	ASP	ASPECT RATIO CONTROL	0-63	47				47
15	SCRL	16:9 CRT Z MODE TRAN SCRL	0-63	31				31
16	HBLK	RGB OUT WIDTH CONTROL	0,1	1				1
17	LBLK	LEFT SCREEN HBLK CONTROL	0-15	15				15
18	RBLK	RGT SCREEN HBLK CONTROL	0-15	3				3
19	VUSN	V SAW WAVEFORM COMPRES	0,1	0				0
20	HDW	H. DRIVE PULSE WIDTH	0,1	0				0
21	EWDC	EW/DC ADJUST	0,1	0				0
22	LVLN	SCREEN BTM VRT LIN ADJUST	0-15	0				0
23	UVLN	SCREEN TOP VRT LIN ADJUST	0-15	0				0
24	RDRV	R OUTPUT DRIVE CONTROL	0-63	35				40
25	GDRV	G OUTPUT DRIVE CONTROL	0-63	30				35
26	BDRV	B OUTPUT DRIVE CONTROL	0-63	30				35
27	RCUT	R OUTPUT CUTOFF CONTROL	0-15	10				7
28	GCUT	G OUTPUT CUTOFF CONTROL	0-15	7				5
29	BCUT	B OUTPUT CUTOFF CONTROL	0-15	7				5
30	DCOL	DYNAMIC COLOR ON/OFF	0,1	0				1
31	SHUE	SUB HUE	0-31	14				8
32	SCOL	SUB COLOR	0-31	14	14	14		14
33	SBRT	SUB BRIGHTNESS	0-31	11				12
34	RON	R OUTPUT ON/OFF	0,1	1				1
35	GON	G OUTPUT ON/OFF	0,1	1				1
36	BON	B OUTPUT ON/OFF	0,1	1				1
37	AXPL	AXIS PAL	0,1	0				0
38	AXNT	AXIS NTSC	0,1	0				0
39	CBPF	CHROMA BPF ON/OFF	0,1	0*, 1**				
40	CTRP	Y TRAP FILTER ON/OFF	0,1	1*, 0**				
41	COFF	COLOR ON/OFF	0,1	0				0
42	KOFF	SET COLOR KILLER	0,1	0				0
43	SSHP	SUB SHARPNESS	0-15	6				6
44	SHPF	SHARPNESS CIRCUIT F0	0,1	1			1	1
45	PREL	PRE/OVR SHOOT SWITCHING	0,1	1				1
46	Y-DC	DC TRANS RATIO SWITCHING	0,1	1				1
47	GAMM	GAMMA CORRECTION AMNT	0-3	0				0
48	ABLM	ABL MODE SWITCHING	0,1	1				1
49	VTH	ABL C D VTH SWITCHING	0,1	1				1
50	YDEL	Y DELAY TIME CONTROL	0-15	7				7
51	NCOL	NO COLOR ID	0,1	1				1
52	FSC	FSC OUT ON/OFF	0,1	1*, 0**				
53	K-ID	KILLER ID CONTROL SW	0,1	0				0
54	HOSC	H VCO OSCILLATION FREQ	0-15	7				7
55	VSS	V SYNC SLICE LEVEL	0,1	0				0
56	HSS	H SYNC SLICE LEVEL	0,1	0				0
57	HMSK		0,1	1				1
58	VTMS	SELECT SIGNAL VTIM PIN	0-3	0				0
59	CDMD	V CNT DWN MODE SWITCHING	0-3	0			1	
60	AFC	AFC LOOP GAIN SWITCHING	0-3	0			0	

NO.	ITEM	FUNCTION	DATA RANGE	INITIAL DATA				AVERAGE DATA
				NTSC	PAL-M	PAL-N	VIDEO	
61	FIFR	FIELD FREQUENCY	0-3	3*, 1**				
62	SBAL	SUB BALANCE	0-31	14				14
63	DISP	OSD POSITION	0-127	15				15
64	PADJ	POWER ADJUSTMENT	0-63	3				3
65	PSHP	PIP SUB SHARPNESS	0-15	7				7
66	PPIX	PIP SUB CONTRAST	0-15	7				7
67	PHUE	PIP SUB HUE	0-15	3				3
68	PCOL	PIP SUB COLOR	0-15	5	5	5		5
69	PTRP	PIP C TRAP F0	0-15	7				7
70	PAFC	PiP AFC	0-3	1			1	1
71	PYDR	PIP Y DRIVE	0-31	14				14
72	UPED	U PED	0-15	8				8
73	VPED	V PED	0-15	8				8
74	U2PE	U2 PED	0-15	5				5
75	V2PE	V2 PED	0-15	5				5
76	Y2DR	Y2 DRIVE	0-31	20				20
77	U2DR	U2 DRIVE	0-31	18				18
78	V2DR	V2 DRIVE	0-31	9				9
79	PSFO	PIP SHP F0	0,1	1				1
80	PCD2	PIP CD MODE 2	0,1	1			1	1
81	PDCT	PIP DC TRAN	0-7	4				4
82	PP/O	PIP PRE/OVER	0-3	1				1
83	PDLY	PIP Y DELAY	0-3	0				0
84	PBG	PIP BG	0-15	5				5
85	PEXT	PIP EXT COLOR	0,1	1*, 0**				1** 0*
86	PHMK		0,1	0				0
87	ABL0		0,1	0				0
88	ABL1		0-7	1				1
89	PHPO	PIP HORIZONTAL POSITION	0-63	58				58
90	PVPO	PiP VERTICAL POSiTiON	0-31	18				18
91	PYSD	PIP YS DELAY	0-15	1				1
92	PYDL	PIP Y INPUT DELAY	0-7	0				0
93	PHVI	PIP HV SYNC	0,1	0				0
94	PCLP	PIP CLAMP	0-3	0				0
95	PCLK	PIP CLOCK	0,1	1				1
96	PIHS	INSET HORIZONTAL SYNC	0-15	2				2
97	PIVS	INSET VERTICAL SYNC	0-63	22				22
98	PMVS	MAIN VERTICAL SYNV	0-63	17				17
99	PCON	PIP CONTRAST	0-15	10				10
100	PFRY	PIP FRAME Y	0-15	5				5
101	PFRC	PIP FRAME CHROMA	0-255	0				0
102	PFRW	PIP FRAME WIDTH	0-31	20				20
103	PSEL	PIP SEL	0,1	1				1
104	PPLL	PIP PLL	0-3	0				0
105	PVPE	PIP V PED	0-15	0				0
106	PUPE	PIP U PED	0-15	0				0

* NTSC MODELS
** TRINORMA MODELS

SERVICE ID0 25

Note: No. 1 through 106 show adjustment order.

(5) Feature ID Map

	KV-	DESTINATION	ID-0	ID-1	ID-2	ID-3	ID-4	ID-5	ID-6	ID-7
1	**27V40**	(US)	153	19	173	194	31	1	0	64
2	**27V40**	(CND)	129	19	173	194	31	1	0	64
3	**27V45**	(US)	153	23	173	194	31	1	1	64
4	**27V45**	(CND)	129	23	173	194	31	1	1	64
5	**27V65**	(US)	153	23	175	194	31	1	7	64
6	**27V65**	(CND)	129	23	175	194	31	1	7	64
7	**29VL40**	(E)	145	19	173	194	63	1	0	64
8	**29VL65A**	(E)	151	23	175	195	55	1	7	64
9	**29VL65C**	(E)	145	23	175	194	63	1	7	64
10	**29VL85**	(E)	145	23	173	194	63	1	1	64
11	**29VL95**	(E)	145	23	175	194	63	1	7	64

5-2. A BOARD ADJUSTMENTS

H. FREQUENCY ADJUSTMENT

1. Input a monoscope signal.
2. Set to Service adjustment Mode.
3. Connect a frequency counter to base of Q501 (TP-500 H. DRIVE).
4. Select the item of AFC, set to 3 level (free run).
5. Check H. Frequency for the 15735 ± 200 Hz. (NTSC) or check H. Frequency for the 15650 ± 200 Hz. (Trinorma)
6. Select the item of AFC again, adjust the level "0".
7. Write into the memory by pressing [MUTING] then [ENTER] .

V. FREQUENCY ADJUSTMENT

1. Select video 1 with no signal input.
2. Set the conditions with standard setting.
3. Connect the frequency counter across TP-508 or CN501 VDY (+) pin ⑥ connector and ground.
4. Check V. Frequency for the 60 ± 2 Hz (NTSC)
5. Check V. Frequency for the 50 ± 2 Hz (Trinorma).

SUB CONTRACT ADJUSTMENT (SCON)

1. Input a color-bar signal.
2. Select the red color.
3. Set to Service adjustment Mode.
4. Select the item DCOL to "0" level.
5. Set the conditions as follows.

PICTURE . . . . . MAX
COLOR . . . . . MIN
BRIGHT . . . . . CENTER

R ON . . . . . ON (1)
G ON . . . . . OFF (0)
B ON . . . . . OFF (0)



6. Connect an oscilloscope probe to C Board, CN1702 Pin ⑤ (R OUT).
7. Select RDRV with [1] and [4] .
8. Adjust with [3] and [6] for: 1.90 ± 0.05 Vp-p.



9. Reset the item DCOL to "1" level.
10. Write the memory by pressing [MUTING] then [ENTER] .
11. Return the following back to normal after adjustment.

PICTURE . . . . . MAX
COLOR . . . . . CENTER
BRIGHT . . . . . CENTER

R ON . . . . . ON (1)
G ON . . . . . ON (1)
B ON . . . . . ON (1)

DISPLAY POSITION ADJUSTMENT (DISP)

1. Input a color-bar signal.
2. Set to Service adjustment Mode.
3. Select DISP with 1 and 4 .
4. Adjust with 3 and 6 for adjustment of characters to center .
5. Write the memory by pressing MUTING then ENTER .
6. Check if the text is displayed on the screen.



SUB BRIGHT ADJUSTMENT (SBRT)

1. Input a cross-hatch signal.
2. Set to Service adjustment Mode.
3. Set the PICTURE and BRIGHT to minimum.
4. Select SBRT with 1 and 4 .
5. Adjust with 3 and 6 to obtain a faintly visible cross-hatch.
6. Write into the memory by pressing MUTING then ENTER.

SUB HUE, SUB COLOR ADJUSTMENT (SHUE, SCOL)

1. Input a color-bar signal.
2. Set to Service adjustment Mode.
3. Select the item DCOL and set to "0" level.
4. Connect oscilloscope probe to C Board, CN1702 Pin ⑦ (B OUT).
5. Select SHUE and SCOL with 1 and 4 .
6. Adjust with 3 and 6 for the V1 = V4 ± 0.1Vp-p (SCOL) and V2 = V3 ± 0.1Vp-p (SHUE).



7. Reset the item DCOL to "1" level.
8. Write into the memory by pressing MUTING then ENTER .

V. SIZE ADJUSTMENT (VSIZ)

1. Input a cross-hatch signal.
2. Set to Service adjustment mode.
3. Select VSIZ with 1 and 4 .
4. Adjust with 3 and 6 for the best vertical size.

V. SIZE (VSIZ)



V. CENTER ADJUSTMENT (VPOS)

1.Input a cross-hatch signal.
2.Set to Service adjustment Mode.
3.Select VPOS with 1 and 4 .
4.Adjust with 3 and 6 for the best vertical center.
5.Write into the memory by pressing MUTING then ENTER

V. CENTER (VPOS)



H. CENTER ADJUSTMENT (HPOS)

Note : Perform this adjustment after checking H. FREQUENCY.

1. Input a cross-hatch signal.
2. Set the Service adjustment Mode.
3. Select HPOS with 1 and 4 .
4. Adjust with 3 and 6 for the best horizontal center.
5. Write into the memory by pressing MUTING then ENTER

H. CENTER (VPOS)



V. LINEARITY (VLIN) AND V CORRECTION

1. Input a cross-hatch signal.
2. V. Correction is automatically adjusted from the circuit and should satisfy the conditions below:

V LINEARITY (VLIN)



V CORRECTION



SERVICE ADJUSTMENT MODE MEMORY

1. Change DCOL to "1".
2. After completing all adjustments, press "0" then ENTER .

READ FROM MEMORY



Green
0

Red
ENTER

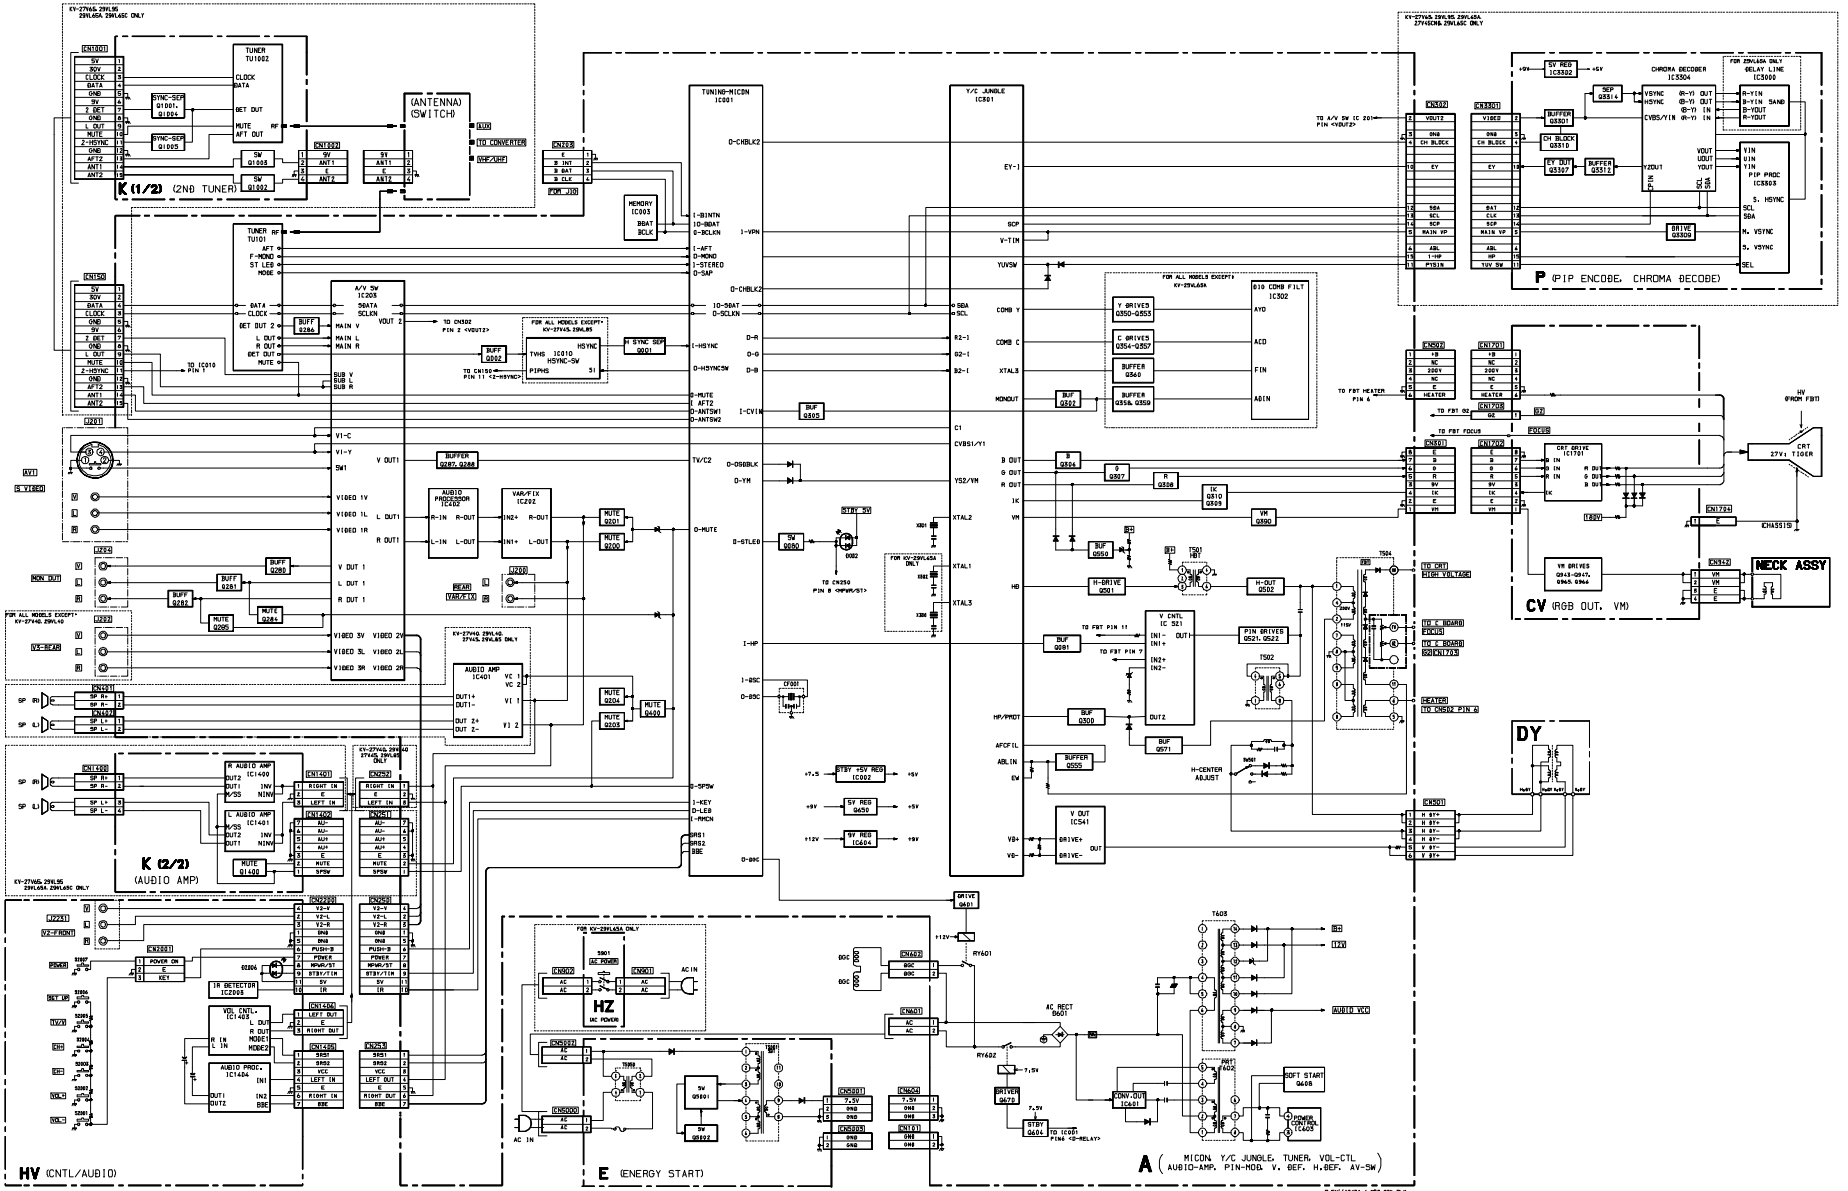

nted by CAMCAD :(Ba43blk)

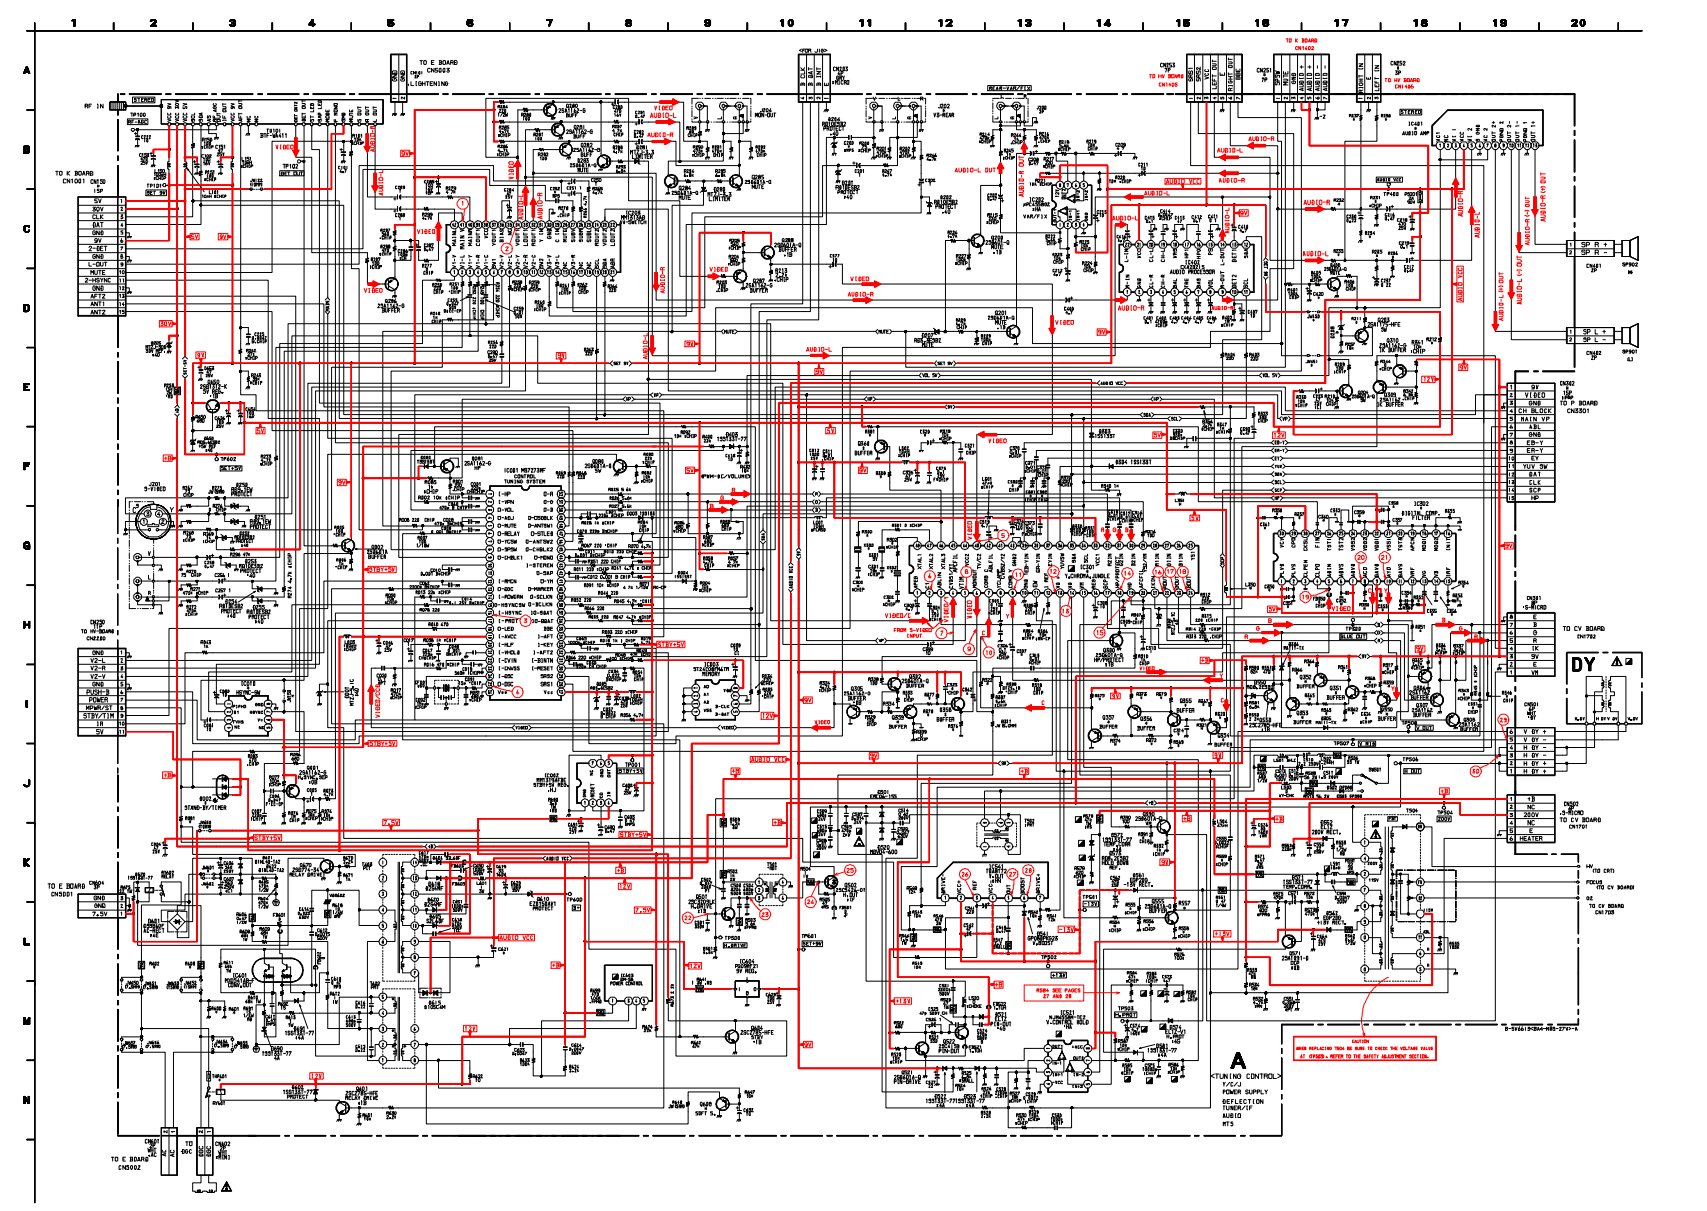
A
<TUNING CONTROL>
Y/C/J
POWER SUPPLY
DEFLECTION
TUNER/IF
AUDIO
MTS
DY
CAUTION
WHEN REPLACING TRON, BE SURE TO CHECK THE VOLTAGE VALUE
AT 4P600. REFER TO THE SAFETY ADJUSTMENT SECTION.

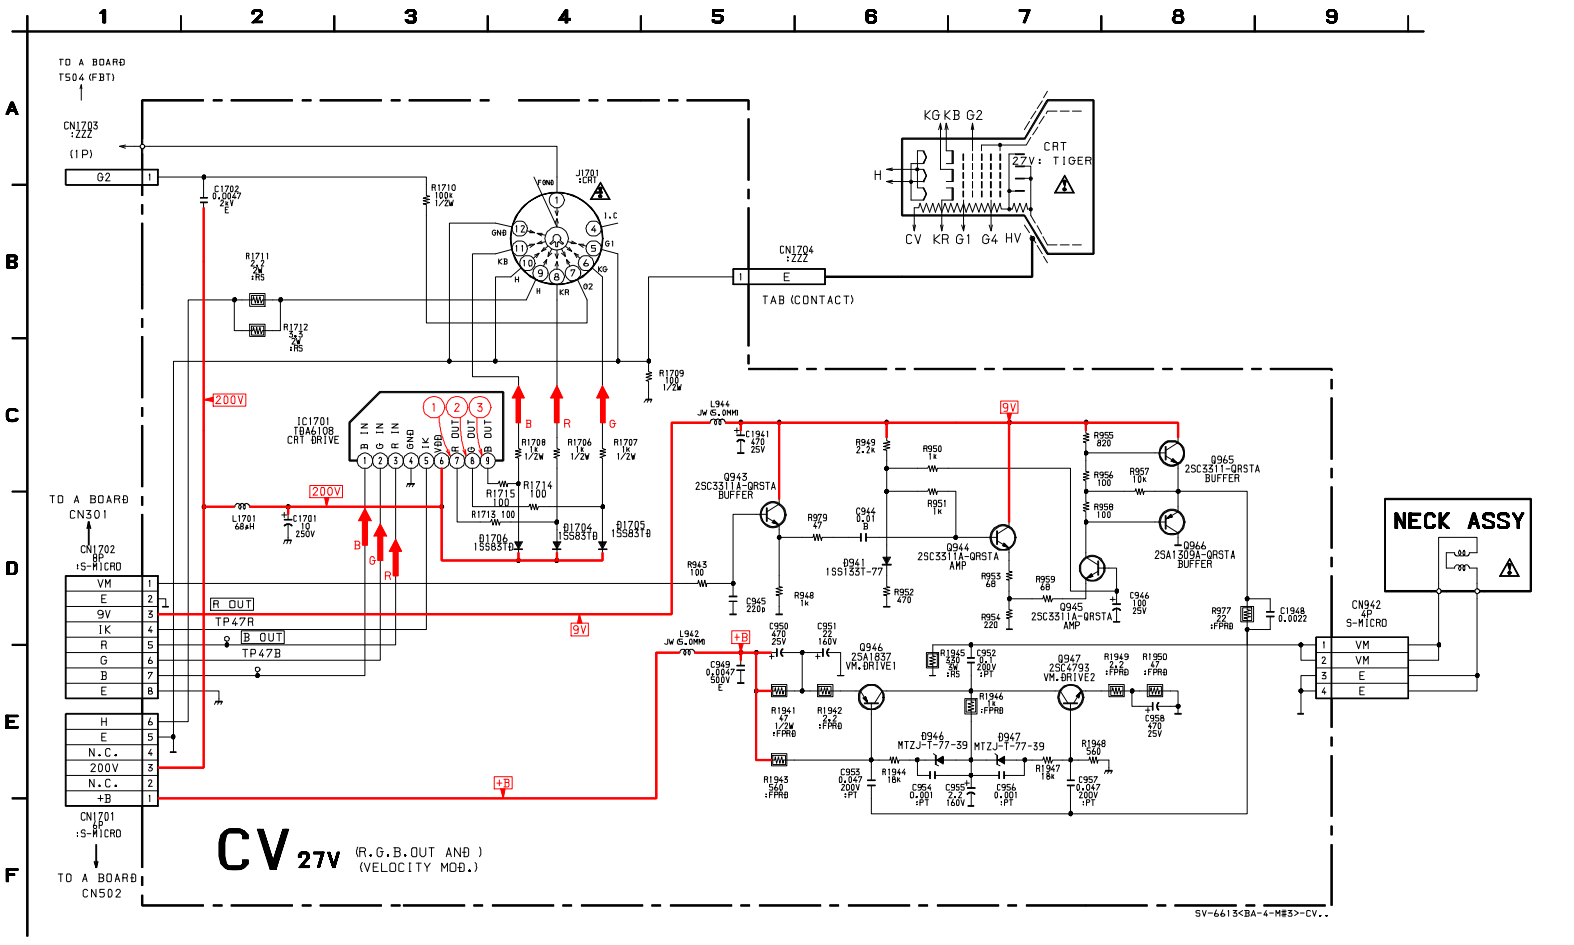
1 2 3 4 5 6 7 8 9
A B C D E F
TO A BOARD
T504 (FBT)
CN1703
:ZZZ
(1P)
G2
C1702
0.0047
25V
E
R1710
100K
1/2W
R1711
2.2
1/2W
:RS
R1712
2.2
1/2W
:RS
J1701
:CRT
F.GND
G.N.D
K.B
H
K.R
G1
G2
I.C
CN1704
:ZZZ
1
E
TAB (CONTACT)
KG KB G2
H
CRT
ZZV: TIGER
CV KR G1 G4 HV
R1709
100
1/2W
200V
IC1701
TBA6108
CRT DRIVE
B IN
G IN
R IN
GND
IK
R OUT
G OUT
B OUT
R1708
1K
1/2W
R1706
1K
1/2W
R1707
1K
1/2W
R1714
100
R1715
100
R1713 100
D1704
1SS83TB
D1705
1SS83TB
D1706
1SS83TB
B
G
R
L1701
68uH
C1701
10
250V
TO A BOARD
CN301
CN1702
8P
:S-MICRO
VM 1
E 2
9V 3
IK 4
R 5
G 6
B 7
E 8
R OUT
TP47R
B OUT
TP47B
H 6
E 5
N.C. 4
200V 3
N.C. 2
+B 1
CN1701
6P
:S-MICRO
TO A BOARD
CN502
L944
JW 6.0MM
C1941
470
25V
Q943
2SC3311A-QRSTA
BUFFER
R949
2.2K
R950
1K
R951
1K
R979
47
C944
0.01
B
D941
1SS133T-77
Q944
2SC3311A-QRSTA
AMP
R952
470
R953
68
R954
220
R959
68
Q945
2SC3311A-QRSTA
AMP
C946
100
25V
R943
100
C945
220P
R948
1K
9V
R955
820
R956
100
R957
10K
R958
100
Q965
2SC3311-QRSTA
BUFFER
Q966
2SA1309A-QRSTA
BUFFER
R977
22
:FPRB
C1948
0.0022
NECK ASSY
CN942
4P
S-MICRO
VM 1
VM 2
E 3
E 4
L942
JW 6.0MM
+B
C949
0.0047
500V
E
C950
470
25V
C951
22
160V
Q946
2SA1837
VM.DRIVE1
R1945
220
3W
:RS
C952
0.1
200V
:PT
Q947
2SC4793
VM.DRIVE2
R1949
2.2
:FPRB
R1950
47
:FPRB
C958
470
25V
R1946
1K
:FPRB
R1941
47
1/2W
:FPRB
R1942
2.2
:FPRB
D946
MTZJ-T-77-39
D947
MTZJ-T-77-39
R1943
560
:FPRB
C953
0.047
200V
:PT
R1944
18K
C954
0.001
:PT
C955
2.2
160V
C956
0.001
:PT
R1947
18K
R1948
560
C957
0.047
200V
:PT
CV 27V (R.G.B.OUT AND)
(VELOCITY MOD.)
SV-6613<BA-4-M83>-CV..

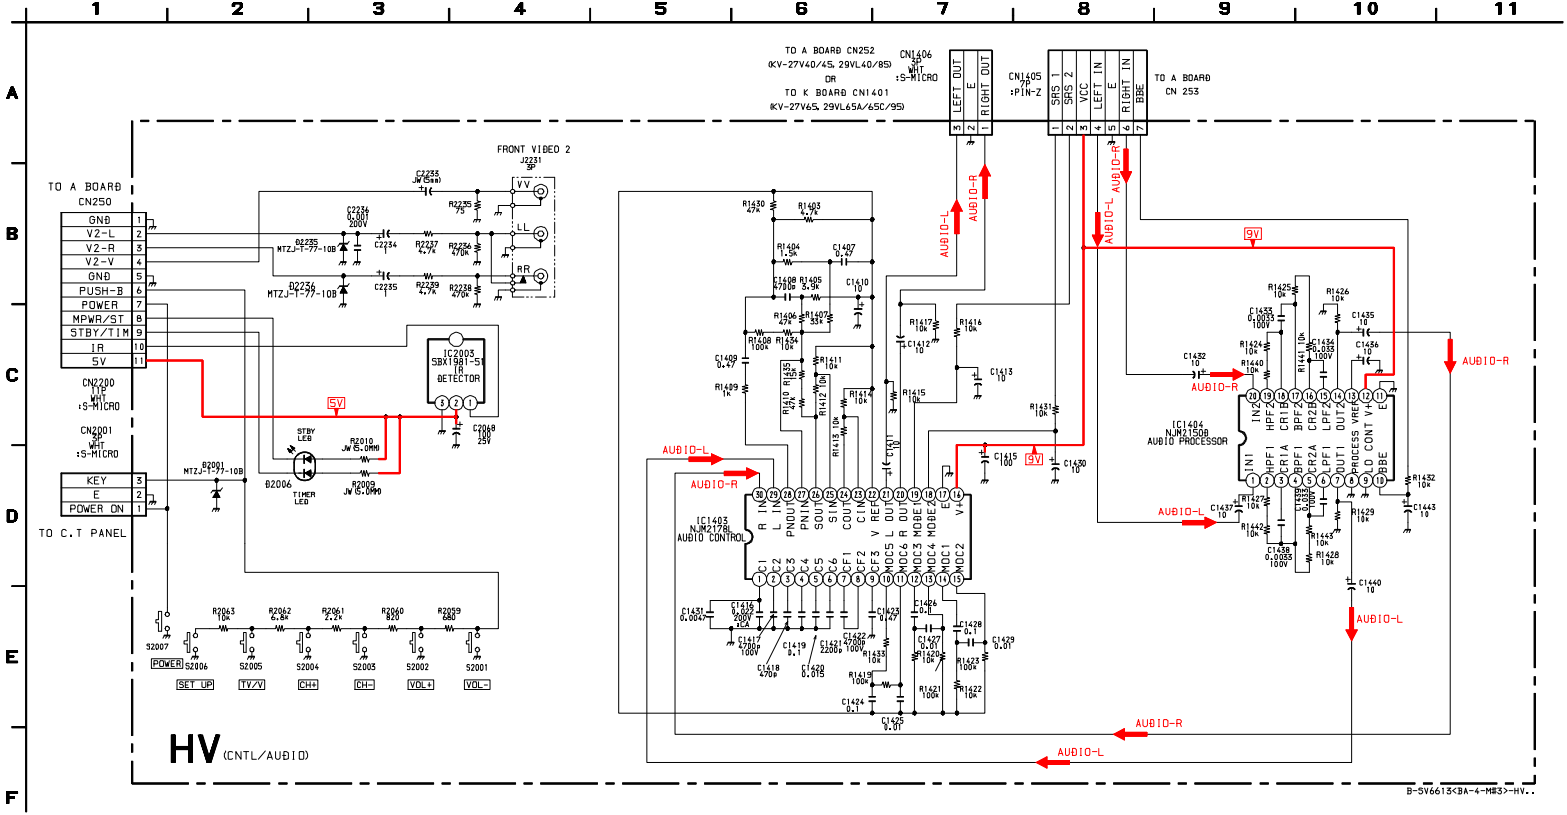

B-SV6613<BA-4-ME3>-HV..

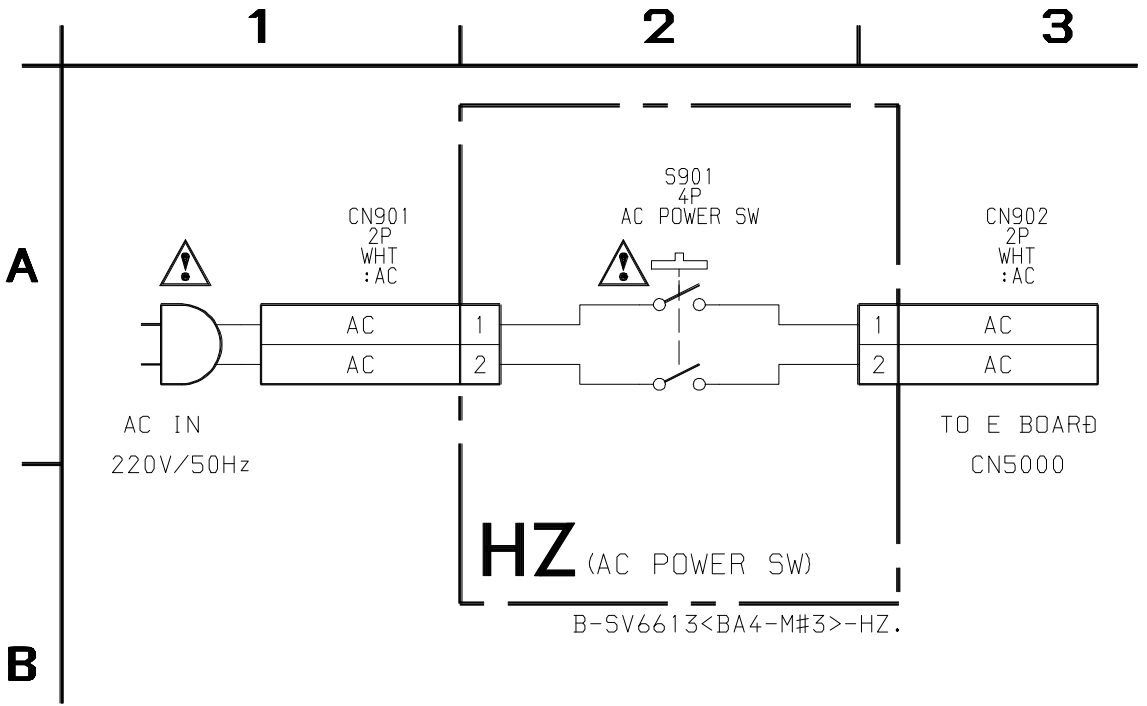
1
2
3
A
B
CN901
2P
WHT
:AC
S901
4P
AC POWER SW
CN902
2P
WHT
:AC
AC
AC
1
2
AC
AC
AC IN
220V/50Hz
TO E BOARD
CN5000
HZ (AC POWER SW)
B-SV6613<BA4-M#3>-HZ.

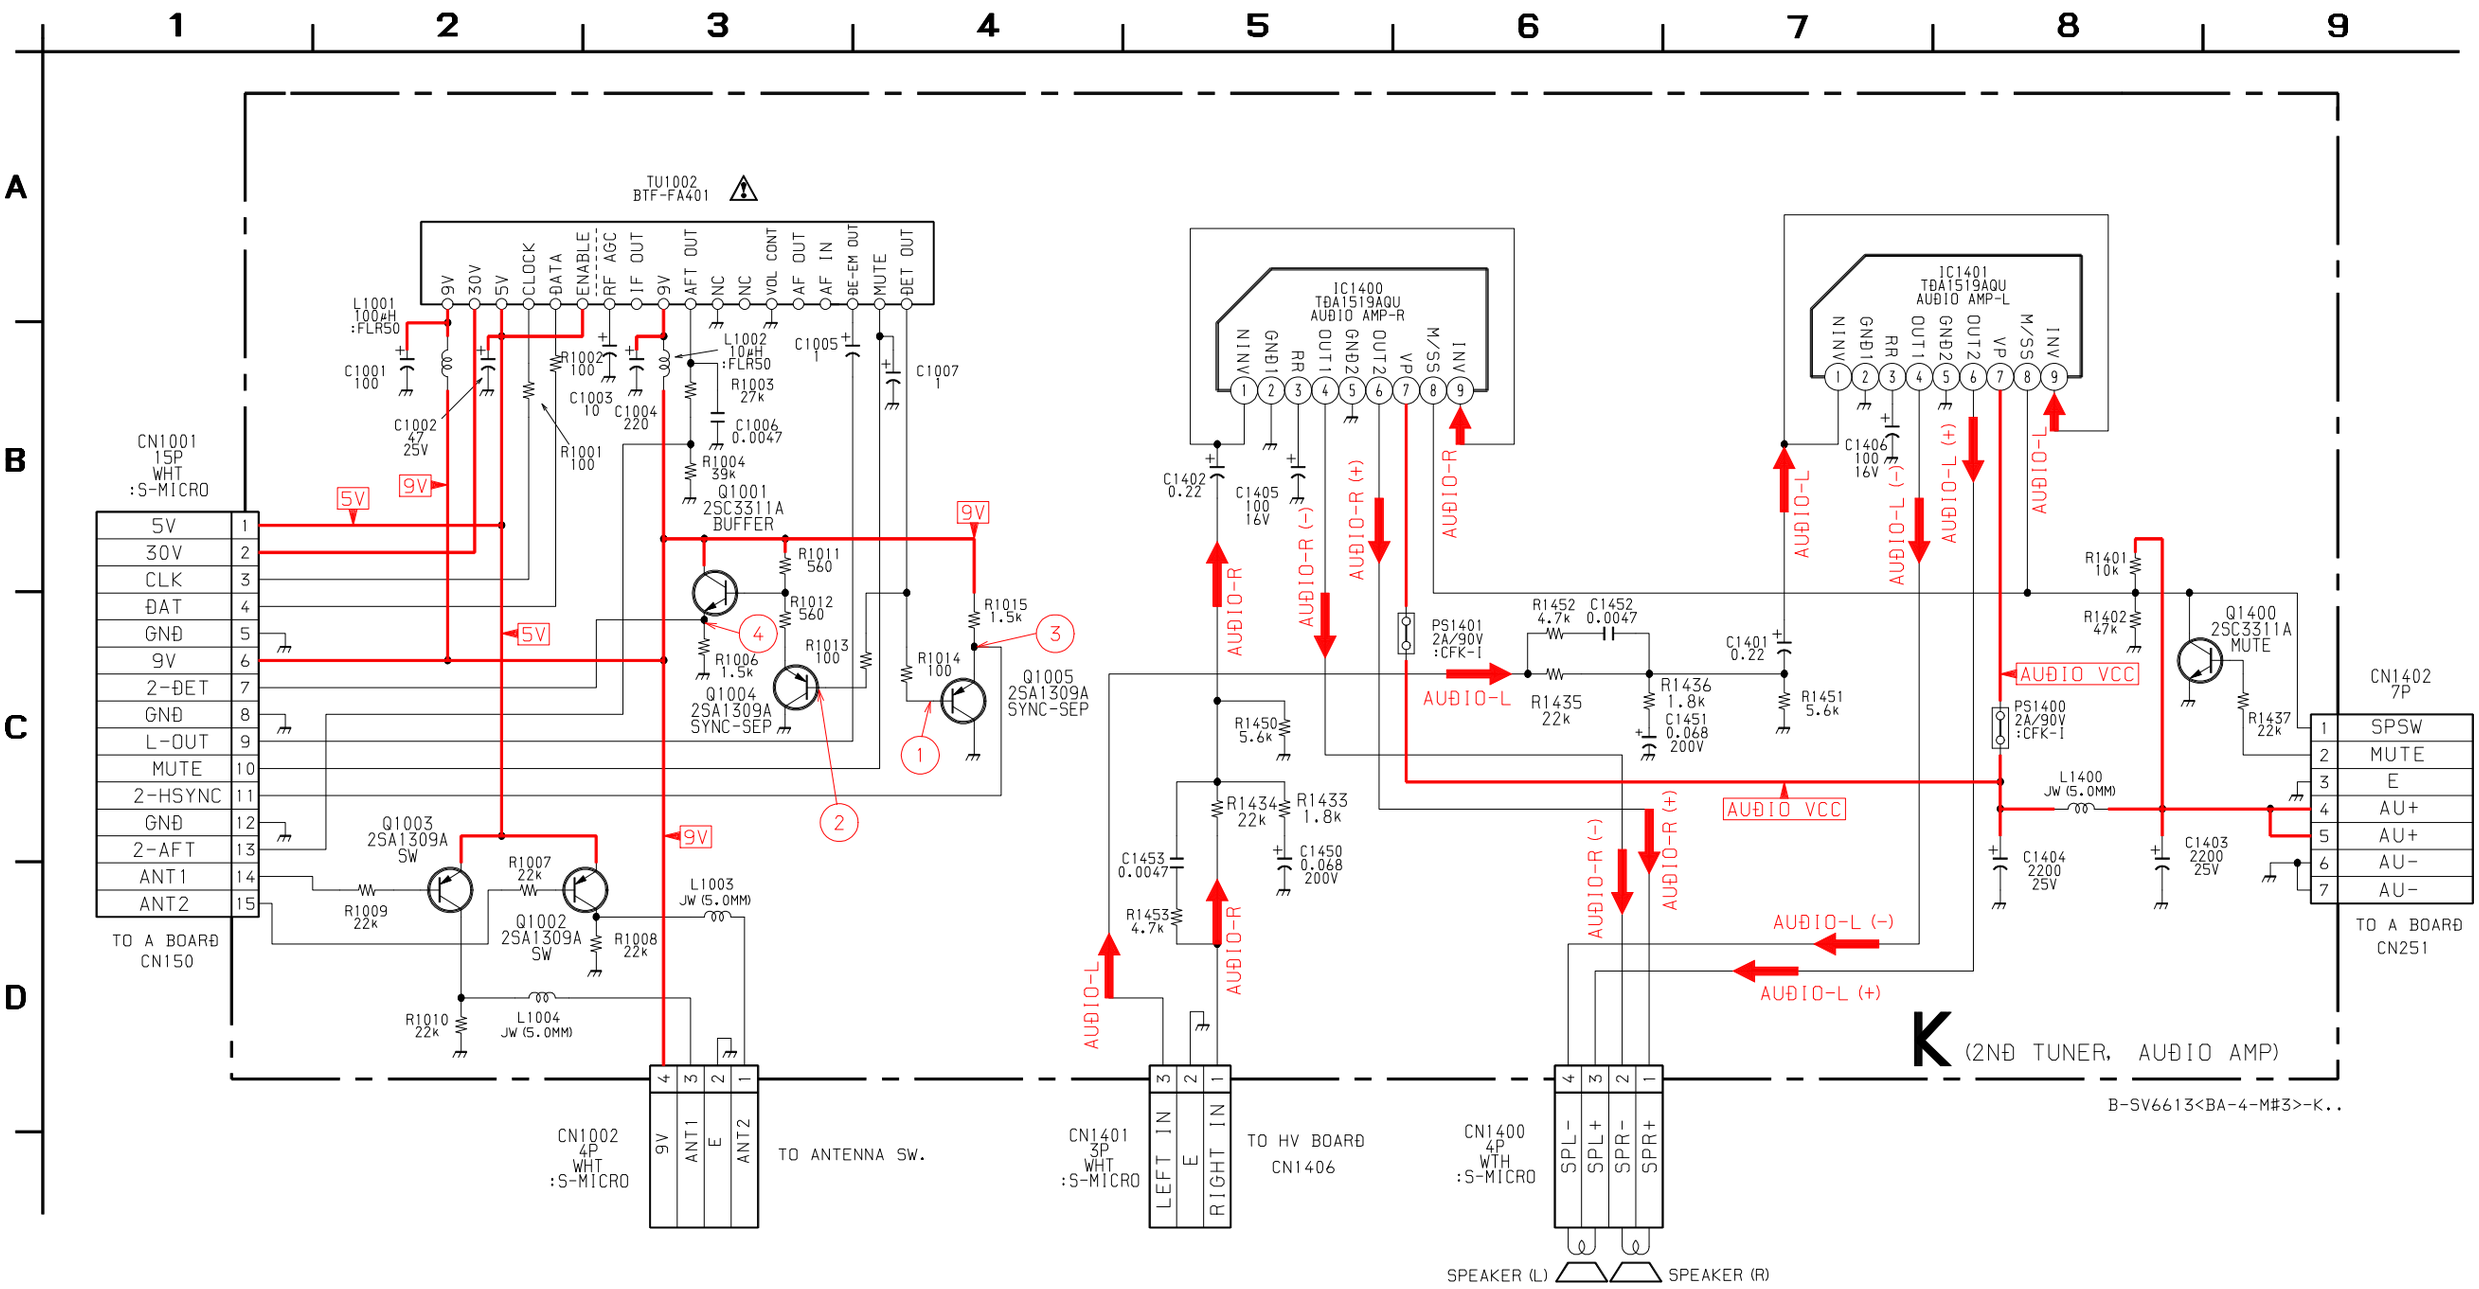
TU1002
BTF-FA401
9V
30V
5V
CLOCK
ĐATA
ENABLE
RF AGC
IF OUT
9V
AFT OUT
NC
NC
VOL CONT
AF OUT
AF IN
ĐE-EM OUT
MUTE
ĐET OUT
CN1001
15P
WHT
:S-MICRO
5V
30V
CLK
ĐAT
GNĐ
9V
2-ĐET
GNĐ
L-OUT
MUTE
2-HSYNC
GNĐ
2-AFT
ANT1
ANT2
TO A BOARĐ
CN150
Q1001
2SC3311A
BUFFER
Q1004
2SA1309A
SYNC-SEP
Q1005
2SA1309A
SYNC-SEP
Q1003
2SA1309A
SW
Q1002
2SA1309A
SW
L1001
100µH
:FLR50
L1002
10µH
:FLR50
L1003
JW (5.0MM)
L1004
JW (5.0MM)
CN1002
4P
WHT
:S-MICRO
9V
ANT1
E
ANT2
TO ANTENNA SW.
IC1400
TĐA1519AQU
AUĐIO AMP-R
IC1401
TĐA1519AQU
AUĐIO AMP-L
PS1401
2A/90V
:CFK-I
PS1400
2A/90V
:CFK-I
AUĐIO-R
AUĐIO-R (-)
AUĐIO-R (+)
AUĐIO-L
AUĐIO-L (-)
AUĐIO-L (+)
AUĐIO VCC
CN1401
3P
WHT
:S-MICRO
LEFT IN
E
RIGHT IN
TO HV BOARĐ
CN1406
CN1400
4P
WTH
:S-MICRO
SPL-
SPL+
SPR-
SPR+
SPEAKER (L)
SPEAKER (R)
CN1402
7P
SPSW
MUTE
E
AU+
AU+
AU-
AU-
TO A BOARĐ
CN251
K (2NĐ TUNER, AUĐIO AMP)
B-SV6613<BA-4-M#3>-K..

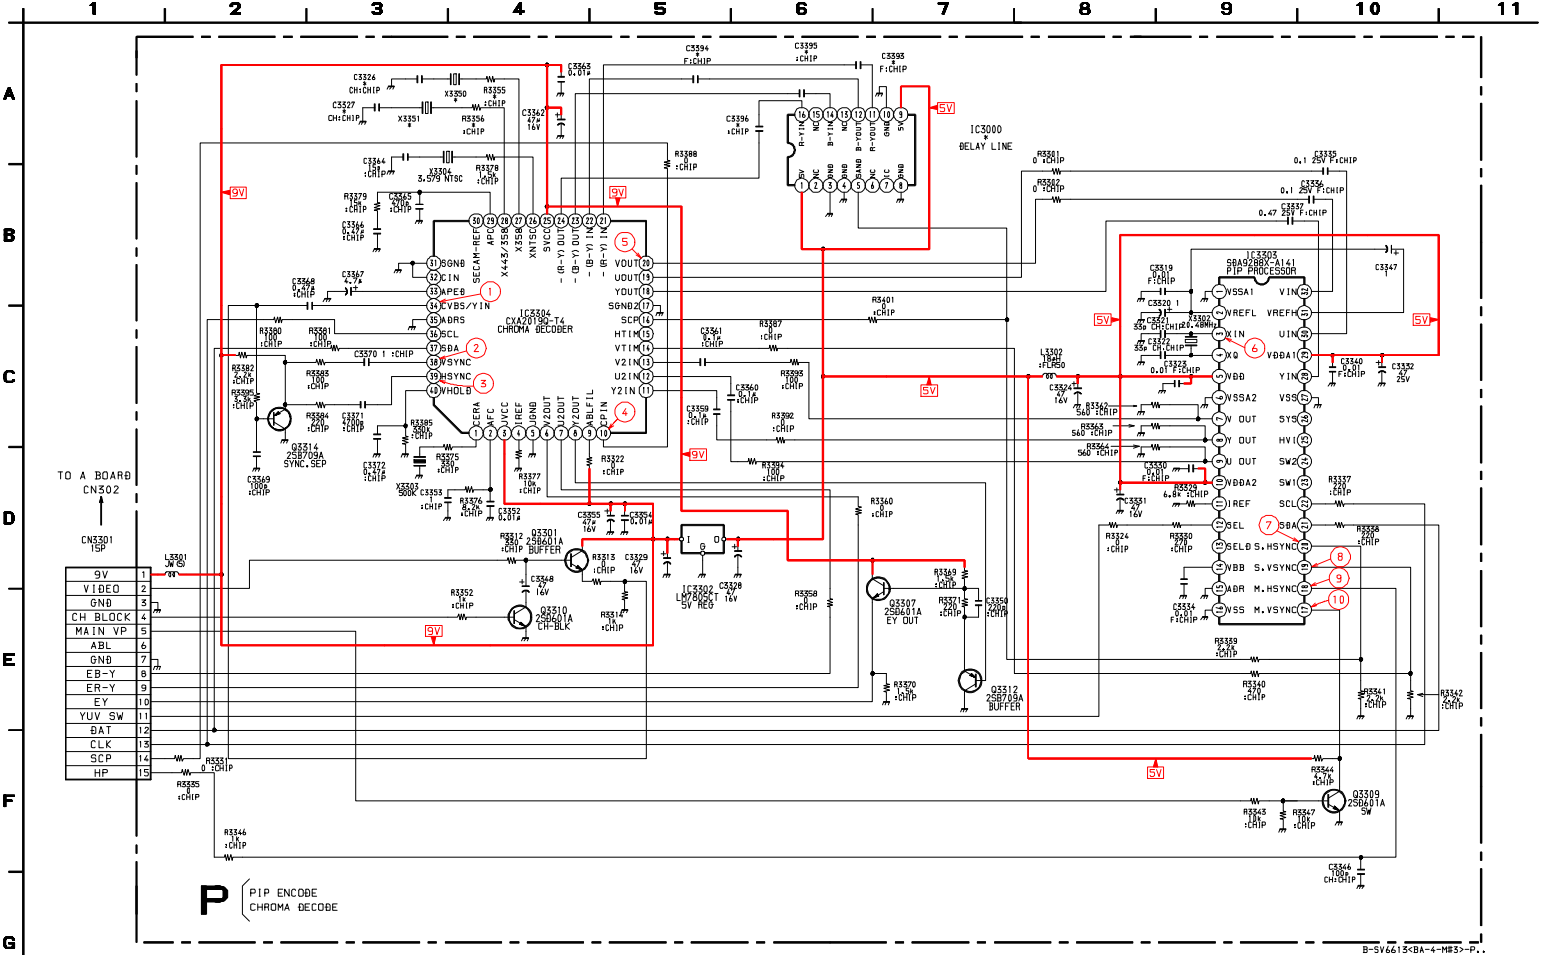
1
2
3
4
5
6
7
8
9
10
11
A
B
C
D
E
F
G
TO A BOARD
CN302
CN3301
ISP
9V 1
VIDEO 2
GND 3
CH BLOCK 4
MAIN VP 5
ABL 6
GND 7
EB-Y 8
ER-Y 9
EY 10
YUV SW 11
BAT 12
CLK 13
SCP 14
HP 15
IC3000
DELAY LINE
IC3304
CXA2018S-T4
CHROMA DECODER
IC3303
SBA2980C-A141
PIP PROCESSOR
IC3302
LA7840KT
5V REG
Q3314
2SB709A
SYNC. SEP
Q3301
2SD601A
BUFFER
Q3310
2SD601A
CH-BLK
Q3307
2SD601A
EY OUT
Q3312
2SB709A
BUFFER
Q3309
2SD601A
SW
P
PIP ENCODE
CHROMA DECODE
B-SV6613<BA-4-M#3>-P..

6-2. Circuit Boards Location

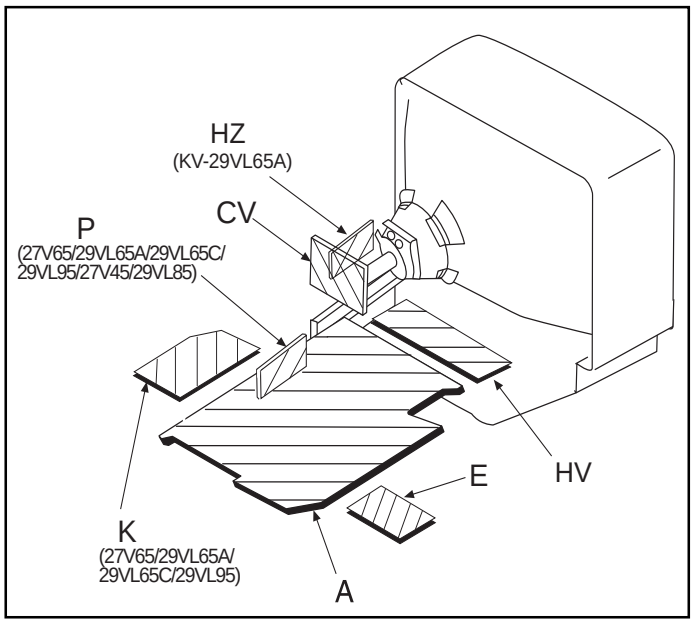

Part replaced (◪)	Adjustment (⋈)
IC301,IC521,IC603, DY, D573, D574 C505, C507, C508, C509, C511, C515, C520, C572, C573, C574, C575, L591, L501, R582, R583, R585, R586, R578, R579, T504 (FBT)	HV HOLD-DOWN (R584)
IC603, IC601, R699	B+ VOLTAGE CONFIRMATION

6-3. Printed Wiring Boards and Schematic Diagrams

Note:

- All capacitors are in μF unless otherwise noted. pF: μμF 50V or less are not indicated except for electrolytic and tantalums.
- All electrolytics are 50V unless otherwise specified
- Indication of resistance, which does not have one for rating electrical power, is as follows:

Pitch: 5mm Rating electrical power 1/4W

- All resistors are in ohms.
  KΩ=1000Ω, MΩ=1000KΩ
- ⊣▭⊢ nonflammable resistor.
- Δ: internal component.
- ▭: panel designation and adjustment for repair.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.
- The components identified by ◪ in this manual have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation. Should replacement be required, replace only with the value originally used.
- When replacing components identified by ◪ make the necessary adjustments indicated. If results do not meet the specified value, change the component identified by ⋈ and repeat the adjustment until the specified value is achieved.
  (Refer to R584 on page 27 and 28).
- When replacing parts in the table below be sure to perform the related adjustment.

- All voltages are in V.
- Voltage is DC with respect to ground unless otherwise noted.
- Readings are taken with a 10MΩ digital multimeter.
- Readings are taken with a color-bar signal input.
- Voltage variations may be noted due to normal production tolerance.
- Circled numbers are waveform references.

- ▬▬ : B + Line
- - - - - : B - Line
- ⇨ : signal path

Reference Information

RESISTOR	:	RN	METAL FILM
	:	RC	SOLID
	:	FPRD	NON FLAMMABLE CARBON
	:	FUSE	NON FLAMMABLE FUSIBLE
	:	RW	NON FLAMMABLE WIREWOUND
	:	RS	NON FLAMMABLE METAL OXIDE
	:	RB	NON FLAMMABLE CEMENT
	:	※	ADJUSTMENT RESISTOR
COIL	:	LF-8L	MICRO INDUCTOR
CAPACITOR	:	TA	TANTALUM
	:	PS	STYROL
	:	PP	POLYPROPYLENE
	:	PT	MYLAR
	:	MPS	METALIZED POLYESTER
	:	MPP	METALIZED POLYPROPYLENE
	:	ALB	BIPOLAR
	:	ALT	HIGH TEMPERATURE
	:	ALR	HIGH RIPPLE

Note: The symbol ⊣▭⊢ display is on the component side.

The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

The symbol ⊣▭⊢ indicates fast operating fuse. Replace only with fuse of same rating as marked.

SECTION 7
EXPLODED VIEWS

• Items with no part number and no description are not stocked because they are seldom required for routine service

• The component parts of an assembly are indicated by the reference numbers in the remarks column.

• Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

Note:

The components identified with gray shading and a critical symbol (⚠) are critical for safety. Replace only with part number specified.

Note:

Les composants identifies per un trame et une marque ⚠ sont critiques pout la securite. Ne les remplacer que par une piece portant le numero specifie.

7-1. ONE TUNER CHASSIS (KV-27V40/27V45/29VL40/29VL85)

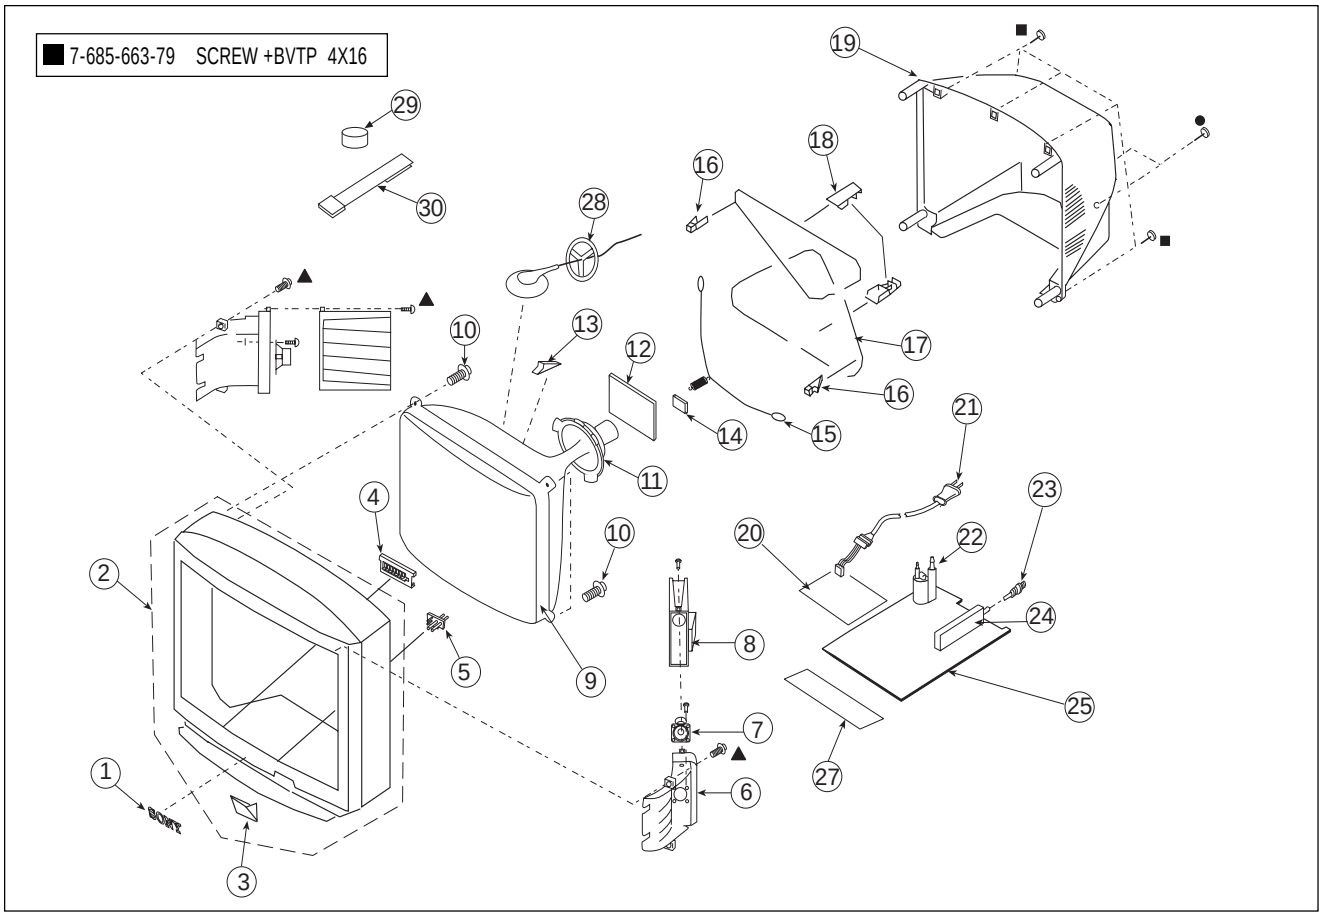

REF.NO.		PART NO.	DESCRIPTION	REMARK
1		4-046-160-01	EMBLEM (NO.9)	
2		X-4035-476-1	BEZNET ASSY (KV-27V40/29VL40)	3
2		X-4035-477-1	BEZNET ASSY (KV-27V45/29VL85)	3
3		4-052-906-01	DOOR CONTROL	
4		4-052-907-11	BUTTON MULTI	
5	*	4-052-897-01	GUIDE LED	
6		X-4035-400-1	BAFFLE ASSY, SPEAKER	
7		1-505-404-11	SPEAKER (8CM)	
8		X-4035-401-1	COVER ASSY, SPEAKER	
9	⚠	8-733-873-05	CRT29NX	
10		4-041-268-01	SCREW (7), TAPPING	
11	⚠	8-451-486-11	DY Y29NXA-V	
12	*	A-1331-838-A	CV BOARD, COMPLETE	
13		4-053-005-01	SPACER DY	
14		4-374-745-31	CUSHION (A)	
15		4-036-329-01	SPRING (B), TENSION	
16		4-040-388-01	HOLDER (S), DGC	
17	⚠	1-416-588-21	COIL, DEMAGNETIC	

REF.NO.		PART NO.	DESCRIPTION	REMARK
18		4-040-387-01	HOLDER (M), DGC	
19		4-063-018-11	COVER, REAR (KV-27V45/29VL85)	
19		4-063-018-21	COVER, REAR (KV-27V40/29VL40)	
20	*	A-1343-525-A	E BOARD, COMPLETE	
21	⚠	1-751-057-21	CORD, POWER (WITH CONNECTOR)	
22	⚠	1-453-268-11	TRANSFORMER ASSY (NX-4005/X4J4)	
23		1-766-374-11	PLUG, F-PIN	
24	⚠	8-598-341-00	TUNER, FSS BTF-WA411	
25	*	A-1298-482-A	A BOARD, COMPLETE (KV-29VL40/27V40)	
25	*	A-1298-565-A	A BOARD, COMPLETE (KV-27V45/29VL85)	
26	*	A-1190-306-A	P BOARD, COMPLETE (KV-27V45/29VL85)	
27	*	A-1372-479-A	HV BOARD, COMPLETE	
28		3-704-372-31	HOLDER, HV	
29		1-452-032-00	MAGNET, DISC	
30		4-062-047-01	PIECE A (110)	
31		4-065-807-01	LATIN LABEL (KV-29VL40)	
31		4-065-808-01	LATIN LABEL (KV-29VL85)	
32	*	3-703-353-02	SUPPORT, PC	

Note:

The components identified with gray shading and a critical symbol (⚠) are critical for safety. Replace only with part number specified.

Note:

Les composants identifies per un trame et une marque ⚠ sont critiques pout la securite. Ne les remplacer que par une piece portant le numero specifie.

7-2. TWO TUNER CHASSIS (KV-27V65/29VL65A/29VL65C/29VL95)

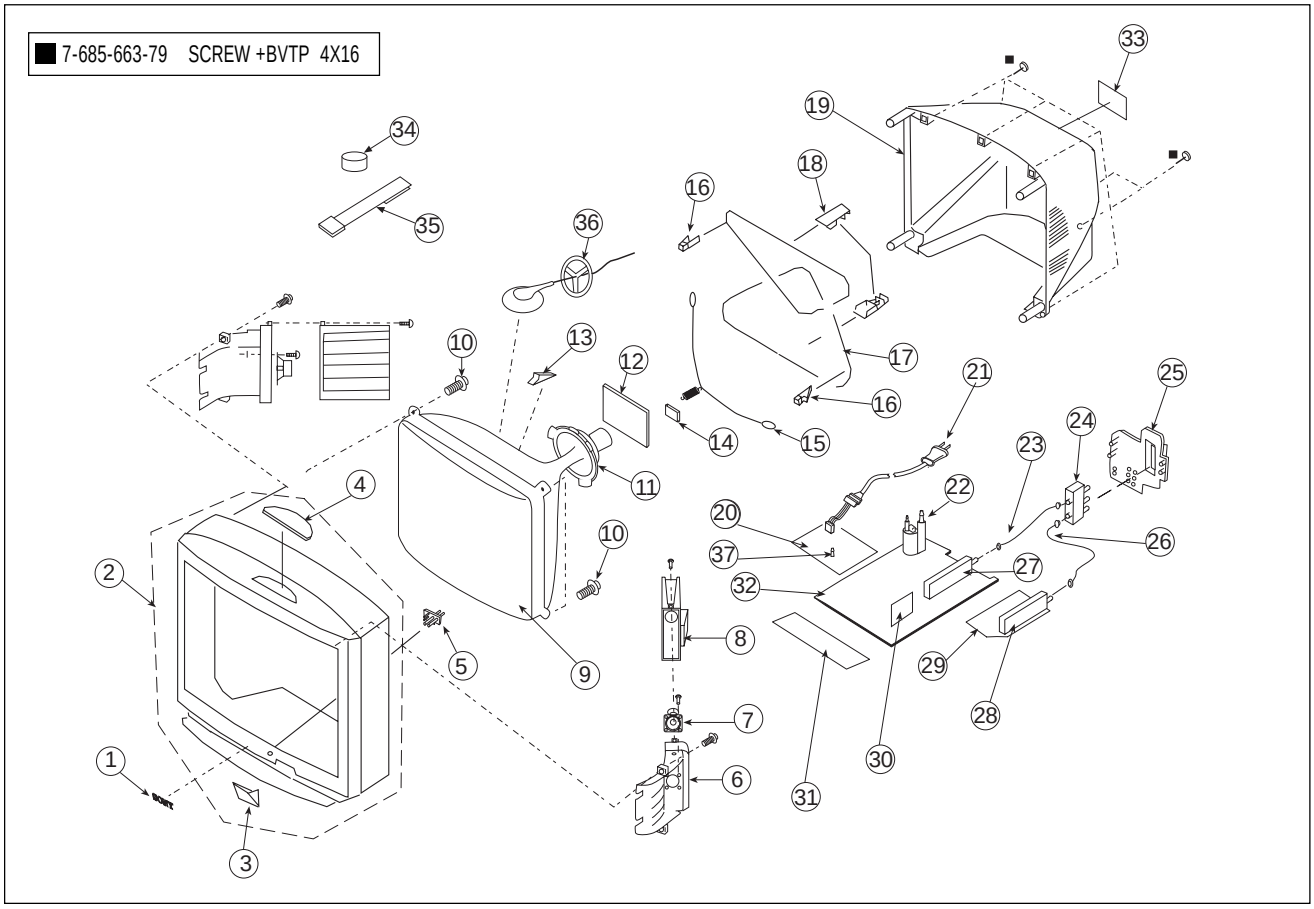

REF.NO.		PART NO.	DESCRIPTION	REMARK
1		4-046-160-01	EMBLEM (NO.9)	
2		X-4035-478-1	BEZNET ASSY (KV-27V65/29VL65C/29VL95)	3-4
2		X-4035-479-1	BEZNET ASSY (KV-29VL65A)	3-4
3		4-052-906-01	DOOR, CONTROL	
4		1-473-549-21	SWITCH BLOCK CONTROL	
5	*	4-052-897-01	GUIDE,LED	
6		X-4035-400-1	BAFFLE ASSY, SPEAKER	
7		1-505-893-11	SPEAKER (8CM)	
8		X-4035-401-1	COVER ASSY, SPEAKER	
9	⚠	8-733-873-05	CRT29NX (KV-27V65/29VL95)	
9	⚠	8-733-874-05	CRT29NX (KV-29VL65A/29VL65C)	
10		4-041-268-01	SCREW (7) TAPPING	
11	⚠	8-451-486-11	DY Y29NXA-V	
12	*	A-1331-838-A	CV BOARD, COMPLETE	
13		4-053-005-01	SPACER,DY	
14		4-374-745-31	CUSHION (A)	
15		4-036-329-01	SPRING (B), TENSION	
16		4-040-388-01	HOLDER (S), DGC	
17	⚠	1-416-588-21	COIL, DEMAGNETIC (KV-27V65/29VL95)	
17	⚠	1-416-589-21	COIL, DEMAGNETIC (KV-29VL65A/29VL65C)	
18		4-040-387-01	HOLDER (M), DGC	
19		4-063-018-01	COVER, REAR	
20	*	A-1343-525-A	E BOARD, COMPLETE (KV-27V65/29VL95)	
20	*	A-1343-526-A	E BOARD, COMPLETE (KV-29VL65A/29VL65C)	

REF.NO.		PART NO.	DESCRIPTION	REMARK
21	⚠	1-751-057-11	CORD, POWER W/CONNECTOR (KV-27V65/29VL95)	
21	⚠	1-783-838-31	CORD, POWER W/CONNECTOR (KV-29VL65A)	
21	⚠	1-769-796-71	CORD, POWER W/CONNECTOR (KV-29VL65C)	
22	⚠	1-453-268-11	TRANSFORMER ASSY (NX-4005/X4J4)	
23		1-783-800-11	CABLE, PIN	
24		8-598-414-00	ANTENNA SWITCH AS-2F	
25		4-064-176-11	BRACKET, ANTENNA	
26	*	1-557-056-31	CABLE, P-P	
27	⚠	8-598-431-00	TUNER, FSS BTF-WA411	
28	⚠	8-598-430-00	TUNER, FSS BTF-FA401	
29	*	A-1380-571-A	K BOARD, COMPLETE	
30	*	A-1190-306-A	P BOARD, COMPLETE (KV-27V65/29VL65C/29VL95)	
30	*	A-1195-129-A	P BOARD, COMPLETE (KV-29VL65A)	
31	*	A-1372-479-A	HV BOARD, COMPLETE	
32	*	A-1298-486-A	A BOARD, COMPLETE (KV-27V65)	
32	*	A-1298-486-A	A BOARD, COMPLETE (KV-29VL95)	
32	*	A-1298-487-A	A BOARD, COMPLETE (KV-29VL65A)	
32	*	A-1298-583-A	A BOARD, COMPLETE (KV-29VL65C)	
33		4-065-809-01	LABEL, LATIN (KV-29VL65C/29VL95)	
34		1-452-032-00	MAGNET, DISC	
35		4-062-047-01	PIECE A (110)	
36		3-704-372-31	HOLDER, HV	
37	*	3-703-353-02	SUPPORT, PC	

• Items with no part number and no description are not stocked because they are seldom required for routine service

• The component parts of an assembly are indicated by the reference numbers in the remarks column.

• Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.

Note:

The components identified with gray shading and a critical symbol (⚠) are critical for safety. Replace only with part number specified.

Note:

Les composants identifies per un trame et une marque ⚠ sont critiques pout la securite. Ne les remplacer que par une piece portant le numero specifie.

7-3. MAIN POWER SWITCH (KV-29VL65A ONLY)

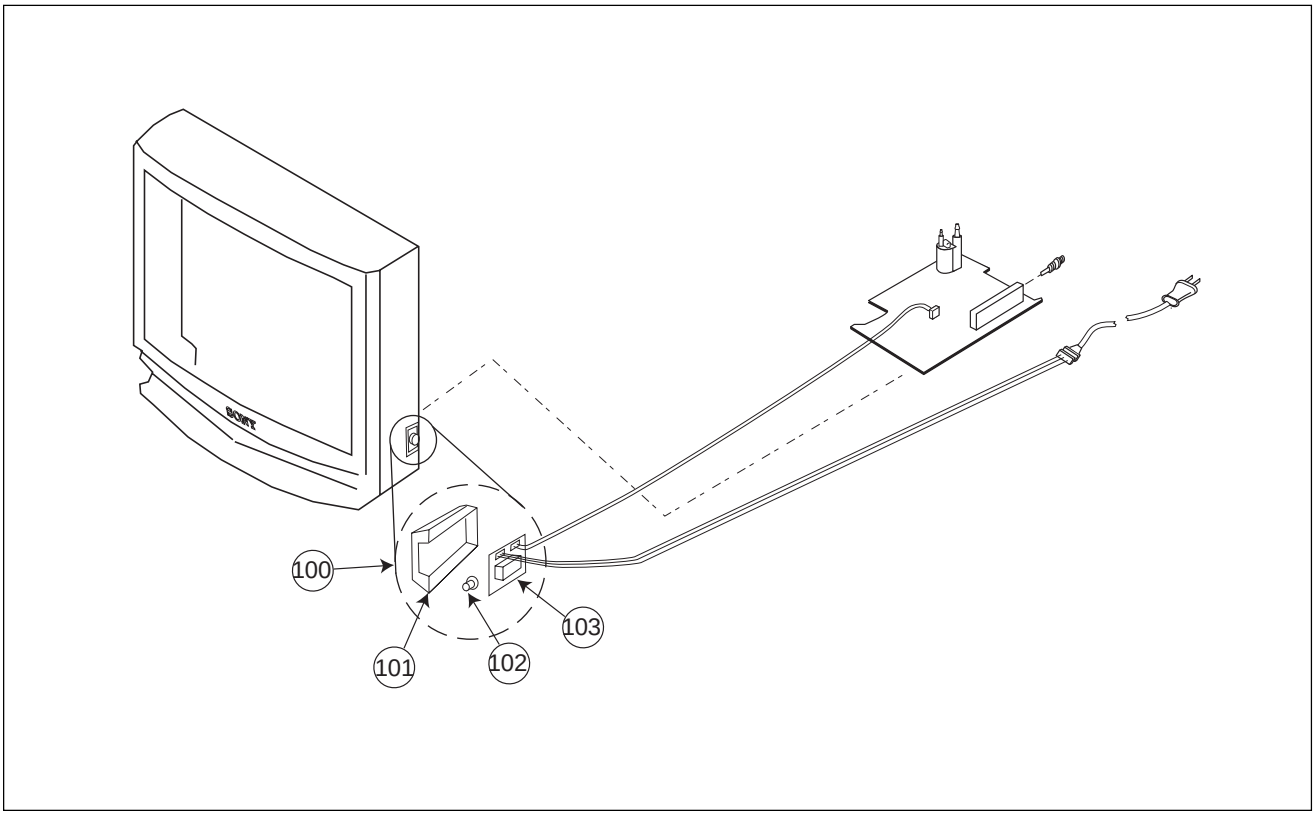

REF.NO.	PART NO.	DESCRIPTION	REMARK
100 *	A-148-056-A	BLOCK ASSY, HZ	101-103
101 *	4-048-201-21	BRACKET, PC BOARD HZ	
102 *	4-048-200-21	BUTTON, MAIN POWER	
103 *	A-1372-117-A	MOUNTED PCB, HZ	

SECTION 8
ELECTRICAL PARTS LIST

PARTS LISTING TABLE OF CONTENTS

Page

A BOARD COMMON PARTS LIST: Parts common to all models listed in this manual..... 61

A BOARD VARIANT PARTS LIST: Parts that belong only to the model specified..... 70

Refer to the designated variant parts list when seeking a part indicated by an asterisk (*) on the A board schematic or by the word "variant" on the common parts list.

Model	Page
KV-27V40/29VL40	70
KV-27V65/29VL95	72
KV-29VL65A	74
KV-27V45/29VL85	75
KV-29VL65C	77

CV BOARD COMPLETE PARTS LIST (All Models) 79

E BOARD COMPLETE PARTS LIST (All Models)..... 80

HV BOARD COMPLETE PARTS LIST 81

HZ BOARD COMPLETE PARTS LIST 82

K BOARD COMPLETE PARTS LIST 83

P BOARD COMPLETE PARTS LIST 84

ACCESSORIES AND PACKAGING 86

SECTION 7
ELECTRICAL PARTS LIST

Note:

The components identified by shading and mark ⚠ are critical for safety. Replace only with part number specified.

Note:

Les composants identifies per un trame et une marque ⚠ sont critiques pour la securite. Ne les remplacer que par une piece portant le numero specifie.

The components identified by ⋈ in this manual have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation. Should replacement be required, replace only with the value originally used.

- Items marked " * " are not stocked since they are seldom required for routine service. Some delay should be anticipated when ordering these items.
- All variable and adjustable resistors have characteristic curve B, unless otherwise noted.

RESISTORS
- All resistors are in ohms
- F : nonflammable

CAPACITORS
- MF = µF

INDUCTORS
- UH = µH, MMH = mH

When indicating parts by reference number, please include the board name.

REF.NO.	PART NO.	DESCRIPTION			REMARK
A					
	* A BOARD, COMPLETE				
	* A-1298-482-A (KV-27V40/29VL40)				
	* A-1298-486-A (KV-27V65/29VL95)				
	* A-1298-487-A (KV-29VL65A)				
	* A-1298-565-A (KV-27V45/29VL85)				
	* A-1298-583-A (KV-29VL65C)				
	4-382-854-01	SCREW	(M3X8), P, SW		(+)
	4-382-854-11	SCREW	(M3X10), P, SW		(+)
	CAPACITOR				
C001	1-163-259-91	CERAMIC CHIP	220PF	5%	50V
C004	1-107-701-11	ELECT	47MF	20%	25V
C005	1-126-960-11	ELECT	1MF	20%	50V
C006	1-163-035-00	CERAMIC CHIP	0.047MF		50V
C007	1-163-259-91	CERAMIC CHIP	220PF	5%	50V
C008	1-163-009-11	CERAMIC CHIP	0.001MF	10%	50V
C010	1-163-009-11	CERAMIC CHIP	0.001MF	10%	50V
C011	1-163-009-11	CERAMIC CHIP	0.001MF	10%	50V
C012	1-163-009-11	CERAMIC CHIP	0.001MF	10%	50V
C014	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C017	1-126-960-11	ELECT	1MF	20%	50V
C019	1-163-135-00	CERAMIC CHIP	560PF	5%	50V
C020	1-130-495-00	FILM	0.1MF	5%	50V
C021	1-163-259-91	CERAMIC CHIP	220PF	5%	50V
C028	1-163-005-11	CERAMIC CHIP	470PF	10%	50V
C030	1-163-259-91	CERAMIC CHIP	220PF	5%	50V
C034	1-163-037-11	CERAMIC CHIP	0.022MF	10%	50V
C037	1-164-161-11	CERAMIC CHIP	0.0022MF	10%	50V
C038	1-126-941-11	ELECT	470MF	20%	25V
C039	1-126-964-11	ELECT	10MF	20%	50V
C046	1-104-664-11	ELECT	47MF	20%	25V
C047	1-163-259-91	CERAMIC CHIP	220PF	5%	50V
C048	1-163-009-11	CERAMIC CHIP	0.001MF	10%	50V
C060	1-163-005-11	CERAMIC CHIP	470PF	10%	50V

REF.NO.	PART NO.	DESCRIPTION			REMARK
C062	1-164-161-11	CERAMIC CHIP	0.0022MF	10%	50V
C065	1-163-009-11	CERAMIC CHIP	0.001MF	10%	50V
C070	1-163-259-91	CERAMIC CHIP	220PF	5%	50V
C080	1-126-964-11	ELECT	10MF	20%	50V
C081	1-126-964-11	ELECT	10MF	20%	50V
C091	1-163-231-11	CERAMIC CHIP	15PF	5%	50V
C092	1-163-231-11	CERAMIC CHIP	15PF	5%	50V
C101	1-126-963-11	ELECT	4.7MF	20%	50V
C102	1-126-382-11	ELECT	100MF	20%	16V
C150	1-126-941-11	ELECT	470MF	20%	25V
C151	1-104-664-11	ELECT	47MF	20%	25V
C200		VARIANT (SEE VARIANT PARTS LIST)			
C201	1-126-960-11	ELECT	1MF	20%	50V
C202	1-126-960-11	ELECT	1MF	20%	50V
C207	1-126-959-11	ELECT	0.47MF	20%	50V
C208	1-126-959-11	ELECT	0.47MF	20%	50V
C209	1-126-963-11	ELECT	4.7MF	20%	50V
C211	1-126-964-11	ELECT	10MF	20%	50V
C212	1-126-963-11	ELECT	4.7MF	20%	50V
C213	1-126-964-11	ELECT	10MF	20%	50V
C216	1-126-959-11	ELECT	0.47MF	20%	50V
C217	1-126-959-11	ELECT	0.47MF	20%	50V
C218	1-126-941-11	ELECT	470MF	20%	25V
C219	1-130-495-00	FILM	0.1MF	5%	50V
C222	1-126-964-11	ELECT	10MF	20%	50V
C223	1-104-664-11	ELECT	47MF	20%	25V
C225	1-163-017-00	CERAMIC CHIP	0.0047MF	10%	50V
C230	1-126-957-11	ELECT	0.22MF	20%	50V
C237	1-126-957-11	ELECT	0.22MF	20%	50V
C250	1-126-960-11	ELECT	1MF	20%	50V
C251	1-126-960-11	ELECT	1MF	20%	50V
C252		VARIANT (SEE VARIANT PARTS LIST)			
C255	1-104-760-11	CERAMIC CHIP	0.047MF	10%	50V
C256	1-126-960-11	ELECT	1MF	20%	50V
C257	1-126-960-11	ELECT	1MF	20%	50V
C258	1-126-959-11	ELECT	0.47MF	20%	50V
C259	1-163-021-91	CERAMIC CHIP	0.01MF	10%	50V
C280	1-126-935-11	ELECT	470MF	20%	16V

A COMMON PARTS LISTING

Note:

The components identified with shading and a critical symbol (⚠) are critical for safety. Replace only with part number specified.

Note:

Les composants identifies per un trame et une marque ⚠ sont critiques pout la securite. Ne les remplacer que par une piece portant le numero specifie.

REF.NO.	PART NO.	DESCRIPTION			REMARK
C281	1-126-959-11	ELECT	0.47MF	20%	50V
C282	1-126-959-11	ELECT	0.47MF	20%	50V
C284	1-104-664-11	ELECT	47MF	20%	25V
C285	1-126-235-11	ELECT	100MF	20%	16V
C286	1-163-251-11	CERAMIC CHIP	100PF	5%	50V
C287	1-126-959-11	ELECT	0.47MF	20%	50V
C288	1-126-960-11	ELECT	1MF	20%	50V
C289	1-126-960-11	ELECT	1MF	20%	50V
C290	1-164-005-11	CERAMIC CHIP	0.47MF		25V
C300		VARIANT (SEE VARIANT PARTS LIST)			
C301	1-163-099-00	CERAMIC CHIP	18PF	5%	50V
C302		VARIANT (SEE VARIANT PARTS LIST)			
C303	1-126-963-11	ELECT	4.7MF	20%	50V
C304	1-163-038-91	CERAMIC CHIP	0.1MF		25V
C305	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C306	1-164-004-11	CERAMIC CHIP	0.1MF	10%	25V
C307		VARIANT (SEE VARIANT PARTS LIST)			
C308	1-126-964-11	ELECT	10MF	20%	50V
C309		VARIANT (SEE VARIANT PARTS LIST)			
C310	1-126-960-11	ELECT	1MF	20%	50V
C311	1-163-021-91	CERAMIC CHIP	0.01MF	10%	50V
C312	1-126-942-61	ELECT	1000MF	20%	25V
C313	1-163-021-91	CERAMIC CHIP	0.01MF	10%	50V
C314		VARIANT (SEE VARIANT PARTS LIST)			
C316	1-163-021-91	CERAMIC CHIP	0.01MF	10%	50V
C317	1-163-021-91	CERAMIC CHIP	0.01MF	10%	50V
C318	1-163-021-91	CERAMIC CHIP	0.01MF	10%	50V
C319	1-126-963-11	ELECT	4.7MF	20%	50V
C320		VARIANT (SEE VARIANT PARTS LIST)			
C321		VARIANT (SEE VARIANT PARTS LIST)			
C323		VARIANT (SEE VARIANT PARTS LIST)			
C324		VARIANT (SEE VARIANT PARTS LIST)			
C330	1-163-003-11	CERAMIC CHIP	330PF	10%	50V
C331		VARIANT (SEE VARIANT PARTS LIST)			
C332		VARIANT (SEE VARIANT PARTS LIST)			
C350		VARIANT (SEE VARIANT PARTS LIST)			
C351		VARIANT (SEE VARIANT PARTS LIST)			
C352		VARIANT (SEE VARIANT PARTS LIST)			
C353		VARIANT (SEE VARIANT PARTS LIST)			
C354		VARIANT (SEE VARIANT PARTS LIST)			
C355		VARIANT (SEE VARIANT PARTS LIST)			
C356		VARIANT (SEE VARIANT PARTS LIST)			
C357		VARIANT (SEE VARIANT PARTS LIST)			
C358		VARIANT (SEE VARIANT PARTS LIST)			
C359		VARIANT (SEE VARIANT PARTS LIST)			
C360		VARIANT (SEE VARIANT PARTS LIST)			
C361		VARIANT (SEE VARIANT PARTS LIST)			
C362		VARIANT (SEE VARIANT PARTS LIST)			
C370	1-163-021-91	CERAMIC CHIP	0.01MF	10%	50V
C371	1-163-021-91	CERAMIC CHIP	0.01MF	10%	50V

REF.NO.	PART NO.	DESCRIPTION			REMARK
C372	1-163-021-91	CERAMIC CHIP	0.01MF	10%	50V
C373	1-163-038-91	CERAMIC CHIP	0.1MF		25V
C374	1-126-935-11	ELECT	470MF	20%	16V
C375	1-163-038-91	CERAMIC CHIP	0.1MF		25V
C376	1-104-664-11	ELECT	47MF	20%	25V
C377	1-126-964-11	ELECT	10MF	20%	50V
C380		VARIANT (SEE VARIANT PARTS LIST)			
C381		VARIANT (SEE VARIANT PARTS LIST)			
C382		VARIANT (SEE VARIANT PARTS LIST)			
C390	1-126-959-11	ELECT	0.47MF	20%	50V
C399	1-126-964-11	ELECT	10MF	20%	50V
C400	1-126-963-11	ELECT	4.7MF	20%	50V
C401	1-126-956-91	ELECT	0.1MF	20%	50V
C402	1-163-017-00	CERAMIC CHIP	0.0047MF	10%	50V
C403	1-126-963-11	ELECT	4.7MF	20%	50V
C404	1-126-963-11	ELECT	4.7MF	20%	50V
C405	1-126-963-11	ELECT	4.7MF	20%	50V
C406	1-126-963-11	ELECT	4.7MF	20%	50V
C407	1-126-964-11	ELECT	10MF	20%	50V
C410	1-126-963-11	ELECT	4.7MF	20%	50V
C411	1-126-956-91	ELECT	0.1MF	20%	50V
C412	1-130-495-00	FILM	0.1MF	5%	50V
C413	1-126-967-11	ELECT	47MF	20%	50V
C414	1-163-017-00	CERAMIC CHIP	0.0047MF	10%	50V
C415	1-126-956-91	ELECT	0.1MF	20%	50V
C416	1-126-963-11	ELECT	4.7MF	20%	50V
C418	1-126-964-11	ELECT	10MF	20%	50V
C420		VARIANT (SEE VARIANT PARTS LIST)			
C501	1-102-112-00	CERAMIC	330PF	10%	50V
C502	1-106-383-00	MYLAR	0.047MF	10%	200V
C503	1-102-212-00	CERAMIC	820PF	10%	500V
C504	1-102-002-00	CERAMIC	680PF	10%	500V
C505 ⚠	1-162-134-11	CERAMIC	470PF	10%	2KV
C507 ⚠	1-119-969-11	MYLAR	14000PF	3%	2KV
C508 ⚠	1-107-364-11	MYLAR	0.01MF	10%	200V
C509 ⚠	1-162-116-00	CERAMIC	680PF	10%	2KV
C510	1-107-649-11	ELECT	2.2MF	20%	250V
C511 ⚠	1-117-673-11	FILM	1.5MF	5%	200V
C512	1-106-395-00	MYLAR	0.15MF	10%	200V
C513	1-106-343-00	MYLAR	0.001MF	10%	100V
C514	1-117-891-11	FILM	0.62MF	5%	200V
C515 ⚠	1-162-116-00	CERAMIC	680PF	10%	2KV
C520 ⚠	1-129-722-00	FILM	0.047MF	5%	630V
C521	1-164-646-11	CERAMIC	2200PF	10%	500V
C524	1-102-244-00	CERAMIC	220PF	10%	500V
C525	1-162-815-11	CERAMIC	47PF	5%	500V
C526	1-126-960-11	ELECT	1MF	20%	50V
C527	1-126-965-11	ELECT	22MF	20%	50V
C528	1-164-695-11	CERAMIC CHIP	0.0022MF	5%	50V
C529	1-164-161-11	CERAMIC CHIP	0.0022MF	10%	50V

Note:

The components identified with shading and a critical symbol (⚠) are critical for safety. Replace only with part number specified.

Note:

Les composants identifies per un trame et une marque ⚠ sont critiques pout la securite. Ne les remplacer que par une piece portant le numero specifie.

REF.NO.	PART NO.	DESCRIPTION			REMARK
C530	1-163-009-11	CERAMIC CHIP	0.001MF	10%	50V
C531	1-106-387-00	MYLAR	0.068MF	10%	200V
C541	1-126-969-11	ELECT	220MF	20%	50V
C542	1-126-967-11	ELECT	47MF	20%	50V
C543	1-136-173-00	FILM	0.47MF	5%	50V
C553	1-107-662-11	ELECT	22MF	20%	250V
C555	1-164-161-11	CERAMIC CHIP	0.0022MF	10%	50V
C562	1-126-941-11	ELECT	470MF	20%	25V
C564	1-126-941-11	ELECT	470MF	20%	25V
C571	1-126-964-11	ELECT	10MF	20%	50V
C573	1-126-963-11	ELECT	4.7MF	20%	50V
C574	1-107-635-11	ELECT	4.7MF	20%	160V
C575	1-163-021-91	CERAMIC CHIP	0.01MF	10%	50V
C576	1-123-024-21	ELECT	33MF		160V
C591	1-137-417-11	MYLAR	0.0047MF	10%	200V
C606 ⚠	1-117-942-11	ELECT(BLOCK)	560MF	20%	250V
C607 ⚠	1-117-942-11	ELECT(BLOCK)	560MF	20%	250V
C610	1-136-173-00	FILM	0.47MF	5%	50V
C611	1-136-173-00	FILM	0.47MF	5%	50V
C612	1-164-735-11	CERAMIC	0.0015MF	10%	500V
C613	1-164-625-11	CERAMIC	680PF	10%	500V
C614 ⚠	1-129-718-00	FILM	0.022MF	5%	630V
C615	1-136-169-00	FILM	0.22MF	5%	50V
C616	1-136-169-00	FILM	0.22MF	5%	50V
C617	1-165-127-11	CERAMIC	470PF	10%	500V
C618	1-165-127-11	CERAMIC	470PF	10%	500V
C619	1-123-024-21	ELECT	33MF		160V
C620	1-126-942-61	ELECT	1000MF	20%	25V
C621		VARIANT (SEE VARIANT PARTS LIST)			
C623	1-137-368-11	FILM	0.0047MF	5%	50V
C624	1-137-417-11	MYLAR	0.0047MF	10%	200V
C626	1-104-665-11	ELECT	100MF	20%	25V
C629	1-104-665-11	ELECT	100MF	20%	25V
C632	1-126-964-11	ELECT	10MF	20%	50V
C650	1-164-645-11	CERAMIC	1000PF	10%	500V
C651	1-164-645-11	CERAMIC	1000PF	10%	500V
C653	1-104-664-11	ELECT	47MF	20%	25V
C654	1-126-382-11	ELECT	100MF	20%	16V
C690	1-126-959-11	ELECT	0.47MF	20%	50V
C691	1-126-941-11	ELECT	470MF	20%	25V
C692	1-104-664-11	ELECT	47MF	20%	25V
C693	1-136-173-00	FILM	0.47MF	5%	50V

FILTER

CF001	1-767-487-11	VIBRATOR, CRYSTAL

REF.NO.	PART NO.	DESCRIPTION	REMARK

CONNECTOR

CN101	1-508-786-00	PIN, CONNECTOR (5MM PITCH) 2P
CN150 *		VARIANT (SEE VARIANT PARTS LIST)
CN203 *	1-560-124-00	PLUG, CONNECTOR (2.5MM) 4P
CN250 *	1-564-514-11	PLUG, CONNECTOR 11P
CN251		VARIANT (SEE VARIANT PARTS LIST)
CN252		VARIANT (SEE VARIANT PARTS LIST)
CN253	1-564-510-11	PLUG, CONNECTOR 7P
CN301	1-564-511-11	PLUG, CONNECTOR 8P
CN302 *		VARIANT (SEE VARIANT PARTS LIST)
CN401	1-564-505-11	PLUG, CONNECTOR 2P
CN402	1-564-505-11	PLUG, CONNECTOR 2P
CN501 *	1-580-798-11	CONNECTOR PIN (DY) 6P
CN502 *	1-564-509-11	PLUG, CONNECTOR 6P
CN601 *	1-580-843-11	PIN, CONNECTOR (POWER) 2P
CN602	1-508-786-00	PIN, CONNECTOR (5MM PITCH) 2P
CN604 *	1-564-506-11	PLUG, CONNECTOR 3P

DIODE

D001	8-719-921-44	DIODE MTZJ-5.1C
D002		VARIANT (SEE VARIANT PARTS LIST)
D003	8-719-991-33	DIODE 1SS133T-77
D004	8-719-991-33	DIODE 1SS133T-77
D005	8-719-109-89	DIODE RD5.6ESB2
D080	8-719-991-33	DIODE 1SS133T-77
D201	8-719-110-17	DIODE RD10ESB2
D202	8-719-110-17	DIODE RD10ESB2
D204	8-719-110-17	DIODE RD10ESB2
D205	8-719-982-22	DIODE MTZJ-30D
D207	8-719-109-66	DIODE RD3.3ESB2
D208		VARIANT (SEE VARIANT PARTS LIST)
D250	8-719-108-12	DIODE RD9.1EW
D251	8-719-108-12	DIODE RD9.1EW
D252	8-719-110-17	DIODE RD10ESB2
D253	8-719-110-17	DIODE RD10ESB2
D254	8-719-110-17	DIODE RD10ESB2
D255	8-719-110-17	DIODE RD10ESB2
D280	8-719-981-99	DIODE MTZJ-3.3
D281	8-719-981-99	DIODE MTZJ-3.3
D302	8-719-921-44	DIODE MTZJ-5.1C
D303	8-719-991-33	DIODE 1SS133T-77
D304	8-719-991-33	DIODE 1SS133T-77
D305	8-719-404-49	DIODE MA111
D306	8-719-404-49	DIODE MA111
D403	8-719-991-33	DIODE 1SS133T-77

A COMMON PARTS LISTING

Note:

The components identified with shading and a critical symbol (⚠) are critical for safety. Replace only with part number specified.

Note:

Les composants identifies per un trame et une marque ⚠ sont critiques pout la securite. Ne les remplacer que par une piece portant le numero specifie.

REF.NO.	PART NO.	DESCRIPTION	REMARK
D501	8-719-945-80	DIODE ERC06-15S	
D502	8-719-908-03	DIODE GP08D	
D503	8-719-908-03	DIODE GP08D	
D520	8-719-067-63	DIODE MDV04-600	
D521	8-719-302-43	DIODE EL1Z	
D522	8-719-991-33	DIODE 1SS133T-77	
D523	8-719-991-33	DIODE 1SS133T-77	
D541	8-719-908-03	DIODE GP08D	
D550	8-719-110-08	DIODE RD8.2ESB2	
D552	8-719-302-43	DIODE EL1Z	
D561	8-719-979-85	DIODE EGP20G	
D562	8-719-979-85	DIODE EGP20G	
D571	8-719-991-33	DIODE 1SS133T-77	
D572	8-719-991-33	DIODE 1SS133T-77	
D573	8-719-110-08	DIODE RD8.2ESB2	
D574 ⚠	8-719-302-43	DIODE EL1Z	
D581	8-719-991-33	DIODE 1SS133T-77	
D601	8-719-510-51	DIODE D3SB60F	
D602	8-719-991-33	DIODE 1SS133T-77	
D604	8-719-060-90	DIODE S2L60F	
D605	8-719-060-90	DIODE S2L60F	
D610 ⚠	8-719-057-52	DIODE EZ0150AV1	
D615	8-719-510-12	DIODE D10SC4M	
D618	8-719-022-97	DIODE D2S4MF	
D620	8-719-022-97	DIODE D2S4MF	
D621	8-719-052-90	DIODE D1NL40-TA2	
D622	8-719-052-90	DIODE D1NL40-TA2	
D650	8-719-109-89	DIODE RD5.6ESB2	
D670	8-719-991-33	DIODE 1SS133T-77	
D690	8-719-991-33	DIODE 1SS133T-77	
D691	8-719-991-33	DIODE 1SS133T-77	

FERRITE BEAD

FB350		VARIANT (SEE VARIANT PARTS LIST)	
FB501	1-410-396-41	FERRITE	
FB521	1-410-397-21	FERRITE	1.1UH
FB522	1-410-397-21	FERRITE	1.1UH
FB601	1-410-396-41	FERRITE	
FB602	1-410-396-41	FERRITE	
FB603	1-412-911-11	FERRITE	
FB605	1-412-911-11	FERRITE	

IC

IC001	8-759-496-18	IC M37273MF-XXXSP	
IC002	8-759-371-21	IC MM1319AFBE	
IC003	8-759-353-44	IC ST24C08FM6TR	
IC010		VARIANT (SEE VARIANT PARTS LIST)	
IC202	8-759-100-96	IC UPC4558G2	
IC203	8-759-534-81	IC MM1313AD/	
IC301		VARIANT (SEE VARIANT PARTS LIST)	
IC302		VARIANT (SEE VARIANT PARTS LIST)	
IC401		VARIANT (SEE VARIANT PARTS LIST)	
IC402	8-752-072-39	IC CXA2021S	
IC521 ⚠	8-759-700-07	IC NJM2903M	
IC541	8-759-980-58	IC TDA8172	
IC601 ⚠	8-729-039-65	TRANSISTOR MX0541B-F	
IC603 ⚠	8-749-012-13	IC DM-58	
IC604	8-759-198-03	IC PQ09RF21	

JACK

J200	1-774-750-21	JACK BLOCK, PIN 2P	
J201	1-774-751-11	TERMINAL BLOCK, S	
J202		VARIANT (SEE VARIANT PARTS LIST)	
J204	1-774-749-11	JACK BLOCK, PIN	

CHIP CONDUCTOR

JR001	1-216-295-91	SHORT	
JR003	1-216-295-91	SHORT	

COIL

L001	1-410-470-11	INDUCTOR	10UH
L002	1-412-032-11	INDUCTOR CHIP	100UH
L003	1-412-032-11	INDUCTOR CHIP	100UH
L101	1-412-029-11	INDUCTOR CHIP	10UH
L150	1-412-032-11	INDUCTOR CHIP	100UH
L151	1-412-029-11	INDUCTOR CHIP	10UH
L301	1-412-031-11	INDUCTOR CHIP	47UH
L302	1-412-029-11	INDUCTOR CHIP	10UH
L350		VARIANT (SEE VARIANT PARTS LIST)	
L351		VARIANT (SEE VARIANT PARTS LIST)	
L501 ⚠	1-411-976-11	COIL, HORIZONTAL LINEARITY	
L502	1-412-552-11	INDUCTOR	2.2MMH
L503	1-406-677-11	INDUCTOR	
L504	1-412-533-21	INDUCTOR	47UH
L520	1-409-955-11	INDUCTOR	
L591 ⚠	1-412-528-61	INDUCTOR	18UH
L601	1-216-389-11	METAL OXIDE	1 5% 3W F

IC LINK

PS201	1-532-984-11	LINK, IC	2A/90V

REF.NO.	PART NO.	DESCRIPTION	REMARK
		TRANSISTOR	
Q001	8-729-216-22	TRANSISTOR 2SA1162-G	
Q002	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q080	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q081	8-729-216-22	TRANSISTOR 2SA1162-G	
Q200	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q201	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q203	8-729-119-76	TRANSISTOR 2SA1175-HFE	
Q204	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q280	8-729-216-22	TRANSISTOR 2SA1162-G	
Q281	8-729-216-22	TRANSISTOR 2SA1162-G	
Q282	8-729-216-22	TRANSISTOR 2SA1162-G	
Q283	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q284	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q285	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q286	8-729-216-22	TRANSISTOR 2SA1162-G	
Q287	8-729-216-22	TRANSISTOR 2SA1162-G	
Q288	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q300	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q302	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q305	8-729-216-22	TRANSISTOR 2SA1162-G	
Q306	8-729-216-22	TRANSISTOR 2SA1162-G	
Q307	8-729-216-22	TRANSISTOR 2SA1162-G	
Q308	8-729-216-22	TRANSISTOR 2SA1162-G	
Q309	8-729-216-22	TRANSISTOR 2SA1162-G	
Q310	8-729-216-22	TRANSISTOR 2SA1162-G	
Q350		VARIANT (SEE VARIANT PARTS LIST)	
Q351		VARIANT (SEE VARIANT PARTS LIST)	
Q352		VARIANT (SEE VARIANT PARTS LIST)	
Q353		VARIANT (SEE VARIANT PARTS LIST)	
Q354		VARIANT (SEE VARIANT PARTS LIST)	
Q355		VARIANT (SEE VARIANT PARTS LIST)	
Q356		VARIANT (SEE VARIANT PARTS LIST)	
Q357		VARIANT (SEE VARIANT PARTS LIST)	
Q358		VARIANT (SEE VARIANT PARTS LIST)	
Q359		VARIANT (SEE VARIANT PARTS LIST)	
Q360		VARIANT (SEE VARIANT PARTS LIST)	
Q390	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q400	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q501	8-729-140-50	TRANSISTOR 2SC3209LK	
Q502	8-729-043-43	TRANSISTOR 2SC5426-01	
Q521	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q522	8-729-809-29	TRANSISTOR 2SC4159-E	
Q550	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q555	8-729-422-27	TRANSISTOR 2SD601A-Q	
Q571	8-729-200-17	TRANSISTOR 2SA1091-O	

REF.NO.	PART NO.	DESCRIPTION	REMARK
Q601	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q604	8-729-119-78	TRANSISTOR 2SC2785-HFE	
Q608		VARIANT (SEE VARIANT PARTS LIST)	
Q650	8-729-111-55	TRANSISTOR 2SD1312-K	
Q670	8-729-140-96	TRANSISTOR 2SD774-34	

RESISTOR

R001	1-216-033-00	RES, CHIP	220	5%	1/10W
R002	1-216-073-00	RES, CHIP	10K	5%	1/10W
R003	1-216-033-00	RES, CHIP	220	5%	1/10W
R004	1-216-073-00	RES, CHIP	10K	5%	1/10W
R005	1-216-025-91	RES, CHIP	100	5%	1/10W
R006	1-216-049-91	RES, CHIP	1K	5%	1/10W
R007	1-216-025-91	RES, CHIP	100	5%	1/10W
R008	1-216-033-00	RES, CHIP	220	5%	1/10W
R010	1-216-033-00	RES, CHIP	220	5%	1/10W
R011	1-216-033-00	RES, CHIP	220	5%	1/10W
R013	1-216-081-00	RES, CHIP	22K	5%	1/10W
R016	1-216-041-00	RES, CHIP	470	5%	1/10W
R017	1-216-113-00	RES, CHIP	470K	5%	1/10W
R018	1-216-049-91	RES, CHIP	1K	5%	1/10W
R019	1-249-425-11	CARBON	4.7K	5%	1/4W
R025	1-249-426-11	CARBON	5.6K	5%	1/4W
R026	1-249-426-11	CARBON	5.6K	5%	1/4W
R027	1-249-426-11	CARBON	5.6K	5%	1/4W
R028	1-216-049-91	RES, CHIP	1K	5%	1/10W
R031	1-216-045-00	RES, CHIP	680	5%	1/10W
R032	1-247-815-91	CARBON	220	5%	1/4W
R033	1-247-815-91	CARBON	220	5%	1/4W
R034	1-216-033-00	RES, CHIP	220	5%	1/10W
R035	1-216-033-00	RES, CHIP	220	5%	1/10W
R038	1-216-049-91	RES, CHIP	1K	5%	1/10W
R040	1-249-413-11	CARBON	470	5%	1/4W
R043	1-249-417-11	CARBON	1K	5%	1/4W
R044	1-247-815-91	CARBON	220	5%	1/4W
R045	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R046	1-247-815-91	CARBON	220	5%	1/4W
R047	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R048	1-216-025-91	RES, CHIP	100	5%	1/10W
R049	1-216-089-91	RES, CHIP	47K	5%	1/10W
R050	1-216-073-00	RES, CHIP	10K	5%	1/10W
R051	1-216-033-00	RES, CHIP	220	5%	1/10W
R054	1-216-073-00	RES, CHIP	10K	5%	1/10W
R056	1-249-425-11	CARBON	4.7K	5%	1/4W
R057	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R058	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R066	1-216-033-00	RES, CHIP	220	5%	1/10W

REF.NO.	PART NO.	DESCRIPTION			REMARK
R067	1-216-033-00	RES, CHIP	220	5%	1/10W
R068	1-247-815-91	CARBON	220	5%	1/4W
R069	1-247-815-91	CARBON	220	5%	1/4W
R070	1-249-425-11	CARBON	4.7K	5%	1/4W
R071	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R073	1-249-425-11	CARBON	4.7K	5%	1/4W
R074	1-216-073-00	RES, CHIP	10K	5%	1/10W
R075	1-216-073-00	RES, CHIP	10K	5%	1/10W
R076	1-216-121-91	RES, CHIP	1M	5%	1/10W
R077	1-216-097-91	RES, CHIP	100K	5%	1/10W
R078	1-247-815-91	CARBON	220	5%	1/4W
R080	1-247-863-91	CARBON	22K	5%	1/4W
R081		VARIANT (SEE VARIANT PARTS LIST)			
R082	1-216-073-00	RES, CHIP	10K	5%	1/10W
R083	1-216-041-00	RES, CHIP	470	5%	1/10W
R084	1-249-429-11	CARBON	10K	5%	1/4W
R085	1-216-049-91	RES, CHIP	1K	5%	1/10W
R086	1-216-045-00	RES, CHIP	680	5%	1/10W
R087	1-216-045-00	RES, CHIP	680	5%	1/10W
R088	1-216-045-00	RES, CHIP	680	5%	1/10W
R091	1-216-073-00	RES, CHIP	10K	5%	1/10W
R092	1-216-073-00	RES, CHIP	10K	5%	1/10W
R096	1-216-045-00	RES, CHIP	680	5%	1/10W
R101	1-216-073-00	RES, CHIP	10K	5%	1/10W
R150	1-216-025-91	RES, CHIP	100	5%	1/10W
R151	1-216-025-91	RES, CHIP	100	5%	1/10W
R200	1-216-022-00	RES, CHIP	75	5%	1/10W
R201	1-216-113-00	RES, CHIP	470K	5%	1/10W
R202	1-216-113-00	RES, CHIP	470K	5%	1/10W
R203	1-216-025-91	RES, CHIP	100	5%	1/10W
R204	1-216-043-91	RES, CHIP	560	5%	1/10W
R205	1-216-043-91	RES, CHIP	560	5%	1/10W
R207	1-216-025-91	RES, CHIP	100	5%	1/10W
R209	1-216-025-91	RES, CHIP	100	5%	1/10W
R210	1-216-073-00	RES, CHIP	10K	5%	1/10W
R211		VARIANT (SEE VARIANT PARTS LIST)			
R212		VARIANT (SEE VARIANT PARTS LIST)			
R213	1-216-057-00	RES, CHIP	2.2K	5%	1/10W
R214	1-216-113-00	RES, CHIP	470K	5%	1/10W
R215	1-216-033-00	RES, CHIP	220	5%	1/10W
R216	1-216-113-00	RES, CHIP	470K	5%	1/10W
R217	1-216-033-00	RES, CHIP	220	5%	1/10W
R218	1-216-067-00	RES, CHIP	5.6K	5%	1/10W
R219	1-216-073-00	RES, CHIP	10K	5%	1/10W
R220	1-216-073-00	RES, CHIP	10K	5%	1/10W
R221	1-216-073-00	RES, CHIP	10K	5%	1/10W
R222	1-216-067-00	RES, CHIP	5.6K	5%	1/10W
R223	1-216-073-00	RES, CHIP	10K	5%	1/10W

REF.NO.	PART NO.	DESCRIPTION			REMARK
R224	1-216-073-00	RES, CHIP	10K	5%	1/10W
R225	1-216-073-00	RES, CHIP	10K	5%	1/10W
R226	1-249-425-11	CARBON	4.7K	5%	1/4W
R227	1-216-097-91	RES, CHIP	100K	5%	1/10W
R228	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R229	1-216-097-91	RES, CHIP	100K	5%	1/10W
R230	1-216-073-00	RES, CHIP	10K	5%	1/10W
R231		VARIANT (SEE VARIANT PARTS LIST)			
R232		VARIANT (SEE VARIANT PARTS LIST)			
R233		VARIANT (SEE VARIANT PARTS LIST)			
R234		VARIANT (SEE VARIANT PARTS LIST)			
R235		VARIANT (SEE VARIANT PARTS LIST)			
R236		VARIANT (SEE VARIANT PARTS LIST)			
R237		VARIANT (SEE VARIANT PARTS LIST)			
R238		VARIANT (SEE VARIANT PARTS LIST)			
R241	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R242	1-216-083-00	RES, CHIP	27K	5%	1/10W
R243	1-216-689-11	RES, CHIP	39K	5%	1/10W
R244	1-216-049-91	RES, CHIP	1K	5%	1/10W
R245	1-216-049-91	RES, CHIP	1K	5%	1/10W
R246	1-249-425-11	CARBON	4.7K	5%	1/4W
R247	1-249-425-11	CARBON	4.7K	5%	1/4W
R248	1-216-049-91	RES, CHIP	1K	5%	1/10W
R249	1-216-025-91	RES, CHIP	100	5%	1/10W
R250	1-216-033-00	RES, CHIP	220	5%	1/10W
R251	1-216-025-91	RES, CHIP	100	5%	1/10W
R252	1-216-033-00	RES, CHIP	220	5%	1/10W
R253	1-215-899-11	METAL OXIDE	15K	5%	2W F
R254	1-216-033-00	RES, CHIP	220	5%	1/10W
R256	1-216-033-00	RES, CHIP	220	5%	1/10W
R257	1-249-429-11	CARBON	10K	5%	1/4W
R258	1-216-033-00	RES, CHIP	220	5%	1/10W
R259	1-216-033-00	RES, CHIP	220	5%	1/10W
R260	1-216-025-91	RES, CHIP	100	5%	1/10W
R261	1-216-025-91	RES, CHIP	100	5%	1/10W
R262	1-216-025-91	RES, CHIP	100	5%	1/10W
R263	1-247-815-91	CARBON	220	5%	1/4W
R264	1-247-815-91	CARBON	220	5%	1/4W
R265	1-249-425-11	CARBON	4.7K	5%	1/4W
R266	1-249-425-11	CARBON	4.7K	5%	1/4W
R267	1-216-022-00	RES, CHIP	75	5%	1/10W
R268	1-216-022-00	RES, CHIP	75	5%	1/10W
R269	1-216-049-91	RES, CHIP	1K	5%	1/10W
R270	1-216-022-00	RES, CHIP	75	5%	1/10W
R271	1-216-113-00	RES, CHIP	470K	5%	1/10W
R272	1-216-113-00	RES, CHIP	470K	5%	1/10W
R273	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R274	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R276	1-216-295-91	SHORT			

REF.NO.	PART NO.	DESCRIPTION			REMARK
R277	1-216-295-91	SHORT			
R278		VARIANT (SEE VARIANT PARTS LIST)			
R279	1-249-425-11	CARBON	4.7K	5%	1/4W
R280	1-247-807-31	CARBON	100	5%	1/4W
R281	1-216-025-91	RES, CHIP	100	5%	1/10W
R282	1-216-025-91	RES, CHIP	100	5%	1/10W
R284	1-260-091-11	CARBON	220	5%	1/2W
R285	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R286	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R287	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R288	1-249-425-11	CARBON	4.7K	5%	1/4W
R289	1-216-021-00	RES, CHIP	68	5%	1/10W
R290	1-216-113-00	RES, CHIP	470K	5%	1/10W
R291	1-216-113-00	RES, CHIP	470K	5%	1/10W
R292	1-216-113-00	RES, CHIP	470K	5%	1/10W
R293	1-216-069-00	RES, CHIP	6.8K	5%	1/10W
R294	1-249-427-11	CARBON	6.8K	5%	1/4W
R295	1-249-427-11	CARBON	6.8K	5%	1/4W
R296	1-249-437-11	CARBON	47K	5%	1/4W
R297	1-216-043-91	RES, CHIP	560	5%	1/10W
R298	1-216-041-00	RES, CHIP	470	5%	1/10W
R299	1-249-425-11	CARBON	4.7K	5%	1/4W
R300		VARIANT (SEE VARIANT PARTS LIST)			
R301	1-216-295-91	SHORT			
R302		VARIANT (SEE VARIANT PARTS LIST)			
R304	1-216-073-00	RES, CHIP	10K	5%	1/10W
R305	1-216-033-00	RES, CHIP	220	5%	1/10W
R306	1-208-806-11	RES, CHIP	10K	0.50%	1/10W
R307		VARIANT (SEE VARIANT PARTS LIST)			
R308		VARIANT (SEE VARIANT PARTS LIST)			
R310	1-216-049-91	RES, CHIP	1K	5%	1/10W
R312	1-216-033-00	RES, CHIP	220	5%	1/10W
R313	1-216-033-00	RES, CHIP	220	5%	1/10W
R314	1-216-033-00	RES, CHIP	220	5%	1/10W
R315	1-216-033-00	RES, CHIP	220	5%	1/10W
R316	1-247-807-31	CARBON	100	5%	1/4W
R317		VARIANT (SEE VARIANT PARTS LIST)			
R318	1-216-025-91	RES, CHIP	100	5%	1/10W
R319	1-216-073-00	RES, CHIP	10K	5%	1/10W
R320		VARIANT (SEE VARIANT PARTS LIST)			
R321		VARIANT (SEE VARIANT PARTS LIST)			
R322		VARIANT (SEE VARIANT PARTS LIST)			
R323	1-216-037-00	RES, CHIP	330	5%	1/10W
R324	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R328	1-247-807-31	CARBON	100	5%	1/4W
R329	1-216-025-91	RES, CHIP	100	5%	1/10W
R330	1-216-025-91	RES, CHIP	100	5%	1/10W

REF.NO.	PART NO.	DESCRIPTION			REMARK
R331	1-216-025-91	RES, CHIP	100	5%	1/10W
R333	1-216-049-91	RES, CHIP	1K	5%	1/10W
R334		VARIANT (SEE VARIANT PARTS LIST)			
R335	1-216-057-00	RES, CHIP	2.2K	5%	1/10W
R336	1-216-057-00	RES, CHIP	2.2K	5%	1/10W
R337	1-216-057-00	RES, CHIP	2.2K	5%	1/10W
R340	1-249-417-11	CARBON	1K	5%	1/4W
R341	1-216-073-00	RES, CHIP	10K	5%	1/10W
R342	1-216-069-00	RES, CHIP	6.8K	5%	1/10W
R343		VARIANT (SEE VARIANT PARTS LIST)			
R344	1-216-295-91	SHORT			
R345		VARIANT (SEE VARIANT PARTS LIST)			
R346		VARIANT (SEE VARIANT PARTS LIST)			
R347	1-216-049-91	RES, CHIP	1K	5%	1/10W
R350		VARIANT (SEE VARIANT PARTS LIST)			
R351		VARIANT (SEE VARIANT PARTS LIST)			
R352		VARIANT (SEE VARIANT PARTS LIST)			
R353		VARIANT (SEE VARIANT PARTS LIST)			
R354		VARIANT (SEE VARIANT PARTS LIST)			
R355		VARIANT (SEE VARIANT PARTS LIST)			
R356	1-216-059-00	RES, CHIP	2.7K	5%	1/10W
R357		VARIANT (SEE VARIANT PARTS LIST)			
R358		VARIANT (SEE VARIANT PARTS LIST)			
R359		VARIANT (SEE VARIANT PARTS LIST)			
R361		VARIANT (SEE VARIANT PARTS LIST)			
R362		VARIANT (SEE VARIANT PARTS LIST)			
R363		VARIANT (SEE VARIANT PARTS LIST)			
R364		VARIANT (SEE VARIANT PARTS LIST)			
R365		VARIANT (SEE VARIANT PARTS LIST)			
R366		VARIANT (SEE VARIANT PARTS LIST)			
R367		VARIANT (SEE VARIANT PARTS LIST)			
R368		VARIANT (SEE VARIANT PARTS LIST)			
R369		VARIANT (SEE VARIANT PARTS LIST)			
R370	1-216-033-00	RES, CHIP	220	5%	1/10W
R372		VARIANT (SEE VARIANT PARTS LIST)			
R373		VARIANT (SEE VARIANT PARTS LIST)			
R374		VARIANT (SEE VARIANT PARTS LIST)			
R375		VARIANT (SEE VARIANT PARTS LIST)			
R376		VARIANT (SEE VARIANT PARTS LIST)			
R377		VARIANT (SEE VARIANT PARTS LIST)			
R378		VARIANT (SEE VARIANT PARTS LIST)			
R379		VARIANT (SEE VARIANT PARTS LIST)			
R380		VARIANT (SEE VARIANT PARTS LIST)			
R381		VARIANT (SEE VARIANT PARTS LIST)			
R387	1-216-067-00	RES, CHIP	5.6K	5%	1/10W
R388	8-719-976-99	DIODE DTZ5.1B			
R390	1-247-807-31	CARBON	100	5%	1/4W
R391		VARIANT (SEE VARIANT PARTS LIST)			

A COMMON PARTS LISTING

Note:

The components identified with shading and a critical symbol (⚠) are critical for safety. Replace only with part number specified.

Note:

The components identified by ⋈ in this manual have been carefully factory-selected for each set in order to satisfy regulations regarding X-ray radiation. Should replacement be required, replace only with the value originally used.

REF.NO.	PART NO.	DESCRIPTION			REMARK
R392	1-216-049-91	RES, CHIP	1K	5%	1/10W
R399	1-216-295-91	SHORT			
R400	1-247-863-91	CARBON	22K	5%	1/4W
R401	1-216-097-91	RES, CHIP	100K	5%	1/10W
R402	1-216-121-91	RES, CHIP	1M	5%	1/10W
R403	1-247-815-91	CARBON	220	5%	1/4W
R404	1-247-815-91	CARBON	220	5%	1/4W
R405	1-216-097-91	RES, CHIP	100	5%	1/10W
R406	1-216-025-91	RES, CHIP	100	5%	1/10W
R432	1-249-429-11	CARBON	10K	5%	1/4W
R501	1-247-843-11	CARBON	3.3K	5%	1/4W
R502	1-215-892-11	METAL OXIDE	1K	5%	2W F
R503	1-249-426-11	CARBON	5.6K	5%	1/4W F
R504	1-216-349-00	METAL OXIDE	1	5%	1W F
R505	1-249-401-11	CARBON	47	5%	1/4W
R506	1-215-860-11	METAL OXIDE	33	5%	1W F
R507	1-260-097-11	CARBON	680	5%	1/2W
R508	1-216-449-11	METAL OXIDE	56	5%	2W F
R509	1-216-481-11	METAL OXIDE	1.2K	5%	3W F
R510	1-216-449-11	METAL OXIDE	56	5%	2W F
R520	1-215-861-00	METAL OXIDE	47	5%	1W F
R521	1-249-411-11	CARBON	330	5%	1/4W
R522	1-249-415-11	CARBON	680	5%	1/4W
R523	1-216-073-00	RES, CHIP	10K	5%	1/10W
R524	1-249-429-11	CARBON	10K	5%	1/4W
R525	1-249-427-11	CARBON	6.8K	5%	1/4W
R526	1-216-081-00	RES, CHIP	22K	5%	1/10W
R527	1-216-079-00	RES, CHIP	18K	5%	1/10W
R528	1-249-421-11	CARBON	2.2K	5%	1/4W
R529	1-216-101-00	RES, CHIP	150K	5%	1/10W
R530	1-216-089-91	RES, CHIP	47K	5%	1/10W
R532	1-215-437-00	METAL	4.7K	1%	1/4W
R533 ⚠	1-215-461-00	METAL	47K	1%	1/4W
R534	1-215-451-00	METAL	18K	1%	1/4W
R535	1-249-441-11	CARBON	100K	5%	1/4W
R541	1-249-430-11	CARBON	12K	5%	1/4W
R542	1-249-429-11	CARBON	10K	5%	1/4W
R543	1-249-429-11	CARBON	10K	5%	1/4W
R544	1-216-351-00	METAL OXIDE	1.5	5%	1W F
R546	1-215-890-11	METAL OXIDE	470	5%	2W F
R547	1-249-385-11	CARBON	2.2	5%	1/4W F
R548	1-249-430-11	CARBON	12K	5%	1/4W
R549	1-249-429-11	CARBON	10K	5%	1/4W
R550	1-249-421-11	CARBON	2.2K	5%	1/4W
R551	1-249-413-11	CARBON	470	5%	1/4W
R552	1-247-887-00	CARBON	220K	5%	1/4W
R553	1-260-312-11	CARBON	47	5%	1/2W
R554		VARIANT (SEE VARIANT PARTS LIST)			
R555		VARIANT (SEE VARIANT PARTS LIST)			
R556		VARIANT (SEE VARIANT PARTS LIST)			
R557		VARIANT (SEE VARIANT PARTS LIST)			
R558		VARIANT (SEE VARIANT PARTS LIST)			
R559		VARIANT (SEE VARIANT PARTS LIST)			
R561 ⚠	1-249-377-11	CARBON	0.47	5%	1/4W F
R562 ⚠	1-260-288-11	CARBON	0.47	5%	1/2W
R571	1-216-365-00	METAL OXIDE	0.47	5%	2W F
R572	1-249-429-11	CARBON	10K	5%	1/4W
R573	1-247-895-91	CARBON	470K	5%	1/4W
R574	1-249-416-11	CARBON	820	5%	1/4W F
R575	1-247-895-91	CARBON	470K	5%	1/4W
R576	1-249-441-11	CARBON	100K	5%	1/4W
R578	1-215-902-11	METAL OXIDE	47K	5%	1W F
R579	1-208-777-11	RES, CHIP	620	0.50%	1/10W
R580	1-249-440-11	CARBON	82K	5%	1/4W
R581	1-249-427-11	CARBON	6.8K	5%	1/4W
R582	1-208-806-11	RES, CHIP	10K	0.50%	1/10W
R583	1-208-830-11	RES, CHIP	100K	0.50%	1/10W
⋈ R584	1-208-822-11	RES, CHIP	47K	0.50%	1/10W
R585	1-216-073-00	RES, CHIP	10K	5%	1/10W
R586	1-216-073-00	RES, CHIP	10K	5%	1/10W
R587	1-216-073-00	RES, CHIP	10K	5%	1/10W
R591	1-215-882-00	METAL OXIDE	22	5%	2W F
R600		VARIANT (SEE VARIANT PARTS LIST)			
R601		VARIANT (SEE VARIANT PARTS LIST)			
R602		VARIANT (SEE VARIANT PARTS LIST)			
R603		VARIANT (SEE VARIANT PARTS LIST)			
R604	1-260-131-11	CARBON	470K	5%	1/2W
R605	1-260-131-11	CARBON	470K	5%	1/2W
R606	1-220-926-11	FUSIBLE	0.47	10%	1/2W F
R608	1-220-388-21	METAL OXIDE	68K	5%	1W F
R609	1-220-388-21	METAL OXIDE	68K	5%	1W F
R610	1-220-388-21	METAL OXIDE	68K	5%	1W F
R611	1-220-388-21	METAL OXIDE	68K	5%	1W F
R612	1-216-349-00	METAL OXIDE	1	5%	1W F
R613	1-216-349-00	METAL OXIDE	1	5%	1W F
R618	1-212-857-00	FUSIBLE	10	5%	1/4W F
R622	1-249-393-11	CARBON	10	5%	1/4W
R623	1-249-441-11	CARBON	100K	5%	1/4W
R624	1-249-421-11	CARBON	2.2K	5%	1/4W
R630	1-249-421-11	CARBON	2.2K	5%	1/4W
R631	1-249-429-11	CARBON	10K	5%	1/4W
R641	1-216-389-11	METAL OXIDE	1	5%	3W F
R642	1-249-437-11	CARBON	47K	5%	1/4W
R647	1-249-429-11	CARBON	10K	5%	1/4W
R650	1-249-415-11	CARBON	680	5%	1/4W
R670	1-249-421-11	CARBON	2.2K	5%	1/4W

Note:

The components identified with shading and a critical symbol (⚠) are critical for safety. Replace only with part number specified.

Note:

Les composants identifies per un trame et une marque ⚠ sont critiques pout la securite. Ne les remplacer que par une piece portant le numero specifie.

REF.NO.	PART NO.	DESCRIPTION				REMARK
R671	1-249-417-11	CARBON	1K	5%	1/4W	
R673	1-249-421-11	CARBON	2.2K	5%	1/4W	
R674	1-247-863-91	CARBON	22K	5%	1/4W	
R675	1-215-859-00	METAL OXIDE	22	5%	1W	F
R690	1-216-355-11	METAL OXIDE	3.3	5%	1W	F
R691	1-249-395-11	CARBON	15	5%	1/4W	
R692	1-249-395-11	CARBON	15	5%	1/4W	
R699	1-249-413-11	CARBON	470	5%	1/4W	F
		RELAY				
RY601 ⚠	1-755-018-11	RELAY				
RY602 ⚠	1-755-266-11	RELAY, AC POWER				
		SWITCH				
SW501	1-572-707-11	SWITCH, LEVER				
		TRANSFORMER				
T501	1-437-210-11	TRANSFORMER, HORIZONTAL DRIVE				
T502	1-431-731-11	TRANSFORMER, MODULATION				
T504 ⚠	1-453-268-11	FLYBACK TRANSFORMER ASSY, NX-4005//X4J4				
T602 ⚠	1-429-992-11	TRANSFORMER, CONVERTER (PRT)				
T603 ⚠	1-431-837-11	TRANSFORMER, CONVERTER (PIT)				
		THERMISTOR				
THP601		VARIANT (SEE VARIANT PARTS LIST)				
		TUNER				
TU101⚠	8-598-431-00	TUNER, FSS BTF-WA411				
		VARISTOR				
VDR602	1-809-267-41	VARISTOR ERZV10D471				
		CRYSTAL				
X300		VARIANT (SEE VARIANT PARTS LIST)				
X301	1-567-505-11	OSCILLATOR, CRYSTAL				
X302		VARIANT (SEE VARIANT PARTS LIST)				

REF.NO.	PART NO.	DESCRIPTION	REMARK

A BOARD VARIANT PARTS LIST

The parts on this page belong to the following model(s) only:

KV-27V40/29VL40

A BOARD VARIANT LIST: 27V40/29VL40

REF.NO.	PART NO.	DESCRIPTION			REMARK
		CAPACITOR			
C307	1-126-964-11	ELECT	10MF	20%	50V
C309	1-163-021-91	CERAMIC	0.01MF	10%	50V
C314	1-163-003-11	CERAMIC	330PF	10%	50V
C323	1-163-243-11	CERAMIC	47PF	5%	50V
C324	1-163-251-11	CERAMIC	100PF	5%	50V
C331	1-163-005-11	CERAMIC	470PF	10%	50V
C332	1-163-009-11	CERAMIC	0.001MF	10%	50V
C350	1-163-021-91	CERAMIC	0.01MF	10%	50V
C351	1-126-964-11	ELECT	10MF	20%	50V
C352	1-163-021-91	CERAMIC	0.01MF	10%	50V
C353	1-163-038-91	CERAMIC	0.1MF		25V
C354	1-163-038-91	CERAMIC	0.1MF		25V
C355	1-164-222-11	CERAMIC	0.22MF		25V
C356	1-163-038-91	CERAMIC	0.1MF		25V
C357	1-163-021-91	CERAMIC	0.01MF	10%	50V
C358	1-104-664-11	ELECT	47MF	20%	25V
C359	1-163-021-91	CERAMIC	0.01MF	10%	50V
C360	1-163-021-91	CERAMIC	0.01MF	10%	50V
C361	1-163-037-11	CERAMIC	0.022MF	10%	50V
C362	1-126-964-11	ELECT	10MF	20%	50V
C380	1-163-021-91	CERAMIC	0.01MF	10%	50V
C381	1-163-021-91	CERAMIC	0.01MF	10%	50V
C382	1-163-021-91	CERAMIC	0.01MF	10%	50V
C420	1-126-964-11	ELECT	10MF	20%	50V
C621	1-126-941-11	ELECT	470MF	20%	25V
		CONNECTOR			
CN252	1-564-506-11	PLUG, CONNECTOR 3P			
		DIODE			
D002	1-810-039-31	LED UNIT			
		IC			
IC010	8-759-710-86	IC NJM2233BM			
IC301	8-752-083-09	IC CXA2061S			
IC302	8-752-385-80	iIC CXD2073S			
IC401	8-759-490-17	IC TDA7057AQ/N2			

REF.NO.	PART NO.	DESCRIPTION			REMARK
		COIL			
L350	1-412-029-11	INDUCTOR	10UH		
L351	1-412-029-11	INDUCTOR	10UH		
		TRANSISTOR			
Q350	8-729-216-22	TRANSISTOR 2SA1162-G			
Q351	8-729-422-27	TRANSISTOR 2SD601A-Q			
Q352	8-729-216-22	TRANSISTOR 2SA1162-G			
Q353	8-729-216-22	TRANSISTOR 2SA1162-G			
Q354	8-729-216-22	TRANSISTOR 2SA1162-G			
Q355	8-729-422-27	TRANSISTOR 2SD601A-Q			
Q356	8-729-216-22	TRANSISTOR 2SA1162-G			
Q357	8-729-216-22	TRANSISTOR 2SA1162-G			
Q358	8-729-422-27	TRANSISTOR 2SD601A-Q			
Q359	8-729-216-22	TRANSISTOR 2SA1162-G			
Q360	8-729-216-22	TRANSISTOR 2SA1162-G			
Q608	8-729-119-76	TRANSISTOR 2SA1175-HFE			
		RESISTOR			
R231	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R232	1-249-427-11	CARBON	6.8K	5%	1/4W
R233	1-249-427-11	CARBON	6.8K	5%	1/4W
R234	1-247-843-11	CARBON	3.3K	5%	1/4W
R235	1-247-843-11	CARBON	3.3K	5%	1/4W
R236	1-249-425-11	CARBON	4.7K	5%	1/4W
R237	1-249-427-11	CARBON	6.8K	5%	1/4W
R238	1-249-427-11	CARBON	6.8K	5%	1/4W
R307	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R308	1-216-025-91	RES, CHIP	100	5%	1/10W
R317	1-216-025-91	RES, CHIP	100	5%	1/10W
R318	1-216-025-91	RES, CHIP	100	5%	1/10W
R320	1-216-025-91	RES, CHIP	100	5%	1/10W
R321	1-216-025-91	RES, CHIP	100	5%	1/10W
R322	1-216-025-91	RES, CHIP	100	5%	1/10W
R334	1-216-025-91	RES, CHIP	100	5%	1/10W
R343	1-216-129-00	RES, CHIP	2.2M	5%	1/10W
R345	1-216-129-00	RES, CHIP	2.2M	5%	1/10W
R346	1-216-129-00	RES, CHIP	2.2M	5%	1/10W
R350	1-208-766-11	RES, CHIP	220	0.50%	1/10W
R351	1-208-766-11	RES, CHIP	220	0.50%	1/10W
R352	1-208-794-11	RES, CHIP	3.3K	0.50%	1/10W
R353	1-216-295-91	SHORT			

Note:

The components identified with shading and a critical symbol (⚠) are critical for safety. Replace only with part number specified.

Note:

Les composants identifies per un trame et une marque ⚠ sont critiques pout la securite. Ne les remplacer que par une piece portant le numero specifie.

The parts on this page belong to the following model(s) only:

KV-27V40/29VL40

REF.NO.	PART NO.	DESCRIPTION		REMARK	
R354	1-208-794-11	RES, CHIP	3.3K	0.50%	1/10W
R355	1-216-295-91	SHORT			
R357	1-216-091-00	RES, CHIP	56K	5%	1/10W
R358	1-216-043-91	RES, CHIP	560	5%	1/10W
R359	1-216-057-00	RES, CHIP	2.2K	5%	1/10W
R361	1-216-049-91	RES, CHIP	1K	5%	1/10W
R362	1-216-043-91	RES, CHIP	560	5%	1/10W
R363	1-216-037-00	RES, CHIP	330	5%	1/10W
R364	1-216-025-91	RES, CHIP	100	5%	1/10W
R365	1-216-025-91	RES, CHIP	100	5%	1/10W
R366	1-216-053-00	RES, CHIP	1.5K	5%	1/10W
R367	1-216-057-00	RES, CHIP	2.2K	5%	1/10W
R368	1-216-033-00	RES, CHIP	220	5%	1/10W
R369	1-216-041-00	RES, CHIP	470	5%	1/10W
R372	1-216-035-00	RES, CHIP	270	5%	1/10W
R373	1-216-025-91	RES, CHIP	100	5%	1/10W
R374	1-216-025-91	RES, CHIP	100	5%	1/10W
R375	1-216-053-00	RES, CHIP	1.5K	5%	1/10W
R376	1-216-049-91	RES, CHIP	1K	5%	1/10W
R377	1-216-049-91	RES, CHIP	1K	5%	1/10W
R378	1-216-041-00	RES, CHIP	470	5%	1/10W
R379	1-216-049-91	RES, CHIP	1K	5%	1/10W
R380	1-208-790-11	RES, CHIP	2.2K	0.50%	1/10W
R381	1-216-053-00	RES, CHIP	1.5K	5%	1/10W
R391	1-216-053-00	RES, CHIP	1.5K	5%	1/10W
R554	1-216-101-00	RES, CHIP	150K	5%	1/10W
R555	1-216-093-00	RES, CHIP	68K	5%	1/10W
R556	1-216-081-00	RES, CHIP	22K	5%	1/10W
R557	1-249-431-11	CARBON	15K	5%	1/4W
R558	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R559	1-216-121-91	RES, CHIP	1M	5%	1/10W
R601 ⚠	1-219-513-11	CARBON	4.7M	5%	1/2W
R602 ⚠	1-205-998-11	CEMENTED	1	5%	10W
R603 ⚠	1-205-998-11	CEMENTED	1	5%	10W

THERMISTOR

THP601	1-809-539-11	THERMISTOR	POSITIVE		

REF.NO.	PART NO.	DESCRIPTION	REMARK

A BOARD VARIANT PARTS LIST

The parts on this page belong to the following model(s) only:

KV-27V65/29VL95

A BOARD VARIANT LIST: KV-27V65/29VL95

REF.NO.	PART NO.	DESCRIPTION			REMARK
		CAPACITOR			
C200	1-126-959-11	ELECT	0.47MF	20%	50V
C252	1-126-959-11	ELECT	0.47MF	20%	50V
C307	1-126-964-11	ELECT	10MF	20%	50V
C309	1-163-021-91	CERAMIC	0.01MF	10%	50V
C314	1-163-003-11	CERAMIC	330PF	10%	50V
C320	1-126-959-11	ELECT	0.47MF	20%	50V
C321	1-163-133-00	CERAMIC	470PF	5%	50V
C323	1-163-243-11	CERAMIC	47PF	5%	50V
C324	1-163-251-11	CERAMIC	100PF	5%	50V
C331	1-163-005-11	CERAMIC	470PF	10%	50V
C332	1-163-009-11	CERAMIC	0.001MF	10%	50V
C350	1-163-021-91	CERAMIC	0.01MF	10%	50V
C351	1-126-964-11	ELECT	10MF	20%	50V
C352	1-163-021-91	CERAMIC	0.01MF	10%	50V
C353	1-163-038-91	CERAMIC	0.1MF		25V
C354	1-163-038-91	CERAMIC	0.1MF		25V
C355	1-164-222-11	CERAMIC	0.22MF		25V
C356	1-163-038-91	CERAMIC	0.1MF		25V
C357	1-163-021-91	CERAMIC	0.01MF	10%	50V
C358	1-104-664-11	ELECT	47MF	20%	25V
C359	1-163-021-91	CERAMIC	0.01MF	10%	50V
C360	1-163-021-91	CERAMIC	0.01MF	10%	50V
C361	1-163-037-11	CERAMIC	0.022MF	10%	50V
C362	1-126-964-11	ELECT	10MF	20%	50V
C420	1-126-960-11	ELECT	1MF	20%	50V
C621	1-126-943-11	ELECT	2200MF	20%	25V
		CONNECTOR			
CN150	1-564-596-11	PLUG, CONNECTOR 15P			
CN251	1-564-510-11	PLUG, CONNECTOR 7P			
CN302	1-691-616-11	CONNECTOR, BOARD TO BOARD			
		DIODE			
D208	8-719-982-96	DIODE MTZJ-T-77-2.2A			
		FERRITE BEAD			
FB350	1-216-295-91	SHORT			

REF.NO.	PART NO.	DESCRIPTION			REMARK
		IC			
IC010	8-759-710-85	IC NJM2233BD			
IC301	8-752-083-09	IC CXA2061S			
IC302	8-752-385-80	IC CXD2073S			
		JACK			
J202	1-774-749-11	JACK BLOCK, PIN			
		COIL			
L350	1-412-029-11	INDUCTOR	10UH		
L351	1-412-031-11	INDUCTOR	47UH		
		TRANSISTOR			
Q350	8-729-216-22	TRANSISTOR 2SA1162-G			
Q351	8-729-422-27	TRANSISTOR 2SD601A-Q			
Q352	8-729-216-22	TRANSISTOR 2SA1162-G			
Q353	8-729-216-22	TRANSISTOR 2SA1162-G			
Q354	8-729-216-22	TRANSISTOR 2SA1162-G			
Q355	8-729-422-27	TRANSISTOR 2SD601A-Q			
Q356	8-729-216-22	TRANSISTOR 2SA1162-G			
Q357	8-729-216-22	TRANSISTOR 2SA1162-G			
Q358	8-729-422-27	TRANSISTOR 2SD601A-Q			
Q359	8-729-216-22	TRANSISTOR 2SA1162-G			
Q360	8-729-216-22	TRANSISTOR 2SA1162-G			
Q608	8-729-026-41	TRANSISTOR 2SA933AS-QRT			
		RESISTOR			
R231	1-216-057-00	RES, CHIP	2.2K	5%	1/10W
R234	1-249-421-11	CARBON	2.2K	5%	1/4W
R235	1-249-421-11	CARBON	2.2K	5%	1/4W
R236	1-249-421-11	CARBON	2.2K	5%	1/4W
R237	1-249-425-11	CARBON	4.7K	5%	1/4W
R238	1-249-425-11	CARBON	4.7K	5%	1/4W
R278	1-216-295-91	SHORT			
R307	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R308	1-216-025-91	RES, CHIP	100	5%	1/10W
R317	1-216-025-91	RES, CHIP	100	5%	1/10W
R318	1-216-025-91	RES, CHIP	100	5%	1/10W
R320	1-247-807-31	CARBON	100	5%	1/4W
R321	1-216-025-91	RES, CHIP	100	5%	1/10W
R322	1-216-025-91	RES, CHIP	100	5%	1/10W

Note:

The components identified with shading and a critical symbol (⚠) are critical for safety. Replace only with part number specified.

Note:

Les composants identifies per un trame et une marque ⚠ sont critiques pout la securite. Ne les remplacer que par une piece portant le numero specifie.

A BOARD VARIANT PARTS LIST

The parts on this page belong to the following model(s) only:

KV-27V65/29VL95

REF.NO.	PART NO.	DESCRIPTION			REMARK
R334	1-216-025-91	RES, CHIP	100	5%	1/10W
R343	1-216-129-00	RES, CHIP	2.2M	5%	1/10W
R345	1-216-129-00	RES, CHIP	2.2M	5%	1/10W
R346	1-216-129-00	RES, CHIP	2.2M	5%	1/10W
R350	1-208-766-11	RES, CHIP	220	0.50%	1/10W
R351	1-208-766-11	RES, CHIP	220	0.50%	1/10W
R352	1-208-794-11	RES, CHIP	3.3K	0.50%	1/10W
R353	1-216-295-91	SHORT			
R354	1-208-794-11	RES, CHIP	3.3K	0.50%	1/10W
R355	1-216-295-91	SHORT			
R357	1-216-091-00	RES, CHIP	56K	5%	1/10W
R358	1-216-043-91	RES, CHIP	560	5%	1/10W
R359	1-216-057-00	RES, CHIP	2.2K	5%	1/10W
R361	1-216-049-91	RES, CHIP	1K	5%	1/10W
R362	1-216-043-91	RES, CHIP	560	5%	1/10W
R363	1-216-037-00	RES, CHIP	330	5%	1/10W
R364	1-216-025-91	RES, CHIP	100	5%	1/10W
R365	1-216-025-91	RES, CHIP	100	5%	1/10W
R366	1-216-053-00	RES, CHIP	1.5K	5%	1/10W
R367	1-216-057-00	RES, CHIP	2.2K	5%	1/10W
R368	1-216-033-00	RES, CHIP	220	5%	1/10W
R369	1-216-041-00	RES, CHIP	470	5%	1/10W
R372	1-216-035-00	RES, CHIP	270	5%	1/10W
R373	1-216-025-91	RES, CHIP	100	5%	1/10W
R374	1-216-025-91	RES, CHIP	100	5%	1/10W
R375	1-216-053-00	RES, CHIP	1.5K	5%	1/10W
R376	1-216-049-91	RES, CHIP	1K	5%	1/10W
R377	1-216-049-91	RES, CHIP	1K	5%	1/10W
R378	1-216-041-00	RES, CHIP	470	5%	1/10W
R379	1-216-049-91	RES, CHIP	1K	5%	1/10W
R380	1-208-790-11	RES, CHIP	2.2K	0.50%	1/10W
R381	1-216-053-00	RES, CHIP	1.5K	5%	1/10W
R391	1-216-073-00	RES, CHIP	10K	5%	1/10W
R554	1-216-101-00	RES, CHIP	150K	5%	1/10W
R555	1-216-093-00	RES, CHIP	68K	5%	1/10W
R556	1-216-081-00	RES, CHIP	22K	5%	1/10W
R557	1-249-431-11	CARBON	15K	5%	1/4W
R558	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R559	1-216-121-91	RES, CHIP	1M	5%	1/10W
R601 ⚠	1-219-513-11	CARBON	4.7M	5%	1/2W
R602 ⚠	1-205-998-11	CEMENTED	1	5%	10W
R603 ⚠	1-205-998-11	CEMENTED	1	5%	10W

REF.NO.	PART NO.	DESCRIPTION	REMARK
	THERMISTOR		
THP601	1-809-539-11	THERMISTOR POSITIVE	

A BOARD VARIANT PARTS LIST

The parts on this page belong to the following model(s) only:

KV-29VL65A

Note:

The components identified with shading and a critical symbol (⚠) are critical for safety. Replace only with part number specified.

Note:

Les composants identifies per un trame et une marque ⚠ sont critiques pout la securite. Ne les remplacer que par une piece portant le numero specifie.

A BOARD VARIANT LIST: KV-29VL65A

CAPACITOR

REF.NO.	PART NO.	DESCRIPTION			REMARK
C200	1-126-959-11	ELECT	0.47MF	20%	50V
C252	1-126-959-11	ELECT	0.47MF	20%	50V
C300	1-163-099-00	CERAMIC	18PF	5%	50V
C302	1-163-099-00	CERAMIC	18PF	5%	50V
C309	1-163-017-00	CERAMIC	0.0047MF	10%	50V
C320	1-126-957-11	ELECT	0.22MF	20%	50V
C321	1-163-259-91	CERAMIC	220PF	5%	50V
C420	1-126-960-11	ELECT	1MF	20%	50V
C621	1-126-943-11	ELECT	2200MF	20%	25V

CONNECTOR

CN150	1-564-596-11	PLUG, CONNECTOR 15P
CN251	1-564-510-11	PLUG, CONNECTOR 7P
CN302	1-691-616-11	CONNECTOR, BOARD TO BOARD

DIODE

D208	8-719-982-96	DIODE MTZJ-T-77-2.2A

IC

IC010	8-759-710-85	IC NJM2233BD
IC301	8-752-082-35	IC CXA2060AS

JACK

J202	1-774-749-11	JACK BLOCK, PIN

TRANSISTOR

Q288	8-729-422-27	TRANSISTOR 2SD601A-QRS-TX
Q608	8-729-119-76	TRANSISTOR 2SA1175-HFE

RESISTOR

REF.NO.	PART NO.	DESCRIPTION			REMARK
R081	1-249-413-11	CARBON	470	5%	1/4W
R231	1-216-057-00	RES, CHIP	2.2K	5%	1/10W
R234	1-249-421-11	CARBON	2.2K	5%	1/4W
R235	1-249-421-11	CARBON	2.2K	5%	1/4W
R236	1-249-421-11	CARBON	2.2K	5%	1/4W
R237	1-249-425-11	CARBON	4.7K	5%	1/4W
R238	1-249-425-11	CARBON	4.7K	5%	1/4W
R278	1-216-295-91	SHORT	0		
R300	1-216-295-91	SHORT	0		
R302	1-216-295-91	SHORT	0		
R307	1-216-075-00	RES, CHIP	12K	5%	1/10W
R391	1-216-073-00	RES, CHIP	10K	5%	1/10W
R600 ⚠	1-247-289-00	CARBON	8.2M	5%	1W
R602 ⚠	1-205-997-11	CEMENTED	2.2	5%	10W
R603 ⚠	1-205-997-11	CEMENTED	2.2	5%	10W

THERMISTOR

THP601	1-809-827-11	THERMISTOR POSITIVE

CRYSTAL

X300	1-579-972-11	VIBRATOR, CRYSTAL
X302	1-579-973-11	VIBRATOR, CRYSTAL

The parts on this page belong to the following model(s) only:

KV-27V45/29VL85

A BOARD VARIANT LIST: KV-27V45/29VL85

REF.NO.	PART NO.	DESCRIPTION			REMARK
CAPACITOR					
C200	1-126-959-11	ELECT	0.47MF	20%	50V
C307	1-126-964-11	ELECT	10MF	20%	50V
C309	1-163-021-91	CERAMIC	0.01MF	10%	50V
C314	1-163-003-11	CERAMIC	330PF	10%	50V
C320	1-126-959-11	ELECT	0.47MF	20%	50V
C321	1-163-133-00	CERAMIC	470PF	5%	50V
C323	1-163-243-11	CERAMIC	47PF	5%	50V
C324	1-163-251-11	CERAMIC	100PF	5%	50V
C331	1-163-005-11	CERAMIC	470PF	10%	50V
C332	1-163-009-11	CERAMIC	0.001MF	10%	50V
C350	1-163-021-91	CERAMIC	0.01MF	10%	50V
C351	1-126-964-11	ELECT	10MF	20%	50V
C352	1-163-021-91	CERAMIC	0.01MF	10%	50V
C353	1-163-038-91	CERAMIC	0.1MF		25V
C354	1-163-038-91	CERAMIC	0.1MF		25V
C355	1-164-222-11	CERAMIC	0.22MF		25V
C356	1-163-038-91	CERAMIC	0.1MF		25V
C357	1-163-021-91	CERAMIC	0.01MF	10%	50V
C358	1-104-664-11	ELECT	47MF	20%	25V
C359	1-163-021-91	CERAMIC	0.01MF	10%	50V
C360	1-163-021-91	CERAMIC	0.01MF	10%	50V
C361	1-163-037-11	CERAMIC	0.022MF	10%	50V
C362	1-126-964-11	ELECT	10MF	20%	50V
C420	1-126-960-11	ELECT	1MF	20%	50V
C621	1-126-941-11	ELECT	470MF	20%	25V
CONNECTOR					
CN302	1-691-616-11	CONNECTOR, BOARD TO BOARD			
DIODE					
D208	8-719-110-17	DIODE RD10ESB2			
FERRITE BEAD					
FB350	1-216-295-91	SHORT			
IC					
IC301	8-752-083-09	IC CXA2061S			
IC302	8-752-385-80	IC CXD2073S			
IC401	8-759-490-17	IC TDA7057AQ/N2			

REF.NO.	PART NO.	DESCRIPTION			REMARK
JACK					
J202	1-774-749-11	JACK BLOCK, PIN			
COIL					
L350	1-412-029-11	INDUCTOR	10UH		
L351	1-412-031-11	INDUCTOR	47UH		
TRANSISTOR					
Q350	8-729-216-22	TRANSISTOR 2SA1162-G			
Q351	8-729-422-27	TRANSISTOR 2SD601A-Q			
Q352	8-729-216-22	TRANSISTOR 2SA1162-G			
Q353	8-729-216-22	TRANSISTOR 2SA1162-G			
Q354	8-729-216-22	TRANSISTOR 2SA1162-G			
Q355	8-729-422-27	TRANSISTOR 2SD601A-Q			
Q356	8-729-216-22	TRANSISTOR 2SA1162-G			
Q357	8-729-216-22	TRANSISTOR 2SA1162-G			
Q358	8-729-422-27	TRANSISTOR 2SD601A-Q			
Q359	8-729-216-22	TRANSISTOR 2SA1162-G			
Q360	8-729-216-22	TRANSISTOR 2SA1162-G			
Q608	8-729-026-41	TRANSISTOR 2SA933AS-QRT			
RESISTOR					
R211	1-247-807-31	CARBON	100	5%	1/4W
R212	1-249-425-11	CARBON	4.7K	5%	1/4W
R231	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R234	1-247-843-11	CARBON	3.3K	5%	1/4W
R235	1-247-843-11	CARBON	3.3K	5%	1/4W
R236	1-249-425-11	CARBON	4.7K	5%	1/4W
R237	1-249-427-11	CARBON	6.8K	5%	1/4W
R238	1-249-427-11	CARBON	6.8K	5%	1/4W
R307	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R308	1-216-025-91	RES, CHIP	100	5%	1/10W
R317	1-216-025-91	RES, CHIP	100	5%	1/10W
R318	1-216-025-91	RES, CHIP	100	5%	1/10W
R320	1-247-807-31	CARBON	100	5%	1/4W
R321	1-216-025-91	RES, CHIP	100	5%	1/10W
R322	1-216-025-91	RES, CHIP	100	5%	1/10W
R334	1-216-025-91	RES, CHIP	100	5%	1/10W
R343	1-216-129-00	RES, CHIP	2.2M	5%	1/10W
R345	1-216-129-00	RES, CHIP	2.2M	5%	1/10W
R346	1-216-129-00	RES, CHIP	2.2M	5%	1/10W
R350	1-208-766-11	RES, CHIP	220	0.50%	1/10W

A BOARD VARIANT PARTS LIST

The parts on this page belong to the following model(s) only:

KV-27V45/29VL85

Note:

The components identified with shading and a critical symbol (⚠) are critical for safety. Replace only with part number specified.

Note:

Les composants identifies per un trame et une marque ⚠ sont critiques pout la securite. Ne les remplacer que par une piece portant le numero specifie.

REF.NO.	PART NO.	DESCRIPTION		REMARK	
R351	1-208-766-11	RES, CHIP	220	0.50%	1/10W
R352	1-208-794-11	RES, CHIP	3.3K	0.50%	1/10W
R353	1-216-295-91	SHORT			
R354	1-208-794-11	RES, CHIP	3.3K	0.50%	1/10W
R355	1-216-295-91	SHORT			
R357	1-216-091-00	RES, CHIP	56K	5%	1/10W
R358	1-216-043-91	RES, CHIP	560	5%	1/10W
R359	1-216-057-00	RES, CHIP	2.2K	5%	1/10W
R361	1-216-049-91	RES, CHIP	1K	5%	1/10W
R362	1-216-043-91	RES, CHIP	560	5%	1/10W
R363	1-216-037-00	RES, CHIP	330	5%	1/10W
R364	1-216-025-91	RES, CHIP	100	5%	1/10W
R365	1-216-025-91	RES, CHIP	100	5%	1/10W
R366	1-216-053-00	RES, CHIP	1.5K	5%	1/10W
R367	1-216-057-00	RES, CHIP	2.2K	5%	1/10W
R368	1-216-033-00	RES, CHIP	220	5%	1/10W
R369	1-216-041-00	RES, CHIP	470	5%	1/10W
R372	1-216-035-00	RES, CHIP	270	5%	1/10W
R373	1-216-025-91	RES, CHIP	100	5%	1/10W
R374	1-216-025-91	RES, CHIP	100	5%	1/10W
R375	1-216-053-00	RES, CHIP	1.5K	5%	1/10W
R376	1-216-049-91	RES, CHIP	1K	5%	1/10W
R377	1-216-049-91	RES, CHIP	1K	5%	1/10W
R378	1-216-041-00	RES, CHIP	470	5%	1/10W
R379	1-216-049-91	RES, CHIP	1K	5%	1/10W
R380	1-208-790-11	RES, CHIP	2.2K	0.50%	1/10W
R381	1-216-053-00	RES, CHIP	1.5K	5%	1/10W
R391	1-216-073-00	RES, CHIP	10K	5%	1/10W
R554	1-216-101-00	RES, CHIP	150K	5%	1/10W
R555	1-216-093-00	RES, CHIP	68K	5%	1/10W
R556	1-216-081-00	RES, CHIP	22K	5%	1/10W
R557	1-249-431-11	CARBON	15K	5%	1/4W
R558	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R559	1-216-121-91	RES, CHIP	1M	5%	1/10W
R601 ⚠	1-219-513-11	CARBON	4.7M	5%	1/2W
R602 ⚠	1-205-998-11	CEMENTED	1	5%	10W
R603 ⚠	1-205-998-11	CEMENTED	1	5%	10W

THERMISTOR

THP601	1-809-539-11	THERMISTOR POSITIVE			

REF.NO.	PART NO.	DESCRIPTION	REMARK

The parts on this page belong to the following model(s) only:

KV-29VL65C

A BOARD VARIANT LIST: KV-29VL65C

REF.NO.	PART NO.	DESCRIPTION			REMARK
		CAPACITOR			
C200	1-126-959-11	ELECT	0.47MF	20%	50V
C252	1-126-959-11	ELECT	0.47MF	20%	50V
C307	1-126-964-11	ELECT	10MF	20%	50V
C309	1-163-021-91	CERAMIC	0.01MF	10%	50V
C314	1-163-003-11	CERAMIC	330PF	10%	50V
C320	1-126-959-11	ELECT	0.47MF	20%	50V
C321	1-163-133-00	CERAMIC	470PF	5%	50V
C323	1-163-243-11	CERAMIC	47PF	5%	50V
C324	1-163-251-11	CERAMIC	100PF	5%	50V
C331	1-163-005-11	CERAMIC	470PF	10%	50V
C332	1-163-009-11	CERAMIC	0.001MF	10%	50V
C350	1-163-021-91	CERAMIC	0.01MF	10%	50V
C351	1-126-964-11	ELECT	10MF	20%	50V
C352	1-163-021-91	CERAMIC	0.01MF	10%	50V
C353	1-163-038-91	CERAMIC	0.1MF		25V
C354	1-163-038-91	CERAMIC	0.1MF		25V
C355	1-164-222-11	CERAMIC	0.22MF		25V
C356	1-163-038-91	CERAMIC	0.1MF		25V
C357	1-163-021-91	CERAMIC	0.01MF	10%	50V
C358	1-104-664-11	ELECT	47MF	20%	25V
C359	1-163-021-91	CERAMIC	0.01MF	10%	50V
C360	1-163-021-91	CERAMIC	0.01MF	10%	50V
C361	1-163-037-11	CERAMIC	0.022MF	10%	50V
C362	1-126-964-11	ELECT	10MF	20%	50V
C420	1-126-960-11	ELECT	1MF	20%	50V
C621	1-126-943-11	ELECT	2200MF	20%	25V
		CONNECTOR			
CN150	1-564-596-11	PLUG, CONNECTOR		15P	
CN251	1-564-510-11	PLUG, CONNECTOR		7P	
CN302	1-691-616-11	CONNECTOR, BOARD TO BOARD			
		DIODE			
D002	1-810-039-11	LED UNIT			
D208	8-719-982-96	DIODE MTZJ-T-77-2.2A			
		FERRITE BEAD			
FB350	1-216-295-91	SHORT			

REF.NO.	PART NO.	DESCRIPTION			REMARK
		IC			
IC010	8-759-710-85	IC NJM2233BD			
IC301	8-752-083-09	IC CXA2061S			
IC302	8-752-385-80	IC CXD2073S			
		JACK			
J202	1-774-749-11	JACK BLOCK, PIN			
		COIL			
L350	1-412-029-11	INDUCTOR	10UH		
L351	1-412-031-11	INDUCTOR	47UH		
		TRANSISTOR			
Q350	8-729-216-22	TRANSISTOR 2SA1162-G			
Q351	8-729-422-27	TRANSISTOR 2SD601A-Q			
Q352	8-729-216-22	TRANSISTOR 2SA1162-G			
Q353	8-729-216-22	TRANSISTOR 2SA1162-G			
Q354	8-729-216-22	TRANSISTOR 2SA1162-G			
Q355	8-729-422-27	TRANSISTOR 2SD601A-Q			
Q356	8-729-216-22	TRANSISTOR 2SA1162-G			
Q357	8-729-216-22	TRANSISTOR 2SA1162-G			
Q358	8-729-422-27	TRANSISTOR 2SD601A-Q			
Q359	8-729-216-22	TRANSISTOR 2SA1162-G			
Q360	8-729-216-22	TRANSISTOR 2SA1162-G			
Q608	8-729-119-76	TRANSISTOR 2SA1175-HFE			
		RESISTOR			
R231	1-216-057-00	RES, CHIP	2.2K	5%	1/10W
R234	1-249-421-11	CARBON	2.2K	5%	1/4W
R235	1-249-421-11	CARBON	2.2K	5%	1/4W
R236	1-249-421-11	CARBON	2.2K	5%	1/4W
R237	1-249-425-11	CARBON	4.7K	5%	1/4W
R238	1-249-425-11	CARBON	4.7K	5%	1/4W
R307	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R308	1-216-025-91	RES, CHIP	100	5%	1/10W
R317	1-216-025-91	RES, CHIP	100	5%	1/10W
R318	1-216-025-91	RES, CHIP	100	5%	1/10W

A BOARD VARIANT PARTS LIST

The parts on this page belong to the following model(s) only:

KV-29VL65C

REF.NO.	PART NO.	DESCRIPTION			REMARK
R320	1-247-807-31	CARBON	100	5%	1/4W
R321	1-216-025-91	RES, CHIP	100	5%	1/10W
R322	1-216-025-91	RES, CHIP	100	5%	1/10W
R334	1-216-025-91	RES, CHIP	100	5%	1/10W
R343	1-216-129-00	RES, CHIP	2.2M	5%	1/10W
R345	1-216-129-00	RES, CHIP	2.2M	5%	1/10W
R346	1-216-129-00	RES, CHIP	2.2M	5%	1/10W
R350	1-208-766-11	RES, CHIP	220	0.50%	1/10W
R351	1-208-766-11	RES, CHIP	220	0.50%	1/10W
R352	1-208-794-11	RES, CHIP	3.3K	0.50%	1/10W
R353	1-216-295-91	SHORT	0		
R354	1-208-794-11	RES, CHIP	3.3K	0.50%	1/10W
R355	1-216-295-91	SHORT	0		
R357	1-216-091-00	RES, CHIP	56K	5%	1/10W
R358	1-216-043-91	RES, CHIP	560	5%	1/10W
R359	1-216-057-00	RES, CHIP	2.2K	5%	1/10W
R361	1-216-049-91	RES, CHIP	1K	5%	1/10W
R362	1-216-043-91	RES, CHIP	560	5%	1/10W
R363	1-216-037-00	RES, CHIP	330	5%	1/10W
R364	1-216-025-91	RES, CHIP	100	5%	1/10W
R365	1-216-025-91	RES, CHIP	100	5%	1/10W
R366	1-216-053-00	RES, CHIP	1.5K	5%	1/10W
R367	1-216-057-00	RES, CHIP	2.2K	5%	1/10W
R368	1-216-033-00	RES, CHIP	220	5%	1/10W
R369	1-216-041-00	RES, CHIP	470	5%	1/10W
R372	1-216-035-00	RES, CHIP	270	5%	1/10W
R373	1-216-025-91	RES, CHIP	100	5%	1/10W
R374	1-216-025-91	RES, CHIP	100	5%	1/10W
R375	1-216-053-00	RES, CHIP	1.5K	5%	1/10W
R376	1-216-049-91	RES, CHIP	1K	5%	1/10W
R377	1-216-049-91	RES, CHIP	1K	5%	1/10W
R378	1-216-041-00	RES, CHIP	470	5%	1/10W
R379	1-216-049-91	RES, CHIP	1K	5%	1/10W
R380	1-208-790-11	RES, CHIP	2.2K	0.50%	1/10W
R381	1-216-053-00	RES, CHIP	1.5K	5%	1/10W
R391	1-216-053-00	RES, CHIP	1.5K	5%	1/10W
R554	1-216-101-00	RES, CHIP	150K	5%	1/10W
R555	1-216-093-00	RES, CHIP	68K	5%	1/10W
R556	1-216-081-00	RES, CHIP	22K	5%	1/10W
R557	1-249-431-11	CARBON	15K	5%	1/4W
R558	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R559	1-216-121-91	RES, CHIP	1M	5%	1/10W
R600 ⚠	1-247-289-00	CARBON	8.2M	5%	1W
R602 ⚠	1-205-997-11	CEMENTED	2.2	5%	10W
R603 ⚠	1-205-997-11	CEMENTED	2.2	5%	10W

REF.NO.	PART NO.	DESCRIPTION	REMARK
	THERMISTOR		
THP601	1-809-827-11	THERMISTOR POSITIVE	

Note:

The components identified with shading and a critical symbol (⚠) are critical for safety. Replace only with part number specified.

Note:

Les composants identifies per un trame et une marque ⚠ sont critiques pout la securite. Ne les remplacer que par une piece portant le numero specifie.

CV

* A-1331-838-A CV BOARD, COMPLETE
(All Models)

4-382-854-11 SCREW (M3X10), P, SW (+)

CAPACITOR

REF.NO.	PART NO.	DESCRIPTION			
C944	1-102-129-00	CERAMIC	0.01MF	10%	50V
C945	1-102-110-00	CERAMIC	220PF	10%	50V
C946	1-104-665-11	ELECT	100MF	20%	25V
C949	1-161-830-00	CERAMIC	0.0047MF		500V
C950	1-126-941-11	ELECT	470MF	20%	25V
C951	1-107-637-11	ELECT	22MF	20%	160V
C952	1-104-999-11	MYLAR	0.1MF	10%	200V
C953	1-106-383-00	MYLAR	0.047MF	10%	200V
C954	1-137-364-11	FILM	0.001MF	5%	50V
C955	1-107-667-11	ELECT	2.2MF	20%	160V
C956	1-137-364-11	FILM	0.001MF	5%	50V
C957	1-106-383-00	MYLAR	0.047MF	10%	200V
C958	1-126-941-11	ELECT	470MF	20%	25V
C1701	1-107-652-11	ELECT	10MF	20%	250V
C1702	1-162-114-00	CERAMIC	0.0047MF		2KV
C1705	1-107-667-11	ELECT	2.2MF	20%	160V
C1941	1-126-941-11	ELECT	470MF	20%	25V
C1948	1-102-121-00	CERAMIC	0.0022MF	10%	50V

CONNECTOR

CN942 *	1-564-507-11	PLUG, CONNECTOR	4P
CN1701*	1-564-509-11	PLUG, CONNECTOR	6P
CN1702	1-564-511-11	PLUG, CONNECTOR	8P
CN1703	1-695-915-11	TAB (CONTACT)	
CN1704	1-695-915-11	TAB (CONTACT)	

DIODE

D941	8-719-991-33	DIODE 1SS133T-77
D946	8-719-110-88	DIODE RD39ESB2
D947	8-719-110-88	DIODE RD39ESB2
D1704	8-719-901-83	DIODE 1SS83
D1705	8-719-901-83	DIODE 1SS83
D1706	8-719-901-83	DIODE 1SS83
D1708	8-719-302-43	DIODE EL1Z

IC

IC1701	8-759-535-08	IC TDA6108Q

JACK

J1701 ⚠	1-251-688-11	SOCKET, CRT

COIL

L1701	1-408-613-31	INDUCTOR	68UH

TRANSISTOR

Q943	8-729-119-78	TRANSISTOR 2SC2785-HFE
Q944	8-729-119-78	TRANSISTOR 2SC2785-HFE
Q945	8-729-119-78	TRANSISTOR 2SC2785-HFE
Q946	8-729-017-05	TRANSISTOR 2SA1837
Q947	8-729-017-06	TRANSISTOR 2SC4793
Q965	8-729-119-78	TRANSISTOR 2SC2785-HFE
Q966	8-729-119-76	TRANSISTOR 2SA1175-HFE

RESISTOR

R943	1-247-807-31	CARBON	100	5%	1/4W
R948	1-249-417-11	CARBON	1K	5%	1/4W
R949	1-249-421-11	CARBON	2.2K	5%	1/4W
R950	1-249-417-11	CARBON	1K	5%	1/4W
R951	1-249-417-11	CARBON	1K	5%	1/4W
R952	1-249-413-11	CARBON	470	5%	1/4W
R953	1-249-403-11	CARBON	68	5%	1/4W
R954	1-247-815-91	CARBON	220	5%	1/4W
R955	1-249-416-11	CARBON	820	5%	1/4W
R956	1-247-807-31	CARBON	100	5%	1/4W
R957	1-249-429-11	CARBON	10K	5%	1/4W
R958	1-247-807-31	CARBON	100	5%	1/4W
R959	1-249-403-11	CARBON	68	5%	1/4W
R977	1-249-397-11	CARBON	22	5%	1/4W F
R979	1-249-401-11	CARBON	47	5%	1/4W
R1706	1-260-099-11	CARBON	1K	5%	1/2W
R1707	1-260-099-11	CARBON	1K	5%	1/2W
R1708	1-260-099-11	CARBON	1K	5%	1/2W
R1709	1-260-087-11	CARBON	100	5%	1/2W
R1710	1-260-123-11	CARBON	100K	5%	1/2W
R1711	1-216-373-11	METAL OXIDE	2.2	5%	2W F
R1712	1-216-375-00	METAL OXIDE	3.3	5%	2W F
R1713	1-247-807-31	CARBON	100	5%	1/4W
R1714	1-247-807-31	CARBON	100	5%	1/4W
R1715	1-247-807-31	CARBON	100	5%	1/4W
R1720	1-260-132-11	CARBON	560K	5%	1/2W
R1941	1-260-312-11	CARBON	47	5%	1/2W

CV E COMPLETE PARTS LISTING

Note:

The components identified with shading and a critical symbol (⚠) are critical for safety. Replace only with part number specified.

Note:

Les composants identifies per un trame et une marque ⚠ sont critiques pout la securite. Ne les remplacer que par une piece portant le numero specifie.

REF.NO.	PART NO.	DESCRIPTION			REMARK
R1942	1-249-385-11	CARBON	2.2	5%	1/4W F
R1943	1-249-414-11	CARBON	560	5%	1/4W F
R1944	1-249-432-11	CARBON	18K	5%	1/4W
R1945	1-215-914-11	METAL OXIDE	330	5%	3W F
R1946	1-249-417-11	CARBON	1K	5%	1/4W F
R1947	1-249-432-11	CARBON	18K	5%	1/4W
R1948	1-249-414-11	CARBON	560	5%	1/4W
R1949	1-249-385-11	CARBON	2.2	5%	1/4W F
R1950	1-249-401-11	CARBON	47	5%	1/4W F

E

* A-1343-525-A E BOARD, COMPLETE
(KV-27V40/29VL40/27V65/29VL95/27V45/29VL85 only)

* A-1343-526-A E BOARD, COMPLETE
(KV-29VL65A/29VL65C only)

1-533-223-11 HOLDER, FUSE

CAPACITOR

C5000	1-107-662-11	ELECT	22MF	20%	250V
C5002	1-107-662-11	ELECT	22MF	20%	250V
C5003	1-136-601-11	FILM	0.01MF	10%	630V
C5004	1-130-471-00	MYLAR	0.001MF	5%	50V
C5006	1-130-471-00	MYLAR	0.001MF	5%	50V
C5007	1-130-467-00	MYLAR	470PF	5%	50V
C5008	1-130-471-00	MYLAR	0.001MF	5%	50V
C5009	1-126-965-11	ELECT	22MF	20%	50V
C5010	1-115-804-91	ELECT	120MF	20%	35V
C5020 ⚠	1-113-941-11	CERAMIC	0.0047MF	20%	125V
C5050 ⚠	1-136-311-51	FILM	0.47MF	20%	125V
	(KV-27V40/29VL40/27V65/29VL95/27V45/29VL85 only)				
C5050 ⚠	1-136-311-61	FILM	0.47MF	20%	300V
	(KV-29VL65A/29VL65C only)				

CONNECTOR

CN5000 *	1-580-843-11	PIN, CONNECTOR (POWER)	2P
CN5001 *	1-564-506-11	PLUG, CONNECTOR	3P
CN5002 *	1-580-843-11	PIN, CONNECTOR (POWER)	2P
CN5003	1-508-786-00	PIN, CONNECTOR (5MM PITCH)	2P

DIODE

D5001	8-719-911-55	DIODE U05G
D5002	8-719-911-55	DIODE U05G
D5003	8-719-055-18	DIODE ERA22-08TP3
D5004	8-719-991-33	DIODE 1SS133T-77
D5005	8-719-991-33	DIODE 1SS133T-77
D5006	8-719-109-93	DIODE RD6.2ESB2
D5007	8-719-510-48	DIODE D1N20R
D5008	8-719-510-26	DIODE D1NL20-TA

FUSE

F5050 ⚠	1-532-506-51	FUSE	6.3A/250V	
	(KV-29VL65A/29VL65C only)			
F5050 ⚠	1-576-193-11	FUSE	6.3A/125V	
	(KV-27V40/29VL40/27V65/29VL95/27V45/29VL85 only)			

TRANSISTOR

Q5001	8-729-044-30	TRANSISTOR 2SK2845-LB102
Q5002	8-729-119-78	TRANSISTOR 2SC2785-HFE

RESISTOR

R5001	1-249-389-11	CARBON	4.7	5%	1/4W F
R5002	1-215-485-00	METAL	470K	1%	1/4W
R5003	1-240-205-91	CARBON	22M	5%	1/2W
R5007	1-249-421-11	CARBON	2.2K	5%	1/4W
R5008	1-249-429-11	CARBON	10K	5%	1/4W
R5009	1-249-437-11	CARBON	47K	5%	1/4W
R5010	1-249-415-11	CARBON	680	5%	1/4W
R5011	1-260-302-51	CARBON	6.8	5%	1/2W
R5012	1-249-417-11	CARBON	1K	5%	1/4W
R5013	1-249-415-11	CARBON	680	5%	1/4W
R5050	1-219-512-11	CARBON	2.2M	5%	1/2W

TRANSFORMER

T5001 ⚠	1-431-852-11	TRANSFORMER, CONVERTER (SRT)
T5050 ⚠	1-426-717-11	TRANSFORMER, LINE FILTER (LFT)

VARISTOR

VDR5050	1-801-074-41	VARISTOR ERZV10D271
	(KV-27V40/29VL40/27V65/29VL95/27V45/29VL85 only)	
VDR5050	1-809-267-41	VARISTOR ERZV10D471
	(KV-29VL65A/29VL65C only)	

HV

* A-1372-479-A HV BOARD, COMPLETE
(All Models)

CAPACITOR

REF.NO.	PART NO.	DESCRIPTION			
C1407	1-136-173-00	FILM	0.47MF	5%	50V
C1408	1-136-287-11	FILM	0.0047MF	5%	50V
C1409	1-136-173-00	FILM	0.47MF	5%	50V
C1410	1-126-964-11	ELECT	10MF	20%	50V
C1411	1-126-964-11	ELECT	10MF	20%	50V
C1412	1-126-964-11	ELECT	10MF	20%	50V
C1413	1-126-964-11	ELECT	10MF	20%	50V
C1415	1-126-968-11	ELECT	100MF	20%	50V
C1416	1-106-375-12	MYLAR	0.022MF	20%	200V
C1417	1-137-414-11	FILM	0.0047MF	10%	100V
C1418	1-102-114-00	CERAMIC	470PF	10%	50V
C1419	1-130-495-00	FILM	0.1MF	5%	50V
C1420	1-137-371-11	FILM	0.015MF	5%	50V
C1421	1-102-121-00	CERAMIC	0.0022MF	10%	50V
C1422	1-137-414-11	FILM	0.0047MF	10%	100V
C1423	1-136-173-00	FILM	0.47MF	5%	50V
C1424	1-130-495-00	FILM	0.1MF	5%	50V
C1425	1-137-370-11	FILM	0.01MF	5%	50V
C1426	1-130-495-00	FILM	0.1MF	5%	50V
C1427	1-137-370-11	FILM	0.01MF	5%	50V
C1428	1-130-495-00	FILM	0.1MF	5%	50V
C1429	1-137-370-11	FILM	0.01MF	5%	50V
C1430	1-126-964-11	ELECT	10MF	20%	50V
C1431	1-136-287-11	FILM	0.0047MF	5%	50V
C1432	1-126-964-11	ELECT	10MF	20%	50V
C1433	1-106-355-12	MYLAR	0.0033MF	10%	100V
C1434	1-106-379-12	MYLAR	0.033MF	10%	100V
C1435	1-126-964-11	ELECT	10MF	20%	50V
C1436	1-126-964-11	ELECT	10MF	20%	50V
C1437	1-126-964-11	ELECT	10MF	20%	50V
C1438	1-106-355-12	MYLAR	0.0033MF	10%	100V
C1439	1-106-379-12	MYLAR	0.033MF	10%	100V
C1440	1-126-964-11	ELECT	10MF	20%	50V
C1443	1-126-964-11	ELECT	10MF	20%	50V
C2068	1-104-665-11	ELECT	100MF	20%	25V
C2234	1-126-960-11	ELECT	1MF	20%	50V
C2235	1-126-960-11	ELECT	1MF	20%	50V
C2236	1-106-343-00	MYLAR	0.001MF	10%	200V

CONNECTOR

REF.NO.	PART NO.	DESCRIPTION
CN1405	1-564-510-11	PLUG, CONNECTOR 7P
CN1406*	1-564-506-11	PLUG, CONNECTOR 3P
CN2001*	1-564-506-11	PLUG, CONNECTOR 3P
CN2200*	1-564-514-11	PLUG, CONNECTOR 11P

DIODE

REF.NO.	PART NO.	DESCRIPTION
D2001	8-719-110-17	DIODE RD10ESB2
D2006	1-810-039-11	LED UNIT
D2235	8-719-110-17	DIODE RD10ESB2
D2236	8-719-110-17	DIODE RD10ESB2

IC

REF.NO.	PART NO.	DESCRIPTION
IC1403	8-759-496-03	IC NJM2178L
IC1404	8-759-496-02	IC NJM2150D
IC2003	8-742-014-11	HYB IC SBX1981-51

JACK

REF.NO.	PART NO.	DESCRIPTION	
J2231	1-691-110-11	JACK, PIN	3P

RESISTOR

REF.NO.	PART NO.	DESCRIPTION			
R1403	1-215-437-00	METAL	4.7K	1%	1/4W
R1404	1-249-419-11	CARBON	1.5K	5%	1/4W
R1405	1-249-424-11	CARBON	3.9K	5%	1/4W
R1406	1-249-437-11	CARBON	47K	5%	1/4W
R1407	1-249-435-11	CARBON	33K	5%	1/4W
R1408	1-215-469-00	METAL	100K	1%	1/4W
R1409	1-249-417-11	CARBON	1K	5%	1/4W
R1410	1-215-461-00	METAL	47K	1%	1/4W
R1411	1-249-429-11	CARBON	10K	5%	1/4W
R1412	1-249-429-11	CARBON	10K	5%	1/4W
R1413	1-249-429-11	CARBON	10K	5%	1/4W
R1414	1-249-429-11	CARBON	10K	5%	1/4W
R1415	1-249-429-11	CARBON	10K	5%	1/4W
R1416	1-249-429-11	CARBON	10K	5%	1/4W
R1417	1-249-429-11	CARBON	10K	5%	1/4W
R1419	1-249-441-11	CARBON	100K	5%	1/4W
R1420	1-249-429-11	CARBON	10K	5%	1/4W

Note:

The components identified with shading and a critical symbol (⚠) are critical for safety. Replace only with part number specified.

Note:

Les composants identifies per un trame et une marque ⚠ sont critiques pout la securite. Ne les remplacer que par une piece portant le numero specifie.

REF.NO.	PART NO.	DESCRIPTION			REMARK
R1421	1-249-441-11	CARBON	100K	5%	1/4W
R1422	1-249-429-11	CARBON	10K	5%	1/4W
R1423	1-249-441-11	CARBON	100K	5%	1/4W
R1424	1-249-429-11	CARBON	10K	5%	1/4W
R1425	1-249-429-11	CARBON	10K	5%	1/4W
R1426	1-249-429-11	CARBON	10K	5%	1/4W
R1427	1-249-429-11	CARBON	10K	5%	1/4W
R1428	1-249-429-11	CARBON	10K	5%	1/4W
R1429	1-249-429-11	CARBON	10K	5%	1/4W
R1430	1-215-461-00	METAL	47K	1%	1/4W
R1431	1-249-429-11	CARBON	10K	5%	1/4W
R1432	1-249-429-11	CARBON	10K	5%	1/4W
R1433	1-249-429-11	CARBON	10K	5%	1/4W
R1434	1-215-445-00	METAL	10K	1%	1/4W
R1435	1-249-431-11	CARBON	15K	5%	1/4W
R1440	1-249-429-11	CARBON	10K	5%	1/4W
R1441	1-249-429-11	CARBON	10K	5%	1/4W
R1442	1-249-429-11	CARBON	10K	5%	1/4W
R1443	1-249-429-11	CARBON	10K	5%	1/4W
R2059	1-249-415-11	CARBON	680	5%	1/4W
R2060	1-249-416-11	CARBON	820	5%	1/4W
R2061	1-249-421-11	CARBON	2.2K	5%	1/4W
R2062	1-249-427-11	CARBON	6.8K	5%	1/4W
R2063	1-249-429-11	CARBON	10K	5%	1/4W
R2235	1-247-804-11	CARBON	75	5%	1/4W
R2236	1-247-895-91	CARBON	470K	5%	1/4W
R2237	1-249-425-11	CARBON	4.7K	5%	1/4W
R2238	1-247-895-91	CARBON	470K	5%	1/4W
R2239	1-249-425-11	CARBON	4.7K	5%	1/4W

SWITCH

S2001	1-692-431-21	SWITCH, TACTILE
S2002	1-692-431-21	SWITCH, TACTILE
S2003	1-692-431-21	SWITCH, TACTILE
S2004	1-692-431-21	SWITCH, TACTILE
S2005	1-692-431-21	SWITCH, TACTILE
S2006	1-692-431-21	SWITCH, TACTILE
S2007	1-692-431-21	SWITCH, TACTILE

REF.NO.		PART NO.	DESCRIPTION	REMARK

HZ

* A-1372-117-A HZ BOARD, COMPLETE
(KV-29VL65A only)

CONNECTOR

CN901	*	1-580-843-11	PIN, CONNECTOR (POWER)
CN902	*	1-580-843-11	PIN, CONNECTOR (POWER)

SWITCH

S901	⚠	1-571-433-21	SWITCH, PUSH (AC POWER)

Note:

The components identified with shading and a critical symbol (⚠) are critical for safety. Replace only with part number specified.

Note:

Les composants identifies per un trame et une marque ⚠ sont critiques pout la securite. Ne les remplacer que par une piece portant le numero specifie.

REF.NO.	PART NO.	DESCRIPTION			
K					
*	A-1380-571-A	K BOARD, COMPLETE (KV-27V65/29VL95/29VL65A/29VL65C only)			
	4-382-854-11	SCREW (M3X10), P, SW (+)			
		CAPACITOR			
C1001	1-126-968-11	ELECT	100MF	20%	50V
C1002	1-104-664-11	ELECT	47MF	20%	25V
C1003	1-126-964-11	ELECT	10MF	20%	50V
C1004	1-126-969-11	ELECT	220MF	20%	50V
C1005	1-126-960-11	ELECT	1MF	20%	50V
C1006	1-137-368-11	FILM	0.0047MF	5%	50V
C1007	1-126-960-11	ELECT	1MF	20%	50V
C1401	1-126-957-11	ELECT	0.22MF	20%	50V
C1402	1-126-957-11	ELECT	0.22MF	20%	50V
C1403	1-126-943-11	ELECT	2200MF	20%	25V
C1404	1-126-943-11	ELECT	2200MF	20%	25V
C1405	1-126-382-11	ELECT	100MF	20%	16V
C1406	1-126-382-11	ELECT	100MF	20%	16V
C1450	1-106-387-00	MYLAR	0.068MF	10%	200V
C1451	1-106-387-00	MYLAR	0.068MF	10%	200V
C1452	1-137-368-11	FILM	0.0047MF	5%	50V
C1453	1-137-368-11	FILM	0.0047MF	5%	50V
		CONNECTOR			
CN1001*	1-564-596-11	PLUG, CONNECTOR 15P			
CN1002*	1-564-507-11	PLUG, CONNECTOR 4P			
CN1400*	1-564-507-11	PLUG, CONNECTOR 4P			
CN1401*	1-564-506-11	PLUG, CONNECTOR 3P			
CN1402*	1-564-522-11	PLUG, CONNECTOR 7P			
		IC			
IC1400	8-759-498-09	IC TDA1519AQU			
IC1401	8-759-498-09	IC TDA1519AQU			
		COIL			
L1001	1-408-421-00	INDUCTOR	100UH		
L1002	1-410-470-11	INDUCTOR	10UH		

REF.NO.	PART NO.	DESCRIPTION			
		IC LINK			
PS1400	1-532-984-11	LINK, IC	2A/90V		
PS1401	1-532-984-11	LINK, IC	2A/90V		
		TRANSISTOR			
Q1001	8-729-119-78	TRANSISTOR	2SC2785-HFE		
Q1002	8-729-119-76	TRANSISTOR	2SA1175-HFE		
Q1003	8-729-119-76	TRANSISTOR	2SA1175-HFE		
Q1004	8-729-119-76	TRANSISTOR	2SA1175-HFE		
Q1005	8-729-119-76	TRANSISTOR	2SA1175-HFE		
Q1400	8-729-119-78	TRANSISTOR	2SC2785-HFE		
		RESISTOR			
R1001	1-247-807-31	CARBON	100	5%	1/4W
R1002	1-247-807-31	CARBON	100	5%	1/4W
R1003	1-249-434-11	CARBON	27K	5%	1/4W
R1004	1-249-436-11	CARBON	39K	5%	1/4W
R1006	1-249-419-11	CARBON	1.5K	5%	1/4W
R1007	1-247-863-91	CARBON	22K	5%	1/4W
R1008	1-247-863-91	CARBON	22K	5%	1/4W
R1009	1-247-863-91	CARBON	22K	5%	1/4W
R1010	1-247-863-91	CARBON	22K	5%	1/4W
R1011	1-249-414-11	CARBON	560	5%	1/4W
R1012	1-249-414-11	CARBON	560	5%	1/4W
R1013	1-247-807-31	CARBON	100	5%	1/4W
R1014	1-247-807-31	CARBON	100	5%	1/4W
R1015	1-249-419-11	CARBON	1.5K	5%	1/4W
R1401	1-249-429-11	CARBON	10K	5%	1/4W
R1402	1-249-437-11	CARBON	47K	5%	1/4W
R1433	1-249-420-11	CARBON	1.8K	5%	1/4W
R1434	1-247-863-91	CARBON	22K	5%	1/4W
R1435	1-247-863-91	CARBON	22K	5%	1/4W
R1436	1-249-420-11	CARBON	1.8K	5%	1/4W
R1437	1-247-863-91	CARBON	22K	5%	1/4W
R1450	1-249-426-11	CARBON	5.6K	5%	1/4W
R1451	1-249-426-11	CARBON	5.6K	5%	1/4W
R1452	1-249-425-11	CARBON	4.7K	5%	1/4W
R1453	1-249-425-11	CARBON	4.7K	5%	1/4W
		TUNER			
TU1002 ⚠	8-598-430-00	TUNER, FSS	BTF-FA401		

P

* A-1190-306-A P BOARD, COMPLETE
(KV-27V45/27V65/29VL65C/29VL85/29VL95 only)

* A-1195-129-A P BOARD, COMPLETE
(KV-29VL65A only)

CAPACITOR

REF.NO.	PART NO.	DESCRIPTION			REMARK
C3319	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C3320	1-126-960-11	ELECT	1MF	20%	50V
C3321	1-163-239-11	CERAMIC CHIP	33PF	5%	50V
C3322	1-163-239-11	CERAMIC CHIP	33PF	5%	50V
C3323	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C3324	1-126-967-11	ELECT	47MF	20%	16V
C3326	1-163-229-11	CERAMIC CHIP	12PF	5%	50V
			(KV-29VL65A only)		
C3327	1-163-229-11	CERAMIC CHIP	12PF	5%	50V
			(KV-29VL65A only)		
C3328	1-126-967-11	ELECT	47MF	20%	16V
C3329	1-126-967-11	ELECT	47MF	20%	16V
C3330	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C3331	1-126-967-11	ELECT	47MF	20%	16V
C3332	1-104-664-11	ELECT	47MF	20%	25V
C3334	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C3335	1-163-038-91	CERAMIC CHIP	0.1MF		25V
C3336	1-163-038-91	CERAMIC CHIP	0.1MF		25V
C3337	1-164-005-11	CERAMIC CHIP	0.47MF		25V
C3340	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C3346	1-163-251-11	CERAMIC CHIP	100PF	5%	50V
C3347	1-126-960-11	ELECT	1MF	20%	50V
C3348	1-126-967-11	ELECT	47MF	20%	16V
C3350	1-163-259-91	CERAMIC CHIP	220PF	5%	50V
C3352	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C3353	1-164-346-11	CERAMIC CHIP	1MF		16V
C3354	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C3355	1-126-967-11	ELECT	47MF	20%	16V
C3359	1-163-038-91	CERAMIC CHIP	0.1MF		25V
C3360	1-163-038-91	CERAMIC CHIP	0.1MF		25V
C3361	1-163-038-91	CERAMIC CHIP	0.1MF		25V
C3362	1-126-967-11	ELECT	47MF	20%	16V
C3363	1-163-031-11	CERAMIC CHIP	0.01MF		50V
C3364	1-163-231-11	CERAMIC CHIP	15PF	5%	50V
C3365	1-163-133-00	CERAMIC CHIP	470PF	5%	50V
C3366	1-164-005-11	CERAMIC CHIP	0.47MF		25V
C3367	1-126-963-11	ELECT	4.7MF	20%	50V
C3368	1-164-005-11	CERAMIC CHIP	0.47MF		25V
C3369	1-163-251-11	CERAMIC CHIP	100PF	5%	50V
C3370	1-164-346-11	CERAMIC CHIP	1MF		16V
C3371	1-163-017-00	CERAMIC CHIP	0.0047MF	10%	50V
C3372	1-164-005-11	CERAMIC CHIP	0.47MF		25V
C3393	1-164-005-11	CERAMIC CHIP	0.47MF		25V
			(KV-29VL65A only)		
C3394	1-164-005-11	CERAMIC CHIP	0.47MF		25V
			(KV-29VL65A only)		
C3395	1-163-038-91	CERAMIC CHIP	0.1MF		25V
			(KV-29VL65A only)		
C3396	1-163-038-91	CERAMIC CHIP	0.1MF		25V
			(KV-29VL65A only)		

CONNECTOR

CN3301*	1-691-632-21	CONNECTOR, BOARD TO BOARD 15P	

IC

IC3000	8-759-378-17	IC TDA4662T-V2 (KV-29VL65A only)	
IC3302	8-759-231-53	IC TA7805S	
IC3303	8-759-438-61	IC SDA9288X-A141	
IC3304	8-752-086-80	IC CXA2019AQ-T4	

COIL

L3302	1-410-473-11	INDUCTOR	18UH

TRANSISTOR

Q3301	8-729-422-27	TRANSISTOR	2SD601A-Q
Q3307	8-729-422-27	TRANSISTOR	2SD601A-Q
Q3309	8-729-422-27	TRANSISTOR	2SD601A-Q
Q3310	8-729-422-27	TRANSISTOR	2SD601A-Q
Q3312	8-729-216-22	TRANSISTOR	2SA1162-G
Q3314	8-729-216-22	TRANSISTOR	2SA1162-G

RESISTOR

R3301	1-216-295-91	SHORT			
R3302	1-216-295-91	SHORT			
R3312	1-216-037-00	RES, CHIP	330	5%	1/10W
R3313	1-216-295-91	SHORT			
R3314	1-216-049-91	RES, CHIP	1K	5%	1/10W
R3322	1-216-295-91	SHORT			
R3324	1-216-295-91	SHORT			
R3329	1-216-069-00	RES, CHIP	6.8K	5%	1/10W
R3330	1-216-035-00	RES, CHIP	270	5%	1/10W
R3331	1-216-295-91	SHORT			

REF.NO.	PART NO.	DESCRIPTION			REMARK
R3335	1-216-295-91	SHORT			
R3337	1-216-033-00	RES, CHIP	220	5%	1/10W
R3338	1-216-033-00	RES, CHIP	220	5%	1/10W
R3339	1-216-057-00	RES, CHIP	2.2K	5%	1/10W
R3340	1-216-041-00	RES, CHIP	470	5%	1/10W
R3341	1-216-057-00	RES, CHIP	2.2K	5%	1/10W
R3342	1-216-057-00	RES, CHIP	2.2K	5%	1/10W
R3343	1-216-073-00	RES, CHIP	10K	5%	1/10W
R3344	1-216-065-91	RES, CHIP	4.7K	5%	1/10W
R3346	1-216-049-91	RES, CHIP	1K	5%	1/10W
R3347	1-216-073-00	RES, CHIP	10K	5%	1/10W
R3352	1-216-049-91	RES, CHIP	1K	5%	1/10W
R3355	1-216-051-00	RES, CHIP	1.2K (KV-29VL65A only)	5%	1/10W
R3356	1-216-051-00	RES, CHIP	1.2K (KV-29VL65A only)	5%	1/10W
R3358	1-216-295-91	SHORT			
R3360	1-216-295-91	SHORT			
R3362	1-216-043-91	RES, CHIP	560	5%	1/10W
R3363	1-216-043-91	RES, CHIP	560	5%	1/10W
R3364	1-216-043-91	RES, CHIP	560	5%	1/10W
R3369	1-216-053-00	RES, CHIP	1.5K	5%	1/10W
R3370	1-216-053-00	RES, CHIP	1.5K	5%	1/10W
R3371	1-216-033-00	RES, CHIP	220	5%	1/10W
R3375	1-216-037-00	RES, CHIP	330	5%	1/10W
R3376	1-216-071-00	RES, CHIP	8.2K	5%	1/10W
R3377	1-216-073-00	RES, CHIP	10K	5%	1/10W
R3378	1-216-053-00	RES, CHIP	1.5K	5%	1/10W
R3379	1-216-077-00	RES, CHIP	15K	5%	1/10W
R3380	1-216-025-91	RES, CHIP	100	5%	1/10W
R3381	1-216-025-91	RES, CHIP	100	5%	1/10W
R3382	1-216-057-00	RES, CHIP	2.2K	5%	1/10W
R3383	1-216-025-91	RES, CHIP	100	5%	1/10W
R3384	1-216-033-00	RES, CHIP	220	5%	1/10W
R3385	1-216-109-00	RES, CHIP	330K	5%	1/10W
R3387	1-216-295-91	SHORT			
R3388	1-216-295-91	SHORT			
R3392	1-216-295-91	SHORT			
R3393	1-216-025-91	RES, CHIP	100	5%	1/10W
R3394	1-216-025-91	RES, CHIP	100	5%	1/10W
R3395	1-216-061-00	RES, CHIP	3.3K	5%	1/10W
R3401	1-216-295-91	SHORT			

CRYSTAL

REF.NO.	PART NO.	DESCRIPTION	REMARK
X3302	1-760-095-21	VIBRATOR, CRYSTAL	
X3303	1-577-611-11	OSCILLATOR, CERAMIC	
X3304	1-567-505-11	OSCILLATOR, CRYSTAL	
X3350	1-579-973-11	VIBRATOR, CRYSTAL	(KV-29VL65A only)
X3351	1-579-973-11	VIBRATOR, CRYSTAL	(KV-29VL65A only)

REF.NO.	PART NO.	DESCRIPTION	REMARK

KV-27V40/29VL40

ACCESSORIES AND PACKING MATERIALS

3-861-907-21 MANUAL INSTRUCTION (KV-27V40)
3-861-918-41 MANUAL INSTRUCTION (KV-29VL40)
4-041-255-01 BAG PROTECTION
4-054-059-01 CUSHION (UPPER)
4-054-062-01 CUSHION (LOWER)

4-065-733-01 CARTON INDIVIDUAL (KV-27V40)
4-065-734-01 CARTON INDIVIDUAL (KV-29VL40)

REMOTE COMMANDER

1-475-801-11 REMOTE COMMANDER (RM-Y165)
4-978-977-01 BATTERY COVER (FOR REMOTE)

KV-27V65/29VL95

ACCESSORIES AND PACKING MATERIALS

3-861-907-21 MANUAL INSTRUCTION (KV-27V65)
3-861-918-41 MANUAL INSTRUCTION (KV-29VL95)
4-041-255-01 BAG PROTECTION
4-054-059-01 CUSHION (UPPER)
4-054-062-01 CUSHION (LOWER)

4-065-733-01 CARTON INDIVIDUAL (KV-27V65)
4-065-734-01 CARTON INDIVIDUAL (KV-29VL95)

REMOTE COMMANDER

1-475-802-11 REMOTE COMMANDER (RM-Y167)
4-978-977-01 BATTERY COVER (FOR REMOTE)

KV-29VL65A

ACCESSORIES AND PACKING MATERIALS

3-861-824-41 MANUAL INSTRUCTION
4-041-255-01 BAG PROTECTION
4-054-059-01 CUSHION (UPPER)
4-054-062-01 CUSHION (LOWER)
4-065-734-01 CARTON INDIVIDUAL

REMOTE COMMANDER

1-475-802-11 REMOTE COMMANDER (RM-Y167)
4-978-977-01 BATTERY COVER (FOR REMOTE)

REF.NO.	PART NO.	DESCRIPTION	REMARK

KV-27V45/29VL85

ACCESSORIES AND PACKING MATERIALS

3-861-907-21 MANUAL INSTRUCTION (KV-27V45)
3-861-918-41 MANUAL INSTRUCTION (KV-29VL85)
4-041-255-01 BAG PROTECTION
4-054-059-01 CUSHION (UPPER)
4-054-062-01 CUSHION (LOWER)

4-065-733-01 CARTON INDIVIDUAL (KV-27V45)
4-065-734-01 CARTON INDIVIDUAL (KV-29VL85)

REMOTE COMMANDER

1-475-802-11 REMOTE COMMANDER (RM-Y167)
4-978-977-01 BATTERY COVER (FOR REMOTE)

KV-29VL65C

ACCESSORIES AND PACKING MATERIALS

3-861-918-41 MANUAL INSTRUCTION
4-041-255-01 BAG PROTECTION
4-054-059-01 CUSHION (UPPER)
4-054-062-01 CUSHION (LOWER)
4-065-734-01 CARTON INDIVIDUAL

REMOTE COMMANDER

1-475-802-11 REMOTE COMMANDER (RM-Y167)
4-978-977-01 BATTERY COVER (FOR REMOTE)

Sony Corporation
Sony Technology Center
Product Quality Division
Service Promotion Department

English
98DJ74425-1
Printed in U.S.A.
© 1998.4

9-965-842-01